




	ABOUT RUBI GROUP	
Г	Introduction	04
	MANUAL TILE CUTTING	
П	Manual Tile CuttersScoring wheels and accessories for manual cutters	
	SLAB SYSTEM. Cutting and handling large-sized tile	
	Cutting large tile	74
	ELECTRIC TILE CUTTING	
L	Electric cutters and mitre saws Circular Saw, Bevelling and Vacuum Cleaner	
<u></u>	DIAMOND BLADES	
	Dry cutting diamond blades Wet cutting diamond blades	
<u> </u>	DRILLING	
П	Tools for drilling ceramic tile, stoneware, marble, granite and other materials	126
	GRINDING & POLISHING	
	Grinding wheels and blades	



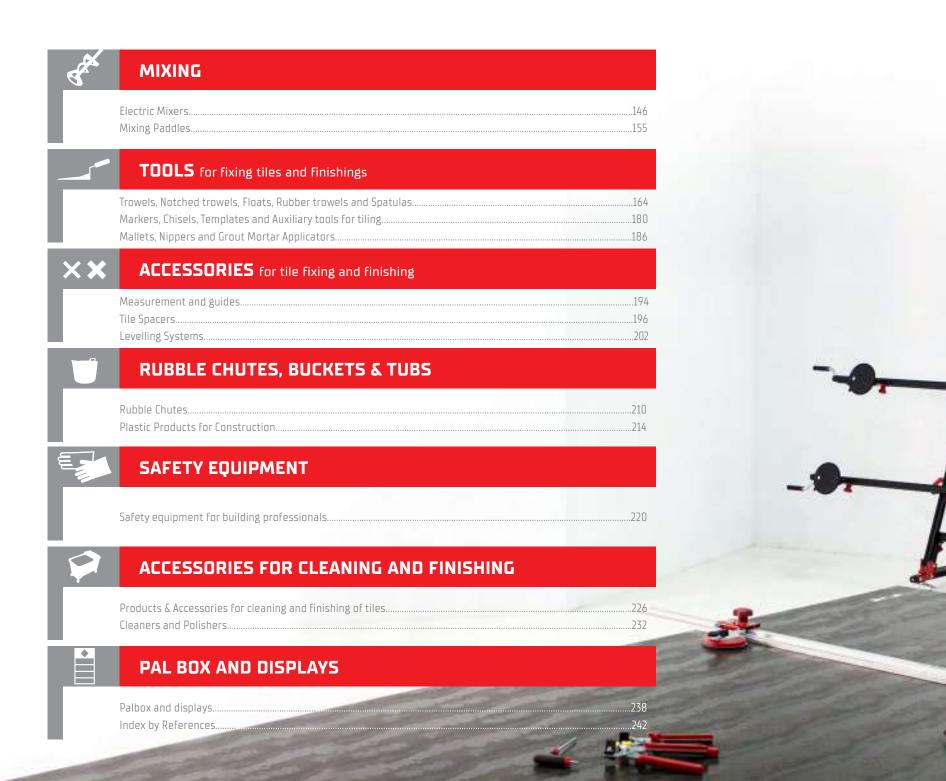

PURPOSE

BETTER PROFESSIONALS, BETTER PLACES

Our "Better professionals. Better places" purpose explains our approach in the two key areas that improve the quality and performance of our industry: those people whose trade is visible to everybody so that it can be admired, along with the places transformed by their creativity. We want to change the future by being and creating better professionals and building better places in favour of a better world.

1. GRUPO RUBI

MISSION

Our mission is to provide outstanding solutions for construction professionals, through the design, manufacture and distribution of tools and equipment which ensure maximum efficiency, cost-effectiveness and safety for optimal ceramic tile laying, thereby maintaining the identity of the Boada brothers as well as their corporate legacy so that we can all build a better future together.

VISION

Our vision is to be a leading company at global level in solutions for cutting and laying tiles as a result of technological innovation and proximity to the user, thus improving the quality of life of our customers, partners, shareholders and society.



THE BEST OPTION FOR EACH JOB SINCE 1951

Our history began in 1951, when brothers Joan and Antoni Boada i Sucarrats obtained the patent for their innovative tool for cutting hydraulic mosaic, glazed and ceramic tiles. Together, they produced 25 units in the garage of their house in Rubí, Catalonia. The new "RUBI mosaic and tile cutter" made its appearance at the first National Invention Exhibition in Barcelona, where it won the diploma of honour and gold medal.

The Boada brothers devoted themselves to developing and sharing their innovative technology with other professionals. In 1969, Mr Miquel Escayol i Vila joined them and the limited company Hermanos Boada S.A. was created.

Since then, the reputation of the company has spread throughout the world and the RUBI name has become synonymous with truly cutting-edge solutions that offer top craftsmen an unprecedented level of quality, efficiency and professionalism.

Thus, the RUBI Group specialises in the design, manufacture and distribution of machinery and tools for cutting, laying and maintaining tiles. Placing installers at the centre of our strategy means that innovation, high product quality and excellence are always present in our product range.

Currently, the RUBI brand is recognised by the most demanding construction and design professionals in more than 120 countries, thanks to our large international network of subsidiaries and branches.

The RUBI team works with the opportunities that new trends and technologies offer, as well as the advances relating to communication, safety and environmental responsibility, in order to lead in the construction sector, while staying faithful to our core values and devotion to providing solutions to the needs of tile installers around the world.

WE PROVIDE QUALITY AND INNOVATION TO THE WORLD







People in the RUBI Team



Production and logistics centres



International subsidiaries



Corporate museum



Countries with RUBI brand distribution



Official distributors



The RUBI Group has three production centres: Santa Oliva (Spain), Suzhou (China) and Miami (USA). They are all equipped with the latest production and logistics technology to ensure that we obtain high-quality products and a shipping service which minimises delivery times.

RUBI's 11 subsidiaries cover global demand and the training and after-sales service, together with our trusted distributors, so we are always close to the user and can offer them solutions adapted to the characteristics of each market.

CORPORATE MUSEUM

Since 1951, the RUBI team has been working to dignify the construction trades. For this reason, in 2003, together with the launch of RUBI's main production centre, we opened our "Construction Tools" corporate museum, which is also located in Santa Oliva, Tarragona. This original space shows everything from the evolution of tools in the sector to that of RUBI's own manual cutter, as well as taking a historical journey through the Group's more than 70 years of history.

The space is open to professionals and students who can, in an educational way, consider our historical collection of construction tools, which includes RUBI's own tools, a private collection of tools belonging to the Gaudí Foundation, the extensive showroom with the entire RUBI catalogue and an area with the 5 stages of the tiling process. An experimentation area is also provided for students who visit us, so they can test their skills in cutting and tile laying first-hand using the mosaic technique.



2. INNOVATION & QUALITY

The essence of the RUBI brand is "a job well done". The perfect synthesis of our commitment to the goal of contributing best practices and performance to tiling worldwide. The above statement can be clearly appreciated in everything we do, and in the way our customers can use the products that we manufacture to carry out their work with special attention to quality, creativity and attention to detail.

A JOB WELL DONE



INNOVATION

We are constantly researching and developing new solutions based on the evolution of market and technology trends, our own experience and ongoing conversations with our partners and other <u>professionals</u>.

QUALITY

We only use materials of the highest quality and we work in compliance with strict design and manufacturing standards in order to offer tools with the performance levels that our users expect.

GUARANTEE

We strive to offer greater durability in our products and a peace of mind that comes from our long track record, also backed up by a customer support service and constant communication with the same global nature.

SOLUTIONS

Understanding and helping to shape our industry for generations has allowed us to create a wide range of tools that provide excellence and efficiency in the cutting and laying of tiles.

TECHNOLOGICAL LEADERSHIP



References in the catalogue.



Patented products.



60% of RUBI products have been developed internally over the last 5 years.





3. RUBI COMMITMENT

The RUBI Group works with a sustainable development model, which respects the environment and prioritises equal opportunities. Our Corporate Social Responsibility strategy covers the three sustainability areas: social, environmental and economic. For this reason, it is based on 8 of the 17 SDGs (Sustainable Development Goals 2015–2030) of the United Nations, which are also in-line with our corporate purpose.

"Environmental and sustainability policies should be the obligation of the RUBI Team. Only in a fairer, more equal and more sustainable world can we continue growing and working together with society and our environment."

Josep Munné General Manager at RUBI Group





4. GRUPO RUBI

At Rubi we are a multidisciplinary team with great expertise and ongoing training.

The RUBI Team, made up of more than 650 professionals, works in the numerous subsidiaries and branches that the RUBI Group has at international level.

OUR DAY-TO-DAY WORK IS ALWAYS CARRIED OUT ACCORDING TO THE 3 RUBI VALUES





EXCELLENCE

Excellence defines us in all we do, thanks to our experience, flexibility and innovation. We strive each day to offer the best in our innovative products and our relationships with partners in the sector.

RESPECT

Respect is present in our DNA, our relationships within the RUBI Team and with customers, suppliers and other stakeholders, which allows us to create a close and dynamic environment.

PASSION

Passion is what drives us in our attitude to our work through commitment, optimism and determination. Our long history demonstrates a sustained enthusiasm over time – we love to inspire others.







TRAINING A FUNDAMENTAL DILLAD OF BURI'S

PILLAR OF RUBI'S VALUE PROPOSITION




FOLLOW US ON OUR
YOUTUBE CHANNEL TO
SEE ALL THE TRAINING
VIDEOS

The main aim of the RUBI Academy is to empower tiling professionals so they can build better places through inperson or online training from our experts, always with the premise of offering very useful quality and cutting-edge knowledge for those interested in continuous learning.

Through guided and ongoing training, the RUBI Academy has positioned itself as a benchmark in the sector that is capable of hosting qualitative content for future professionals through Vocational Training programmes. This is a result of collaborative alliances with schools and institutes; specialising installers already active with any employment status, whether self-employed or employed; promoting the role of women within the tiling industry by providing support, guidance and the tools necessary for equality in the workplace; and to reactivate those who are unemployed by providing them with the skills and knowledge to rejoin the labour market.

Furthermore, the RUBI Academy has been designed as a cross-sector space where institutions linked to the tiling world converge, which allows for the creation of a synergy of efforts and talents with other actors in the industry. Adhesive, ceramics ranges, experts and departments linked to the sector find our school, located in Santa Oliva del Penedés, to be a suitable space for testing new products and new materials. This allows innovative tools to be developed that are capable of facilitating the delicate process of tile installation and, consequently, offering our stakeholders first-hand and up-to-date teaching materials so that, together and in step, we can complete the mission that we have undertaken: better professionals, better places.

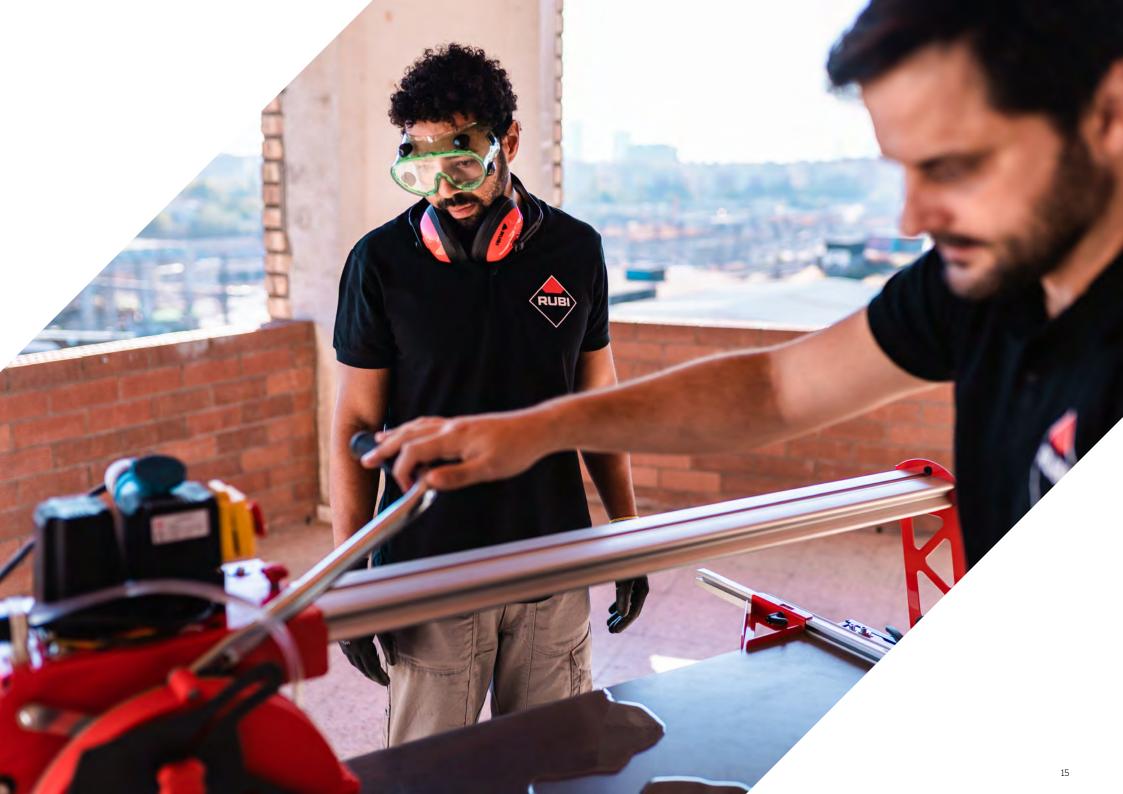





AFTER-SALES

Always with the intention of satisfying the highest expectations of our customers around the world, the RUBI after-sales department, together with the extensive network of official technical services, concentrates its efforts on supporting the brand in a timely and efficient manner in the management of incidents, queries and needs of our customers and users.

Thanks to this vision, we can offer shorter response times, while guaranteeing the promised performance in each of our tools and thus achieving an extended, long-lasting and satisfactory purchase experience as a response to the trust placed in us by each of our users.

To fulfil this promise to our customers, RUBI has the following contact methods:







www.rubi.com aftersales@rubi.com

+34 936 80 65 00







THE APP THAT REWARDS YOUR TRUST IN-US

Get money back on all your purchases



REGISTRA PRODUCTO

DOWNLOAD IT AND START ACCUMULATING POINTS

rubi.com











INSTALLATION IN PHASES

RUBI offers solutions that provide excellence in each step of the tiling process in order to guarantee quality, efficiency and creativity from start to finish. This is the basis for a clear marking on our entire range of products, with each product clearly indicating the stage it is intended for:

This approach provides a clear visual solution for product displays that directs the customer to the product that is suitable for the work in question.











1. Preparation

This stage includes all the processes prior to the installation of ceramic tiles. Starting with the preparation and levelling of the substrates and the verification of the levels. Followed by the setting out and design of the joint pattern and finishing with the preparation and application of the ceramic adhesive.



2. Cutting and Drilling

Although, after the preparation of the adhesive, this logically takes us to the installation stage, RUBI has included the cutting and drilling phase in second place. The reason is very simple, if we take into account that the tile needs to be cut (or drilled), it cannot be installed until this step has been carried out.

All installations require tiles to be adapted and resized to the installation space and, whether it is to a greater or lesser extent, a ceramic tile will always have to be cut (or drilled).



3. Installation

In this stage, we mainly focus on bringing together all the necessary tools to ensure proper handling and installation of the tile, how to obtain the best results both in flatness and alignment in order to make the setting-out design a reality with maximum precision.



4. Grouting

As its name indicates, this stage includes all the tools necessary for the filling and definition of the tile joint, as well as the removal of excess material and a first cleaning stage.



5. Cleaning

As it must do, the last stage brings together everything that is necessary to deliver the perfect job. The final cleaning of any ceramic tile installation process will always make the first impression on any user. For this reason, it is as important as any of the previous stages.





MANUAL TILE CUTTING

Manual Tile Cutters
Scoring wheels and accessories for manual cutters


















BASIC







INTENSIVE USE

PROFESSIONAL USE

Amimimimimimi	
45°	
•	
FIXED 0° / 45°	

FIXED 0° / 45°
ADJUSTABLE FROM 0° - 45°
45°

	FIXED 0° / 45°
CASIONAL USE	450
	FIXED 0° / 45°

5			3					
	cm	inch		cm	inch		cm	inch
TZ	155	61"	TZ	155	61"	TZ	155	61"
TX-MAX	125	49 3/16"	TX-MAX	125	49 3/16"	TX-MAX	125	49 3/1
TP	93	36 ^{5/8} "	TP	93	36 ^{5/8} "	TP	93	36 ^{5/8}
			TQ	102	40"	ΤQ	102	40"
			TR-MAGNET	71	28"	TR-MAGNET	71	28"
			TS-MAX	75	29"	TS-MAX	75	29"
			SPEED-MAGNET	92	36"	SPEED-MAGNET	92	36"
TZ	155	61"	TZ	155	61"	TZ	155	61"
TX-MAX	125	49 3/16"	TX-MAX	125	49 3/16"	TX-MAX	125	49 3/1
TP	93	36 ^{5/8} "	TP	93	36 ^{5/8} "	TP	93	36 ^{5/8}
TR-MAGNET	71	28"	TR-MAGNET	71	28"	TR-MAGNET	71	28"
ΤQ	102	40"	ΤQ	102	40"	ΤQ	102	40"
				-				
TS-MAX	75	29"	TS-MAX	75	29"	TS-MAX	75	29"
SPEED-MAGNET	92	36"	SPEED-MAGNET	92	36"	SPEED-MAGNET	92	36"
			SPEED-N	92	36"	SPEED-N	92	36"
			FAST	85	35"	FAST	85	35"
			STAR PLATINUM	63	24"	STAR PLATINUM	63	24"
			STAR	63	24"	STAR	63	24"
CDEED N	02	36"	CDEED N	92	7/11	SPEED-N	92	36"
SPEED-N FAST	92 85	35"	SPEED-N FAST	92 85	36" 35"	SPEED-N FAST	92 85	35"
STAR PLATINUM	65	26"	STAR PLATINUM	63	24"	STAR PLATINUM	63	24"
		20	STAR	63	24"	STAR	63	24"
			POCKET	51	20 1/16"	POCKET	51	20 1/1
			PRACTIC	61	24 1/16"	PRACTIC	61	24 1/1





XX

TECHNICAL SPECIFICATIONS

	MÁX	MÁX 🔷	MÁX			
	155 cm	110 x 110 cm	3-21 mm	1500 kg		33 kg
TZ	61 1/16"	43 ^{5/16} x 43 ^{5/16} "	1/8-13/16"	3307 Lb	-	73 Lb
TX-MAX	125 cm	85 x 85 cm	3-21 mm	1200 kg		26 kg
I X-MAX	49 3/16"	33 ^{7/16} x 33 ^{7/16} "	1/8-13/16"	2646 Lb		57 Lb
TR-MAGNET	71 cm	50 x 50 cm	3-15 mm	800 kg		15,5 kg
IR-MAUNEI	27 15/16"	20 x 20"	1/8-9/16"	1764 Lb		34.2 Lb
TQ	102 cm	70 x 70 cm	5-15 mm	800 kg	16,8 kg	
ı v	40 3/16"	27 9/16 x 27 9/16"	3/16 - 9/16"	1764 Lb	37 Lb	
TP-S	125 cm	85 x 85 cm	5-20 mm	1000 kg	15.9 kg	
IP-5	49 3/16"	33 ^{7/16} x 33 ^{7/16} "	3/16-13/16"	2205 Lb	35.1 Lb	
TP-T	125 cm	85 x 85 cm	5-20 mm	1000 kg	15.9 kg	
IP-I	49 3/16"	33 ^{7/16} x 33 ^{7/16} "	3/16-13/16"	2205 Lb	35.1 Lb	
TS-MAX	75 cm	53 x 53 cm	6-15 mm	800 kg	_	15,1 kg
IJ-MAA	29 1/2"	20 ^{7/8} x 20 ^{7/8} "	1/4-9/16"	1764 Lb		33.3 Lb
SPEED MAGNET	92 cm	65 x 65 cm	3-15 mm	800 kg	12 kg	16,5 kg
JPEED MAURE!	36 ^{1/4} "	25 ^{9/16} x 25 ^{9/16} "	1/8-9/16"	1764 Lb	26 Lb	36.4 Lb
SPEED-N	92 cm	65 x 65 cm	5-15 mm		11 kg	15.9 kg
JPLLD-N	36 ^{1/4} "	25 ^{9/16} x 25 ^{9/16} "	3/16 - 9/16"		24 Lb	35 Lb
FAST	85 cm	60 x 60 cm	12 mm		7,5 kg	8.5 kg
ואסו	33 7/16"	24 x 24"	1/2"		16.5 Lb	18.7 Lb
STAR PLATINUM	65 cm	45 x 45 cm	12 mm		4,8 kg	6 kg
JIAN PLAIINUM	25 ^{9/16"}	17 ^{11/16} x17 ^{11/16} "	1/2"		10.6 Lb	13.2 Lb
STAR	63 cm	45 x 45 cm	12 mm		4,3 kg	6,5 kg
JIAN	25 9/16"	17 ^{11/16} x17 ^{11/16} "	1/2"		9.5 Lb	14.3 Lb
POCKET	51 cm	36 x 36 cm	12 mm	_	3.4 kg	3.9 kg
POCKET	20 ^{1/16} "	14 ^{3/16} x14 ^{3/16} "	1/2"		7.5 Lb	8.6 Lb
PRACTIC	61 cm	43 x 43 cm	10 mm	_	4,9 kg	
PRACTIC	24 1/16"	16 ^{15/16} x16 ^{15/16} "	3/8"		10.8 Lb	
BASIC	61 cm	43 x 43 cm	10 mm	_	3,5 kg	
אוכאני	24 1/16"	16 ^{15/16} x16 ^{15/16} "	3/8"		7.7 Lb	

The information corresponds to the largest model of each machine.



##

<u></u>

XX





For intensive cutting of all types of ceramic and porcelain tiles.



- Powerful breaking system (up to 1.500 kg), operable with just one hand.
- 2 Accurate with soft slider movements.
- Large cutting capacity, up to 21mm thickness. Ideal for large format tiles*.
- Robust with a foldable structure for high strength and easy transportation.
- Excellent performance breaking system: Clean cuts with soft
- · Robust chassis, guides and breaking system.
- · Swivel square with central pivot for fast and accurate measurements in angle cutting.
- · Adjustable lateral stop for repetitive cuts.
- · Support base for excellent tile placement.
- · Easy to transport: rubber wheels with bearings and handle.
- · Interchangeable scoring wheels ranging from 0 8mm -22mm.
- · Includes 0 8 mm SILVER and 0 22 mm EXTREME scoring wheels. Reinforced textile bag for transport and protection.
- · On models 1300/1550:
- -The reinforced textile bag of these models includes 2 built-in wheels.

	Accessories:
bear	Ref. 18980 Maintenance Kit

























	REF	\triangle									
TZ-850	17952	PREMIUM	DEMILIA J	33 7/16"	24x24"	1/8-13/16"	3307 Lb	49.4 Lb	1	12	
12 030	1/952	1/952 1	PREMIUM	V	85 cm	60x60 cm	3-21 mm	1500 kg	22.4 kg	1	12
TZ-1020	170F1 DDFMIII	PREMIUM	ما	40 3/16"	27 9/16x27 9/16"	1/8-13/16"	3307 Lb	54.2 Lb	1	17	
12-1020	17951	PREMIUM	V	102 cm	cm 70x70 cm 3-21 mm 150		1500 kg	24.6 kg	1	12	
TZ-1300	17077 - DDFALL	DDEMILIM	ما	51 3/16"	35 7/16x35 7/16"	1/8-13/16"	3307 Lb	66 Lb	1	Q	
12-1300	17953	PREMIUM	V	130 cm	90x90 cm	3-21 mm	1500 kg	30 kg	1	9	
TZ-1550	17954 PF	PREMIUM	2/	61 1/16"	43 5/16x43 5/16"	1/8-13/16"	3307 Lb	73 Lb	1		
12-1330	1/954	PREMIUM	V	155 cm	110x110 cm	3-21 mm	1500 kg	33 kg	1	0	

^{*}Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.































TX-MAX

For professional cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.

























	REF	\triangle					~			
TX-710 MAX	17909 P	PREMIUM	2/	27 15/16"	20x20"	1/8-13/16"	2646 Lb	29.3 Lb	1	10
1	1/707	PKLIVIIUIVI	V	71 cm	50x50 cm	3-21 mm	1200 kg	13.3 kg	1	10
TX-1020 MAX	17915	DDEMILIM	2	40 3/16"	27 9/16x27 9/16	" 1/8-13/16"	2646 Lb	42.8 Lb	1	10
1A-1UZU MAA		1/915	PREMIUM	V	102 cm	70x70 cm	3-21 mm	1200 kg	19.4 kg	1
TX-1250 MAX	17921	PREMIUM	2/	49 3/16"	33 7/16x33 7/16	" 1/8-13/16"	2646 Lb	57 Lb	1	10
IN-IZOU MAN	1/721	PREMIUM	V	125 cm	85x85 cm	3-21 mm	1200 kg	26 kg	1	10


^{*} There are some materials over 15mm thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product

- Highly precise scoring.
- 2 Entire system highly efficient.
- Reinforced components. Heavy duty.
- High breaking power (1,200 kg) MASTER POWER. One-handed operation.
- · Head with extra-long aluminium sliders with "self-lubricating" friction bearings.
- · Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- · The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking for faster use. Increases performance with both thin and thick materials.
- · Injected-aluminium base, reinforced with a central rib, for increased strength.
- · Floating tables and supplementary arms for large-size ceramic tile, increases cutting stability.
- · Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with 0 8 mm SILVER and 0 22 mm EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- · Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).

Accessories



Ref. 18980 Maintenance Kit

































TR-MAGNET

Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.



- Fast operating system with magnet, for one handed use.
- 2 Reinforced operating material. Increased breaking power.
- Revolving square with central pivot for fast and accurate measurements for cutting angles.
- 4 Floating base with shock absorber for better tile breaking.
- · Solid steel guides, Ø 20 mm, chrome-plated and rectified, with anti-corrosion treatment for increased torsional strength.
- · Multipoint breaker 800 kg of power.
- · Heavy-duty metal arms.
- · Handle reinforced with SOFT-GRIP.
- · Lateral end stop for making repetitive cuts.
- · Base extension for large sizes.
- · Two-layer base with shock-absorbing effect.
- · High-strength aluminium base.
- · Interchangeable scoring wheels from 6 to 22 mm.
- · With 0 10mm SILVER and 0 22mm EXTREME scoring wheels and carrying case included.


	Accessories
Bu	Ref. 18980 Maintenance Kit



















	REF	\triangle					\	Å		
TR-600 MAGNET	17000	SUPERPRO	2/	24"	16 9/16x16 9/16"	1/8-9/16"	1764 Lb	30.6 Lb	2	18
IR-DUU MAUNEI	1/703	ט טייבאירעט	V	60 cm	42x42 cm	cm 3-15 mm 80	800 kg	13.9 kg	2	10
TD 710 MACNET	17906	SUPERPRO	ما	27 15/16"	20x20"	1/8-9/16"	1764 Lb	34.2 Lb	1	15
TR-710 MAGNET	1/900	SUPERPRU	V	71 cm	50x50 cm	3-15 mm	800 kg	15.5 kg	1	15































Cut & Drill

Ideal for professional cutting of porcelain stoneware and intensive cutting of glazed stoneware tiles.



- Single-guide head with 6 radial bearings for smoother, more precise sliding.
- 2 Self-adjusting bearing system (Patented). Does not require any adjustment by the user.
- The breaker can be locked and unlocked with one hand for faster use.
- Rotating square, with central pivot point. Greater precision in angle cuts.
- · High precision.
- · Chrome-plated trapezoidal guide.
- · Rotating square, with central pivot point. More precise angle
- · Injected aluminum base for greater robustness.
- · With lateral end stop for repetitive cuts and thin strips.
- · Equipped with 2 additional arms for large-sized ceramic or porcelain tiles (Model 102).
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with 022 mm EXTREME scoring wheel. For ceramic tiles with rough or structured surfaces. Compatible with 022 mm scoring wheel (ref. 18914) for tiles with smooth surfaces.

	Accessories
Ď r	Ref. 18980 Maintenance Kit

























	REF	\triangle				W			
T0-66	14907	SUPERPRO	26"	18 1/8x18 1/8" 46x46 cm	3/16-9/16"	1764 Lb	26 Lb	1	12
10 00			66 cm	46x46 cm	5-15 mm	800 kg	12 kg	1	
TO 7F	14908	SUPERPRO	29 1/2"	20 7/8x20 7/8" 53x53 cm	3/16-9/16"	1764 Lb	28 Lb	1	12
TQ-75			75 cm	53x53 cm	5-15 mm	800 kg	12.7 kg	1	
TQ-102	14909	SUPERPRO	40 3/16"	27 9/16x27 9/16"	3/16-9/16"	1764 Lb	37 Lb	1	12
			102 cm	70x70 cm	5-15 mm	800 kg	16.8 kg	1	































Ideal for high quality cutting of ceramic and porcelain tiles.





- ☐ Guide system highly resistant to impacts resulting in longer product life.
- 2 Ergonomic handle with incorporated separator for greater speed and ease of use.
- 3 Swivel bracket with central pivot for fast and accurate measurements.
- 4 Long-lasting laser engraved square.
- · Reinforced pressure pad.
- \cdot 12 mm reinforced guide. Greater bending resistance and increased precision.
- · Lateral end stop for making repetitive precision cuts.
- · Two-layer base with shock-absorbing effect. Base extension for large sizes. Carrying handle. (TP-66-S and TP-75-S).
- · Assembly designed to be used by pushing the handle.
- · RUBIFLEX bi-material handle.
- · 0 22mm EXTREME scoring wheel included. (Ref. 01901)

	Accessories:
Ď o	Ref. 18980 Maintenance Kit





















	REF	\triangle							
TP-66 S	12954	SUPERPRO	26"	18 1/8x18 1/8"	3/16-13/16"	2205 Lb	25.4 Lb	1	12
IF 00 3	12754		66 cm	46x46 cm	5-20 mm	1000 kg	11.5 kg		
TP-75 S	1305/	SUPERPRO	29 1/2"	20 7/8x20 7/8"	3/16-13/16"	2205 Lb	26 Lb	1	12
	12956		75 cm	53x53 cm	5-20 mm	1000 kg	12 kg	1	
TP-102 S	11000	SUPERPRO	40 3/16"	27 9/16x27 9/16"	3/16-13/16"	2205 Lb	39.2 Lb	1	12
	11900		102 cm	70x70 cm	5-20 mm	1000 kg			
TP-125 S	11077	SUPERPRO	49 3/16"	33 7/16x33 7/16"	3/16-13/16"	2205 Lb	54 Lb	1	12
	11973		125 cm	85x85 cm	5-20 mm	1000 kg	24.5 kg		

^{*}Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

































Ideal for high quality cutting of ceramic and porcelain tiles.



- II Single guide system highly resistant to impacts. Longer life.
- 2 Separator set with height adjustment. Optimum separation for each thickness.
- 3 Swivel bracket with central pivot for fast and accurate measurement of angular cuts.
- 4 Long-lasting laser engraved square.
- · Reinforced pressure pad. 12 mm reinforced guide. Greater bending resistance and increased
- · precision. Lateral end stop for making repetitive precision cuts. Two-layer base with shockabsorbing
- effect. Base extension for large sizes. Carrying handle. (TP-66-T and TP-75-T).
- · Assembly designed to be used by pulling the handle.
- · RUBIFLEX bi-material handle. Ergonomic and heavy duty
- Cut thickness adjustment system with 3 settings [6–9 mm/9–12 mm/12-20 mm)*, fast and precise.
- \cdot 0 22mm EXTREME scoring wheel included (Ref. 01901).

	Accessories
Bush	Ref. 18980 Maintenance Kit

















	REF	\triangle			Æ,	\			
TP-66 T	12055	SUPERPRO	26"	18 1/8x18 1/8"	3/16-13/16"	2205 Lb	25.4 Lb		12
1P-00 I	12733	JUPERPRU	66 cm		5-20 mm	1000 kg		1	12
TP-75 T	12957 SU	SUPERPRO	29 1/2"	20 7/8x20 7/8" 53x53 cm	3/16-13/16"	2205 Lb	26 Lb	1	12
I C7-71			75 cm	53x53 cm	5-20 mm	1000 kg	12 kg	1	12
TP-102 T	11001 511	SUPERPRO	40 3/16"	27 9/16x27 9/16"	3/16-13/16"	2205 Lb	36.2 Lb	1	17
17-102 1	11901	SUPERPRU	102 cm	70x70 cm	5-20 mm	1000 kg		1	12
TP-125 T	11974	SUPERPRO	49 3/16"	33 7/16x33 7/16"	3/16-13/16"	2205 Lb	51 Lb	1	17
IP-123 I	11974	SUPERPRU	125 cm	85x85 cm	5-20 mm	1000 kg	23 kg	1	12

^{*}Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.



































TS-MAX

Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.





Progressive breaking system "SMART
POWER" adapts to different material
hardness.

- 2 Wide base. Greater base surface for higher stability and cutting quality.
- Reinforced components for heavy duty work. High durability.
- 4 Ergonomic handles. Maximum comfort.
- · Bigger reinforced base for a higher comfort and better stability when cutting.
- · Powerful single point breaker. Up to 800 kg breaking pressure.
- · Double guide for direct view of scoring/cutting line.
- · Chromed steel guides, rectified and calibrated, with anti-rust treatment.
- · Lateral stop for repetitive straight and 45° cuts.
- · Interchangeable scoring wheels ranging from 0 6mm to 22 mm.
- · Includes 0 8mm ENDURE and 0 10 mm SILVER scoring wheels and a transport case with reinforced locks and hinges.

	Accessories
Ď o	Ref. 18980 Maintenance Kit

















	REF	\triangle								
TS-43 MAX	18920	SUPERPRO	16 15/16"	2/	12x12"	1/4-9/16"	1764 Lb	19.4 Lb	1	24
13-43 IMAA	18920	JUPERPRU	43 cm	V	30x30 cm	6-15 mm	800 kg	8.8 kg	1	24
TS-57 MAX	18921	SUPERPRO	22 7/16"	2/	16x16"	1/4-9/16"	1764 Lb	21.8 Lb	1	24
13-37 IMAA	10721	JUPERPRU	57 cm	V	40x40 cm	6-15 mm	800 kg	9.9 kg	1	24
TS-66 MAX	18922	SUPERPRO	26"	2/	18 1/8x18 1/8"	1/4-9/16"	1764 Lb	29.5 Lb	1	20
13-00 MAX	10722	JUPLKPKU	66 cm	V	46x46 cm	6-15 mm	800 kg	13.4 kg		20
TS-75 MAX	18923	SUPERPRO	29 1/2"	2/	20 7/8x20 7/8"	1/4-9/16"	1764 Lb	33.3 Lb	1	20
I 3 T 3 IVIAA	10723	JUPERPRU	75 cm	V	53x53 cm	6-15 mm	800 kg	15.1 kg	1	20
TS-43 MAX (GREY)	18972	SUPERPRO	16 15/16"	ا	12x12"	1/4-9/16"	1764 Lb	19.4 Lb	1	74
15-45 MAX (UREY)	18972	SUPERPRU	43 cm	V	30x30 cm	6-15 mm	800 kg	8.8 kg	1	24
TE // MAY (EDEV)	1007/	SUPERPRO	26"	ما	18 1/8x18 1/8"	1/4-9/16"	1764 Lb	29.5 Lb	1	20
TS-66 MAX (GREY)	18974	SUPERPRU	66 cm	V	46x46 cm	6-15 mm	800 kg	13.4 kg	1	20
TS-75 MAX (GREY)	18975	CHDEDDDO	29 1/2"	ما	20 7/8x20 7/8"	1/4-9/16"	1764 Lb	33.3 Lb	1	20
13-73 MAN (UKET)	189/3	SUPERPRO	75 cm	V	53x53 cm	6-15 mm	800 kg	15.1 kg	1	20



##

(o)

<u>t</u>















SPEED-MAGNET

For professional cutting all types of ceramic and porcelain tiles.



- Quick speed system with magnet, ideal for one-handed use. Easy and fast to use.
- Great visibility during scoring.
- Reinforced structured elements. High breaking power.
- 4 Aluminum base for robustness. Light and easy to transport.
- · Solid 20mm steel guides. Chromed and rectified with anticorrosion treatment for greater resistance to twisting.
- · Multipoint breaker 800kg power.
- · Reinforced SOFT-GRIP handle.
- · Lateral stop for repetitive cuts and 45 degrees square.
- · Interchangeable scoring wheels ranging between 0 6mm-22mm.
- · Scoring wheel 0 8mm ENDURE. included.
- · Direct view of scoring and cutting line.
- · 72/92 models:
- -Aluminum lateral support.

	Accessories
A.,	Ref. 18980
	Maintenance Kit





















	REF		\triangle								
CDEED AS MACHET WITH CASE	1/000	.1	CHDEDDDO	24 7/16"	17 5/16x17 5/16"	1/8-9/16"	1764 Lb	18 Lb	25.4 Lb		
SPEED-62 MAGNET WITH CASE	14988	V	SUPERPRO	62 cm	44x44 cm	3-15 mm	800 kg	8 kg	11.5 kg	2	24
CDEED 73 MACHET WITH CACE	14000	ء ا	CHDEDDDO	28 3/8"	20 1/16x20 1/16"	1/8-9/16"	1764 Lb	20.9 Lb	30 Lb	٦	10
SPEED-72 MAGNET WITH CASE	14989	V	SUPERPRO	72 cm	51x51 cm	3-15 mm	800 kg	9.5 kg	13.6 kg	2	18
SPEED-92 MAGNET WITH CASE	14990	.1	SUPERPRO	36 1/4"	25 9/16x25 9/16'	' 1/8-9/16"	1764 Lb	26 Lb	37 Lb	1	18
SPEED-92 MAUNET WITH CASE	14990	٧		92 cm	65x65 cm	3-15 mm	800 kg	12 kg	16.8 kg	1	10
SPEED-62 MAGNET	14980	_	SUPERPRO	24 7/16"	17 5/16x17 5/16"	1/8-9/16"	1764 Lb	18 Lb	0 Lb	7	30
SPEED-02 MAUNET	14700	-	JUPERPRU	62 cm	44x44 cm	3-15 mm	800 kg	8 kg	- kg	2	30
SPEED-72 MAGNET	14981	_	SUPERPRO	28 3/8"	20 1/16x20 1/16"	1/8-9/16"	1764 Lb	20.9 Lb	0 Lb	1	35
SPEED-72 MAUNET	14701		JUPERPRU	72 cm	51x51 cm	3-15 mm	800 kg	9.5 kg	- kg	1	ככ
SPEED-92 MAGNET	14982	_	SUPERPRO	36 1/4"	25 9/16x25 9/16	' 1/8-9/16"	1764 Lb	26 Lb	0 Lb	1	28
SPEED-92 MAUNET	14782		SUPERPRU	92 cm	65x65 cm	3-15 mm	800 kg	12 kg	- kg	1	28

































SPEED-N

For professional cutting of ceramic tiles and occasionally for porcelain tiles.





- Reinforced structured elements. High breaking power.
- 2 Chromed and rectified steel guides, with anticorrosion treatment. Higher durability.
- 3 Aluminum base for higher robustness.
- 4 Light and easy to transport.
- · With lateral stop for repetitive cuts and 45 degree squares.
- · Interchangeable scoring wheels ranging between 0 6mm to
- · Scoring wheel 0 8 mm SILVER included.
- · Direct vision of scoring and cutting line.
- · 72/92 models;
- -Aluminum lateral support.

	Accessories:
Ď o	Ref. 18980 Maintenance Kit















	REF		\triangle							
SPEED-62 N WITH CASE	14985	2/	PRO	24 7/16"	17 5/16x17 5/16"	3/16-9/16"	15 Lb	23.4 Lb	٦	24
SPEED-02 IN WITH CASE	14980	٧	PRU	62 cm	44x44 cm	5-15 mm	7 kg	10.6 kg	2	24
SPEED-72 N WITH CASE	14986	$\sqrt{}$	PRO	28 3/8"	20 1/16x20 1/16"	3/16-9/16"	18.1 Lb	27.6 Lb	7	18
SPEED-72 N WITH CASE	14700	V	PKU	72 cm	51x51 cm	5-15 mm	8.2 kg	12.5 kg	Z	
SPEED-92 N WITH CASE	14987	$\sqrt{}$	PRO	36 1/4"	25 9/16x25 9/16"	3/16-9/16"	24 Lb	35.1 Lb	1	18
SPEED-72 N WITH CASE	14707			92 cm	65x65 cm	5-15 mm	11 kg	15.9 kg	1	10
SPEED-62 N	14975	-	PRO	24 7/16"	17 5/16x17 5/16"	3/16-9/16"	15 Lb	23.4 Lb	7	30
3PEEU-02 N	14973			62 cm	44x44 cm	5-15 mm	7 kg	10.6 kg	Z	30
SPEED-72 N	14976	_	PRO	28 3/8"	20 1/16x20 1/16"	3/16-9/16"	18.1 Lb	27.6 Lb	1	40
3PEEU-72 N	14970		PKU	72 cm	51x51 cm	5-15 mm	8.2 kg	12.5 kg	1	40
בחבבם מז א	14977		nno	36 1/4"	25 9/16x25 9/16"	3/16-9/16"	24 Lb	35.1 Lb	1	20
SPEED-92 N	14977		PRO	92 cm	65x65 cm	5-15 mm	11 kg	15.9 kg	1	28

































FAST

For professional cutting of ceramic tiles.



- Extruded aluminum base.
- 2 New rigid and stable separator.
- Reinforced 18mm guides for greater resilience.
- Four side brackets for a great additional support.
- · Wider foam base.
- · Chromed steel guides with anti-rust treatment.
- · Lateral stop with 45° square.
- · Base for greater support of the tile.
- · Interchangeable scoring wheels from 01/4"(6mm) to 3/8"
- \cdot 01/4" (6mm) SILVER scoring wheel included.
- · Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

	Accessories
Ďo _m	Ref. 18980 Maintenance Kit

















	REF	\triangle								
FAST-85 WITH BAG	13939 P	PRO	33 7/16"	2/	24x24"	1/2"	16.5 Lb	18.7 Lb	ז	32
םאם ווווא כס וכאז		PRU	85 cm	V	60x60 cm	12 mm	7.5 kg	8.5 kg	2	J2
FACT /F	13940	DD0	25 9/16"		17 11/16x17 11/16"	1/2"	13.9 Lb	- Lb		4.0
FAST-65		PRO	65 cm	-	45x45 cm	12 mm	6.3 kg	- kg	4	48
EACT OF	170/1	PRO	33 7/16"		24x24"	1/2"	16.5 Lb	- Lb	٦.	77
FAST-85	13941		85 cm		60x60 cm	12 mm	7.5 kg	- kg	Z	32































STAR PLATINUM

For cutting ceramic tiles.



- Multipoint breaker with aluminium pressure pad and steel breaker bar for greater ROBUSTNESS and breaking POWER.
- 2 Aluminium tool holder, more RIGID and STABLE for EASIER tile scoring.
- 3 Cast aluminium base, LIGHT and STRONG with side extensions for large pieces.
- 4 Cast ALUMINIUM guide supports for greater ROBUSTNESS.
- Dual guide for greater VISIBILITY of the scoring and cutting line.
- · Solid, chromed, ground and calibrated steel guides with anticorrosion treatment.
- \cdot Side stop with millimetre scale and 45° square.
- \cdot Scoring wheels adaptable to each material to obtain the maximum cutting performance and quality in each case.
- · 0 6 mm SILVER scoring wheel included.

	Accessories
bea.	Ref. 18980 Maintenance Kit















	REF		\triangle							Å
STAR-51 PLATINUM WITH CASE	15903	20 1/16"	PRO	2/	14 3/16"	1/2"	8.29 Lb	/	1	
TIRK OIL PLANING WITH CASE	1.770.	51 cm	PRU	٧	36X36 cm	12 mm	3.76 kg	4	1	
CTAD /7 DI ATINUM WITH CACE	15904	24 13/16"	DDO ./	17 11/16"	1/2"	9.68 Lb	,	1	13.32 Lb	
STAR-63 PLATINUM WITH CASE	13904	004 PRO PRO	٧	45X45 cm	12 mm	4.39 kg	4	1	6.04 kg	
CTAD E1 DIATINUA	15001	20 1/16"	1/16"		14 3/16"	1/2"	8.29 Lb	,	1	
STAR-51 PLATINUM	15901	51 cm	PRO		36X36 cm	12 mm	3.76 kg	Ď	1	
CTAD /7 DI ATINUM	15000	24 13/16"	nno		17 11/16"	1/2"	9.68 Lb		1	
STAR-05 PLATINUM	AR-63 PLATINUM 15902 63 cm	PRO		45X45 cm	12 mm	4.39 kg	6	1		
	<u> </u>	03 LIII			43A43 LIII	12 111111	4.37 Kg			

































STAR

Cut & Drill

For professional cutting of ceramic tile and occasional cutting of porcelain tiles.





- Closed sliding mobile breaker for greater bending strength.
- 2 New support reinforced for durability and power separation.
- 3 Chromed steel guides with anti-rust treatment for greater durability.
- Base for correct support of the tile.
- · Interchangeable scoring wheels from 01/4" (6mm) to 3/8"
- \cdot 01/4" (6mm) SILVER scoring wheel included.
- · Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

Accessories
Det 10000













	REF	\triangle												
STAR-42 WITH CASE	14946	PRO	ما	16 9/16"	12x12"	1/2"	7.5 Lb	10.6 Lb		48				
STAR-42 WITH CASE	14740	14/40 PRU	V	42 cm	30x30 cm	12 mm	3.4 kg	4.8 kg	4	40				
STAR-51 WITH CASE	14947 DRN √	14947 PRO	1/0/7 000	0/7 000	2/	20 1/16"	14 3/16x14 3/16"	1/2"	8.2 Lb	12.3 Lb				
STARTOL WITH CASE	14747		V	51 cm	36x36 cm	12 mm	3.7 kg	5.6 kg	4	48				
STAR-63 WITH CASE	1/0/0 000	14040 000	14040 000	1/,0/,0 DDO	14948 PRO	48 PRO	2/	24 13/16"	17 11/16x17 11/16"	1/2"	9.5 Lb	14.3 Lb	4	48
STAR-03 WITH CASE	14740	PKU	V	63 cm	45x45 cm	12 mm	4.3 kg	6.5 kg	4	48				
STAR-42	14943	PRO		16 9/16"	12x12"	1/2"	7.5 Lb	- Lb	6	72				
51AR-42	14743	PKU		42 cm	30x30 cm	12 mm	3.4 kg	- kg	0	12				
STAR-51	1/10/1/1	nnn		20 1/16"	14 3/16x14 3/16"	1/2"	8.2 Lb	- Lb	6	72				
TC ANIC	14744	14944 PRO	PRU	PKU		51 cm	36x36 cm	12 mm	3.7 kg	- kg	U	12		
STAR-63	14945	PRO		24 13/16"	17 11/16×17 11/16"	1/2"	9.5 Lb	- Lb	4	72				
CO-NAIC	14945	PKU		63 cm	45x45 cm	12 mm	4.3 kg	- kg	6	12				

































##

(o)

XX



RUBI

POCKET

Cut & Drill

Light and Functional for use in small working areas. For cutting ceramic tiles, ideal for stoneware and tile.







- With mobile breaker, ideal for diagonal cuts.
- 2 Folding base to optimise space and for easy transportation.
- 3 Aluminium structure compact and lightweight.
- Interchangeable scoring wheels for every material to maximize performance and cutting quality.
- · Chromed steel guides with anti-rust treatment.
- · Interchangeable scoring wheels from 01/4"(6mm) to 3/8" (10mm).
- · 01/4"(6mm) SILVER scoring wheel included.
- \cdot Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

Accessories:



Ref. 18980 Maintenance Kit














	REF	\triangle								
POCKET-40 WITH CASE	12981	PRO	16 9/16"	2/	12x12"	1/2"	6.4 Lb	7.5 Lb	/1	128
PULKLI 40 WIIII LAJL	12701	PRU	42 cm	٧	30x30 cm	12 mm	2.9 kg	3.4 kg	4	120





PRACTIC

Cut & Drill

Ideal for small renovations and light work. For cutting ceramic wall and floor tiles.



- Movable breaker, ideal for diagonal cuts.
- 2 Aluminium guide supports for greater rigidity.
- 3 Lateral end stop for repetitive cuts.
- Interchangeable scoring wheels to adapt to each material.
- · Chromed steel guides and aluminium support.
- · Mobile breaker with 01/4"(6mm) scoring wheel included.
- · Interchangeable scoring wheels 01/4"(6mm) to 3/8"(10mm) for cutting different materials.

	Accessories:
bea.	Ref. 18980 Maintenance Kit















DESIGN DESIGN

	REF	\triangle			Æ,			
PRACTIC-51	24984	PRO	20 1/16"	14 3/16x14 3/16"	3/8"	6.4 Lb	6	72
- Inverte 31	24704	1110	51 cm	36x36 cm	10 mm	2.9 kg		
DDACTIC_£1	7/.NOE	nnn	24 1/16"	16 15/16x16 15/16"	3/8"	10.8 Lb	4	77
PRACTIC-61	24985	5 PRO	61 cm	43x43 cm	10 mm	4.9 kg	0	12

































0



BASIC

Cut & Drill

- · Base, guide & supports in steel and aluminium.
- · Mobile breaker and 09/16"(14mm) SILVER Tungsten Carbide scoring wheel included.
- · Also comes with lateral stop and 45° square.

Accessories



Ref. 18980 Maintenance Kit

Ideal for small renovations and light work. For cutting ceramic wall and floor tiles.

















	REF	\triangle						
BASIC-50	25955	PRO	20 1/16"	14 3/16x14 3/16"	3/8"	5.5 Lb	4	77
חר אוכאם	2,777	PNU	51 cm	36x36 cm	10 mm	2.5 kg	U	12
DACIC (D	25057	nnn	24 1/16"	16 15/16x16 15/16"	3/8"	7.7 Lb	,	77
BASIC-60	25956 P	25956 PRO	61 cm	43x43 cm	10 mm	3.5 kg		72
			01 (111	43X43 CIII	10 111111	א ריר		





XX

SCORING WHEELS

		Ø 6 mm Ø 1/4 inch	Ø 8 mm Ø 5/16 inch	Ø 10 mm Ø 13/32 inch	Ø 18 mm Ø 3/4 inch	Ø 22 mm Ø 7/8 inch
	SIVER	01945	01958	01946	01950	
TS-MAX	GOLD			01949		01964
TR-MAGNET SPEED-MAGNET			01906			
						01907
SPEED-N	SIVER	01945	01958	01946		
FAST POCKET STAR PLATINUM PRACTIC	GOLD			01949		
STAR			01906			
	SIVER		01959	01991	01992	
TZ	GOLD			01993		01965
TX-MAX			01903			
	EXTREME					01900
ΤQ	SIVER					18914
ΤP						01901
CLIM CUTTED	SIVER					18914
SLIM CUTTER						01901
BASIC	SIVER			01960 0 14 mm		

The RUBI® scoring wheels are manufactured using highly resistant, durable Tungsten Carbide. GOLD: Scoring wheel made from Tungsten Carbide with Titanium surface treatment, long-lasting.





##
























0


XX





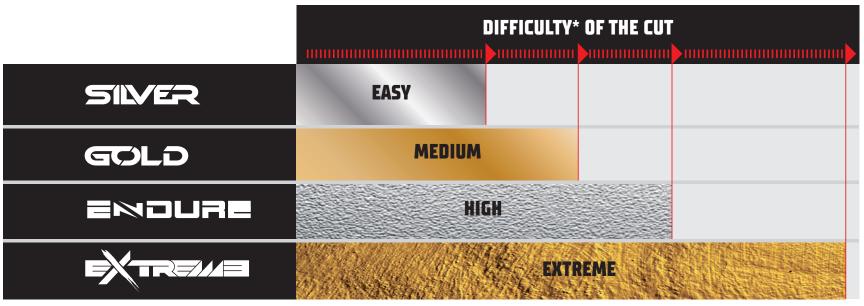

*Difficulty in terms of: Roughness, hardness, height, tensions, finishing.

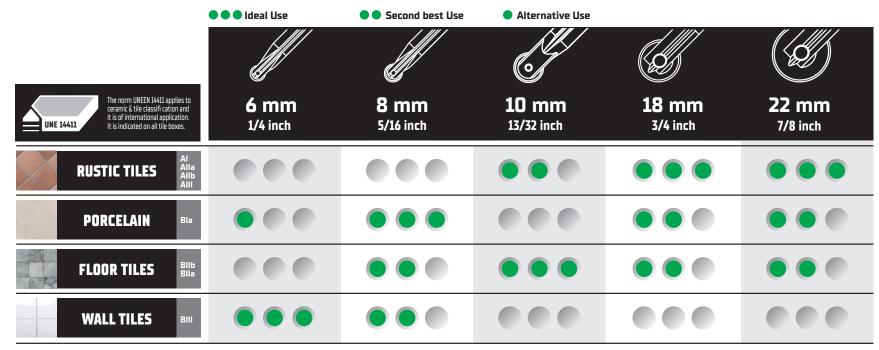

The RUBI® scoring wheels are manufactured using highly resistant, durable Tungsten Carbide. GDLD: Scoring wheel made from Tungsten Carbide with Titanium surface treatment, longlasting.

TS-MAX, TR-MAGNET & **SPEED-MAGNET SCORING** WHEELS

 For TS-MAX, TR-MAGNET and SPEED-MAGNET cutters.

6MM SILVER SCORING WHEEL [01/4"]







- · Tungsten carbide scoring wheel of high resistance and
- · Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
SCORING WHEEL 01/4" (6MM)	N1945	DDU	10	4600
SILVER	01743	PKU	10	4000

8MM SILVER SCORING WHEEL [05/16"]



#

 \odot

t

XX



- · For wall tiles, floor tiles and porcelain tiles.
- · Tungsten carbide scoring wheel of high resistance and
- · Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

-		التستا
B PRO	10	4600
	3 PRO	B PRO 10

8MM ENDURE SCORING WHEEL (05/16")



- PATENTED
- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of tungsten carbide.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF	\triangle	
SCORING WHEEL 05/16" (8MM) ENDURE	01906	SUPERPRO	5

10MM SILVER SCORING WHEEL [03/8"]



- · For Floor tiles.
- · Tungsten carbide scoring wheel of high resistance and
- · Handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
SCORING WHEEL 03/8" (10MM) SILVER	01946	PRO	10	4600

10MM GOLD SCORING WHEEL [03/8"]



PATENTED

- · For Floor tiles.
- · Tungsten carbide scoring wheel with a superficial titanium
- · Handle made with new high technology RUBI® alloy; maximum precision and resistant to wear. Long-lasting.

	REF	\triangle		
SCORING WHEEL 03/8" (10MM)	N1949	SUPERPRO	10	4600
GOLD	01/4/	201 EINI INO	10	1300



- · For rough and difficult to cut ceramic tiles.
- Tungsten carbide scoring wheel of high resistance and durability.
- Patented shaft geometry; maximum precision and minimum vibration.

	REF	\triangle		
SCORING WHEEL 03/4" (18MM)	N195N	PRN	10	7/00
SILVER	01750	PKU	10	3600

22MM SCORING WHEEL (07/8") EXTREME



- · For sharp cutting in hard tiles with rough or structured
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- Patented geometry shaft, for maximum precision and minimum vibration.
- · Patented model for maximum precision and minimum vibration.
- · Extra-long life.

	REF	\triangle	
SCORING WHEEL 07/8"(22MM) EXTREME	01907	PREMIUM	5

6MM SILVER SCORING WHEEL SET (01/4")





- Tungsten carbide scoring wheel of high resistance and durability.
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.
- Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
2 SCORING WHEEL 01/4" (6MM)	N1947	PRN	10	3600
SET SILVER	U1747	PKU	10	3000

6MM (01/4") & 10MM (03/8") SCORING WHEELS SET



- · Tungsten carbide scoring wheel of high resistance and durability.
- · Shaft made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
01/4" (6MM) & 03/8" (10MM) SCORING WHEELS SET	01948	PRO	10	3600

TX-MAX & TZ SCORING WHEELS

 PLUS scoring wheels for TX-MAX & TZ professional cutters.

8MM PLUS SILVER SCORING WHEEL (05/16")



- · For wall tiles, floor tiles and porcelain tiles.
- · Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF	\triangle		
8MM PLUS SILVER SCORING WHEEL (05/16")	01959	PRO	10	3600

(

XX

8MM PLUS SCORING WHEEL (05/16") ENDURE



PATENTED



- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of tungsten carbide.
- · Patented geometry shaft, for maximum precision and minimum vibration.

18MM PLUS SILVER SCORING

· Extra-long life.

WHEEL [03/4"]

	REF	\triangle	
8MM PLUS SCORING WHEEL (05/16") ENDURE	01903	SUPERPRO	5

10MM PLUS SILVER SCORING WHEEL [03/8"]



PATENTED

PATENTED



- · For floor tiles.
- · Tungsten carbide scoring wheel of high resistance and
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF	\triangle		
10MM PLUS SILVER SCORING WHEEL (03/8")	01991	PRO	10	3600

10MM PLUS GOLD SCORING WHEEL (013/32")









##















- · For rough and difficult to cut tiles.
- · Tungsten carbide scoring wheel of high resistance and
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF	\triangle		
18MM PLUS SILVER SCORING WHEEL (03/4")	01992	PRO	10	3600

22MM SCORING WHEEL PLUS

EXTREME(0 7/8")



- · For sharp cuttings in hard ceramic and porcelain tiles.
- · Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- · Extra-long life.

	REF	\triangle		
22MM SCORING WHEEL PLUS EXTREME (0 7/8")	01900	PREMIUM	5	-



precision and minimum vibration.

· For floor tiles.

10MM PLUS GOLD SCORING 01993 SUPERPRO WHEEL [013/32"]

· Tungsten carbide scoring wheel with a superficial titanium

· Shaft made with a patented geometry for a maximum





































TP & TQ SCORING **WHEELS**

 Adaptable scoring wheel for TP & TQ professional cutters.

SCORING WHEEL

Sets of scoring wheels of

different diameters with

SETS

box.

22MM SILVER SCORING WHEEL [07/8"] TP/TQ











- · For sharp cuttings in hard ceramic and porcelain tiles.
- · Tungsten Carbide scoring wheel with a superficial Titanium
- · Mounted on bearing. Enhanced smooth user preception.
- · Extra-long life.

	REF	\triangle	
22MM SCORING WHEEL PLUS EXTREME (Ø 7/8") TP/TO	01901	PREMIUM	5

- Exclusive for TP/TO cutters. Suitable for smooth and even surfaces and slightly rough surfaces.
- · Scoring wheel guide made for Tungsten Carbide.

	REF	\triangle	
22MM SCORING WHEEL (07/8") SILVER TP/TQ	18914	PRO	10

SCORING WHEEL SET 1





- · For TS-MAX, TR-MAGNET, TF-MAX, SPEED-MAGNET, SPEED-N, FAST, STAR-MAX, STAR, POCKET & PRACTIC ranges, includes 1 01/4" (6mm) SILVER scoring wheels and 1 03/8" (10mm) SILVER scoring wheel.
- · In plastic box with transparent cover.
- · Supplied in blister.

	REF	\triangle		
SCORING WHEEL SET 1	01995	PRO	5	450

SCORING WHEEL SET 2





- · For TS-MAX, TR-MAGNET, TF-MAX & SPEED-MAGNET models, includes 1 scoring wheel of 01/4" (6mm),
- · 05/16" [8mm], 03/8" [10mm], 07/8" [18mm] [2 units] SILVER.
- · In plastic box with transparent cover.
- · Supplied in blister.

	REF	\triangle		
SCORING WHEEL SET 2	01996	PRO	5	450



SCORING WHEELS FOR **STANDARD MANUAL TILE CUTTERS**

 Selection of scoring wheels for SPEED-N, FAST, STAR-MAX, STAR, POCKET, RAPID & **PRACTIC** manual cutters.

6MM SILVER SCORING WHEEL [01/4"]





- · For wall tiles.
- · Wheel made from tungsten carbide of high resistance and
- · Patented model with new high technology RUBI® alloy, maximum precision and resistant to wear.

	REF	\triangle		
6MM SCORING WHEEL (01/4")	N1945	PRN	10	4400
SILVER	01945	PRU	10	4600

8MM SILVER SCORING WHEEL [05/16"]

· For wall tiles, floor tiles and porcelain tiles.

maximum precision and resistant to wear.

8MM SCORING WHEEL (05/16")

· Wheel made from tungsten carbide of high resistance and

01958

· Patented model with new high technology RUBI® alloy,







#









XX











- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of tungsten carbide.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF	\triangle	
8MM SCORING WHEEL (05/16") ENDURE	01906	SUPERPRO	5

10MM SILVER SCORING WHEEL (03/8")





- · For floor tiles.
- · Wheel made in tungsten carbide of high resistance and duration.
- · Shaft made with new high technology RUBI® alloy, maximum precision and minimum vibration.

	REF	\triangle		
10MM SCORING WHEEL (03/8") SILVER	01946	PRO	10	4600

6MM SILVER SCORING WHEEL



· Tungsten Carbide scoring wheel of high resistance and duration

	REF	\triangle		
6MM SCORING WHEEL SET (0 1/4") SILVER	01947	PRO	10	3600



- · Tungsten Carbide scoring wheel of high resistance and
- · Handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
6MM (01/4") & 10MM (03/8")	N1948	PRN	10	7/00
SILVER SCORING WHEELS SET	01948	PKU	10	3600

14MM SILVER SCORING WHEEL [09/16"]





- · For BASIC. KIT and TEN-BRIC tile cutters.
- · Wheel made of Tungsten Carbide.

	REF	\triangle		
14MM SILVER SCORING WHEEL (09/16")	01960	PRO	10	4600

STAR & STAR MAX LATERAL STOP





MAINTENANCE KIT





· Lateral stops for manual cutters.

ACCESSORIES

FOR MANUAL

TILE CUTTERS

· Lateral stop for repetitive cuts with cuts 45 (millimetre increments).

·			
	REF	\triangle	
STAR, STAR-N, STAR-N PLUS & STAR MAX LATERAL STOP	12923	PRO	1

· Cleaning, lubricating & maintenance oil suitable for regular maintaining of cutter parts that are regularly used; guides, sliding system, tilted axes, spiral, metallic surfaces.

	REF	\triangle		
MAINTENANCE KIT	18980	SUPERPRO	8	640



(o)

<u>t</u>

XX

NIPPERS

· Wide range of pliers for cutting ceramics, porcelain & glass.

NIPPERS FOR PORCELAIN TILES





· Specially for cutting narrow strips of a maximum of 7/16" [1 cm). Equipped with tungsten carbide GOLD scoring wheels with titanium surface treatment for longer useful life. By means of a gentle turn, the wheels can be repositioned when their vertex starts getting worn. If totally worn, they can be replaced using their corresponding spare piece, Ø 3/4" (18 mm) GOLD spare scoring wheel long-life (Ref.01953).

	REF	\triangle		
NIPPERS FOR PORCELAIN	83942	SUPERPRO	5	765

TILER NIPPERS




#

t

XX





- · Tungsten Carbide Pliers.
- · Ideal for rectification of holes in ceramics.
- · Bi-material handle Ergonomic.

	REF	\triangle		
PARROT NIPPER - CARBIDE	65925	SUPERPRO	5	765

NIPPERS FOR CERAMIC TILES





- · Tungsten Carbide Edge.
- · Ideal for the rectification of straight cut on ceramics.
- · Bi-material handle Ergonomic.

	REF	\triangle	
NIPPERS FOR CERAMIC TILES	65926	SUPERPRO	6

NIPPERS FOR GLASS MOSAIC



- · Tungsten Carbide Edge.
- · Ideal for the rectification of glass mosaic tiles.
- · Ri-material handle Frennomic

	REF	\triangle	
NIPPERS FOR MOSAIC	71970	SUPERPRO	5

CELLULAR CONCRETE SAW





- · Saw with 29 Tungsten Carbide teeth.
- · Length: 29" (75cm).
- · Beechwood and varnished handle.

	REF	\triangle	
CELLULAR CONCRETE SAW	70930	SUPERPRO	2



SLAB SYSTEM CUTTING AND HANDLING LARGE-SIZED TILE

Cutting large tile Handling large tile Installing large tile









SLAB— SYSTEM

CUTTING

SLAB CUTTER
SLIM CUTTER PLUS
TC-125

HANDLING

SLAB TRANS HEAVY DUTY N
SLIM EASY TRANS PLUS
SLIM EASY TRANS
SLAB TROLLEY
SLAB TABLE

INSTALLATION

RUBI TRILLER

LARGE FORMAT INFORMATION

Densidad del material: 2,45 g/m³



 $300 \times 100 \times 0,3 \text{ cm} = 22 \text{ kg}$ $118^{1/8"} \times 39^{3/8"} \times ^{1/8"} = 48.5 \text{ Lb}$

 $300 \times 100 \times 0.7 \text{ cm} = 51.5 \text{ kg}$ $118^{1/8} \times 39^{3/8} \times 1/4 = 113.5 \text{ Lb}$

 $160 \times 320 \times 0.6 \text{ cm} = 75,25 \text{ kg}$ $63\text{``} \times 126\text{'`} \times 1/4\text{''} = 165.9 \text{ Lb}$

 $160 \times 320 \times 0.8 \text{ cm} = 100,35 \text{ kg}$ $63\text{``} \times 126\text{'`} \times \frac{5}{16\text{'`}} = 221.2 \text{ Lb}$

 $120 \times 240 \times 0.9 \text{ cm} = 63.5 \text{ kg}$ $47^{1/4} \times 94^{1/2} \times 3/8 = 139.9 \text{ Lb}$

 $150 \times 300 \times 0.3 \text{ cm} = 33 \text{ kg}$ $59^{1/16^{\circ}} \times 118^{1/8^{\circ}} \times 1^{1/8^{\circ}} = 72.75 \text{ Lb}$

 $150 \times 300 \times 0.6 \text{ cm} = 66 \text{ kg}$ $59^{1/16"} \times 118^{1/8"} \times ^{1/4"} = 145.5 \text{ Lb}$





























SLAB CUTTER

Cut & Drill

For manual cutting of large porcelain tiles.



- System with movable suction cups integrated in the guides. Special grey rubber suction cups for rough surfaces that won't leave marks on the tile.
- Carriage with lever mechanism for perfect scoring. Extreme roller guide.
- Highly reinforced guides. Easily interconnected by means of an adjustable lever mechanism.
- 4 Cutting capacity of 320 cm, extendable according to need with additional guides.
- Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking. 2-in-1 nippers and breaker.
- 0 22 mm RUBI EXTREME roller guide made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- Each set contains: Three 112 cm guides, 1 marker carriage with 22 mm roller guide, 1 set of nippers and 6 suction cups.
- Transport bag with padded handles and pockets for accessories.

Accessories:



Ref. 18917 Slab Breaker Plus



















	REF	\triangle							
SLAB CUTTER	16900	PREMIUM	2	126"	1/8-3/8"	35.7 Lb	24 Lb	1	
DLAB LUTTER	10700	FKLIMIUM	٧	320 cm	3-10 mm	16.2 kg	11 kg	1	



(o)


<u>t</u>

XX



SLIM CUTTER PLUS

and 10 mm.



















	REF	\triangle						
SLIM CUTTER PLUS	18959	SUPERPRO	√	141 3/4"	3/8"	15 Lb	1	25
				360 cm	10 mm	7 kg		

The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 10 mm to 15 mm.

- 110 cm long extruded aluminium guides which can be connected together.
- 2 360 cm cutting capacity (extendable according to need by adding extra guides, Ref.18913).
- 3 natural rubber suction cups suitable for smooth and rough surfaces for better fixing of the guides to the tile.
- Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking. 2-in-1 nippers and breaker.
- · Recommended thicknesses between 3 and 10 mm.
- · More ergonomic scoring carriage with a score increase of 30 %.
- · 0 22mm RUBI EXTREME scoring wheel made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- · Includes practical transport bag manufactured in reinforced nylon with handles and shoulder strap. Includes 4 interior compartments for accessories.
- Each set contains: Four 110 cm guides. 1 scoring carriage with 22 mm Extreme scoring wheel, 1 set of nippers, 3 suction cups and 1 Allen key.

	Accessories:
	Circular saw TC-125
*	Ref. 18917 Slab Breaker Plus
	Ref. 18913 Slim System Cutter Guide 110cm.































- · Auxiliary breaker for the cut of slim porcelain slabs or large tiles.
- · To separate thicknesses of 6 mm or more.
- · Soft-grip handle for a better comfort and ergonomic.
- · With width adjustment system, to achieve an equal, uniform and symmetric distribution of breaking forces when cutting narrow strips.
- · Rubber pressure pad for greater control and more precise separation.

		_				
				REF	\triangle	
SLAB BREA	KER PLUS			18917	PREMIUM	1

CUTTING

 \odot

XX







· Aluminium guide- 110cm.

	REF	\triangle		
SLIM SYSTEM CUTTER GUIDE	18913	SUPERPRO	3.7 Lb	1
110CM.	10713	JUPERPRU	1.7 kg	1

SLAB BREAKER NIPPERS





- · RUBI® SLAB BREAKER NIPPERS are nippers/breaker for large porcelain tiles of between 3 and 10 mm thick.
- · Nippers with bi-material soft-grip handle with clip to keep the nippers closed.
- · High breaking power for tiles from 3 to 10 mm thick.
- · Reinforced nippers designed for greater comfort and durability.
- \cdot Can be used as nippers for thinner tiles and as a breaker if the thickness or hardness of the material requires it. 2-in-1 nippers and breaker.

	REF	\triangle	
SLAB BREAKER PLIERS	54918	SUPERPRO	1



22MM SCORING WHEEL PLUS EXTREME (0 7/8") SLIM CUTTER



- · For sharp cuttings in hard tiles with rough or structured surfaces.
- Tungsten Carbide scoring wheel with a superficial Titanium treatment
- · Mounted on bearing. Enhanced smooth user preception.
- · Extra-long life.

	REF	\triangle	
22MM SCORING WHEEL PLUS EXTREME (0 7/8") SLIM CUTTER	01901	PREMIUM	5



CIRCULAR SAW TC-125





- \cdot Switch with safety lock. Prevents unintentional start-up. Electrical cable with RCD.
- · Bi-material additional grip. Principally for mitre cuts.
- · Compatible with diamond discs of 125 or 115 mm diameter. (Suitable for discs with reinforcement plate, TVA type).
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. Facilitates disc change and minimises the projection of particles and water.
- \cdot Includes TCR–125 SUPERPRO disc (dry cutting), transport case and accessories. facilitates transport and handling.

	REF	\triangle		RPM	5		⇌	Ø	\varnothing	<u> </u>						
TC-125	5005Z	SUPERPRO	٦/	/ 13800	220-240V	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 15/16x94 1/8x81 1/8"	31 Lb	1				
16 123	עניוונ	JUPERPRU	٧	טטטכנ	50-60Hz	20-25 mm	14-18 mm	115-125 mm	22.2 mm	330x239x206 cm	14 kg	1				
TC-125	51957	CHDEDDDO	٠	17000	110-130V	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 15/16x94 1/8x81 1/8"	31 Lb	1				
USA	2142/	SUPERPRU	SUPERPRO	SUPERPRU	JUPERPRU	JUPERPRU	٧	13800	50-60Hz	20-25 mm	14-18 mm	115-125 mm	22.2 mm	330x239x206 cm	14 kg	1
TC-125	51959	SUPERPRO	٠	13800	220-240V	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 15/16x94 1/8x81 1/8"	31 Lb	1				
UK	21424	SUPERPRU	٧	12800	50-60Hz	20-25 mm	14-18 mm	115-125 mm	22.2 mm	330x239x206 cm	14 kg	1				
TC-125	51961	SUPERPRO	٠	13800	110-130V	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 15/16x94 1/8x81 1/8"	31 Lb	1				
UK	21401	SUPERPRU	٧	12800	50-60Hz	20-25 mm	14-18 mm	115-125 mm	22.2 mm	330x239x206 cm	14 kg	1				
UK					3U-0UHZ	20-25 111111	14-18 111111	112-172 111111	22.2 111111	33UXZ37XZU0 LIII	14 Kg					

XX



TC-125 CIRCULAR CUTTER KIT

Cut & Drill

For cutting all types of ceramic and porcelain sheets. Suitable for use with natural and sintered stone. Especially suitable for large tiles.



	REF			5	RPM	W			➾	Ø	Ø				
TC-125 CIRCULAR CUT	TER KIT	230V 50⁄60HZ	(PREVII	OUS REF. 5190	1 = NEW RE	F. 50953 +	51979]								
TC-125 230V 50/60HZ CUTTER	50953	SUPERPRO	√	220-240V 50-60Hz	13800	1250 W	126" 320 cm	13/16-1" 20-25 mm	9/16-11/16" 14-18 mm	4 1/2-5" 115-125 mm	7/8" 22.2 mm	129 15/16x94 1/8x81 1/8" 330x239x206 cm	31 Lb 14 kg	1	-
KIT TC-125 GUIDES, SUCTION CUP	51979	SUPERPRO	\checkmark											1	-
TC-125 CIRCULAR CUT	TER KIT	230V 50⁄60HZ	(PREVI	DUS REF. 5190	2 = NEW RE	EF. 51959 +	51979]								
TC-125 230V 50/60HZ UK CUTTER	51959	SUPERPRO	\checkmark	220-240V 50-60Hz	13800	1250 W	126" 320 cm		9/16-11/16" 14-18 mm	4 1/2-5" 115-125 mm	7/8" 22.2 mm	129 15/16x94 1/8x81 1/8" 330x239x206 cm	31 Lb 14 kg	1	-
KIT TC-125 GUIDES, SUCTION CUP	51979	SUPERPRO	V											1	-
TC-125 CIRCULAR CUT	TER KIT	230V 50/60HZ	(PREVII	OUS REF. 5190	1 = NEW RE	F. 51961 +	51979)								
TC-125 110V 50/60HZ UK CUTTER	51961	SUPERPRO	√	110-130V 50-60Hz	13800	1250 W	126" 320 cm		9/16-11/16" 14-18 mm	4 1/2-5" 115-125 mm	7/8" 22.2 mm	129 15/16x94 1/8x81 1/8" 330x239x206 cm	31 Lb 14 kg	1	-
KIT TC-125 GUIDES, SUCTION CUP	51979	SUPERPRO	\checkmark											1	-
TC-125 CIRCULAR CUT	TER KIT	230V 50⁄60HZ	(PREVII	DUS REF. 5190	1 = NEW RE	F. 51957 +	51969]								
TC-125 120V 50/60HZ USA CUTTER	51957	SUPERPRO	\checkmark	110-130V 50-60Hz	13800	1250 W	126" 320 cm		9/16-11/16" 14-18 mm	4 1/2-5" 115-125 mm	7/8" 22.2 mm	129 15/16x94 1/8x81 1/8" 330x239x206 cm	31 Lb 14 kg	1	18
KIT TC-125 GUIDES, SUCTION CUP	51969	SUPERPRO	√											1	-

- Equipped with a carbon steel slide on adjustable stainless steel radial bearings.
- 2 Double dust reduction/control system. Dry and wet cutting.
- Height-adjustable cutting head (saw effect), hinged from 0° to 45°. (mitre). FAST adjustment system.
- 4 More ergonomic. Additional BI-MATERIAL handle, mainly for mitre cuts.
- Compatible with discs of 125 or 115 mm diameter. (Suitable for discs with reinforcement plate, TVA type).
- Switch with safety lock. Prevents unintentional start-up. Electrical cable with PRCD.
- Direct connection to AS-30 PRO (32 mm diameter) vacuum cleaner. Includes adapter for other models and brands (37, 42 and 50 mm diameter).
- Quick connection and regulating valve for hose** (16 mm diameter). Rubber stopper for suction outlet. Improves ergonomics during wet cutting.
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. Facilitates disc change and minimises the projection of particles and water.
- Tilting side guard for mitre cuts. reduces water splashing and improves dust suction.
- Includes TCR-125 SUPERPRO disc (dry cutting), transport case and accessories. Facilitates transport and handling.

Accessories



Ref. 18913 Slim System Cutter Guide 110cm.



djustable stainless steel radial bearings.















XX











SLAB TRANS HEAVY DUTY N

Especially suited for handling thicker pieces.





- Reinforced aluminium profile joined by a system of sliders. Greater structural strength.
- 2 Includes 2 perpendicular aluminium guides, for greater stiffness.
- Equipped with four retractable and removable Soft-Grip handles to adapt to every situation during installation. Six light colored vacuum suction cups that does not leave marks on the tile. Increased load capacity.
- 4 Fast and easy to assemble and disassemble. Easy fix system.
- · Black anodized finish.
- · Each guide can be used independently.
- · Maximum load capacity: 170 kg.
- · Dimensions: 3800x1700x237 mm. (assembled and deployed).
- · Maximum handling size: 360 x 160 cm.
- · Unitary box with RUBI's flexography and full-colour label.

Accessories



Ref. 18979

Vacuum suction pad SLAB TRANS HEAVY DUTY N









Additional vacuum suction cups available can be attached to the system but it does not increase the maximum load capacity of 170 kg.

































 \odot



SLIM EASY TRANS SUPPLEMENTARY GUIDE SET / SLIM EASY TRANS PLUS



- · Slim Easy Trans has a set of perpendicular guides for increased stability.
- · With the supplementary guide set we increase the maximum load capacity to 120kg.
- · Increases the rigidity of the unit.
- · Facilitates handling of the pieces.
- · Fast and easy to assemble and disassemble.
- · Black anodized finish.

	REF	\triangle	
SLIM EASY TRANS / SLIM EASY TRANS PLUS	18819	SUPERPRO	1
SUPPLEMENTARY GUIDE SET	10019	SUPERPRU	1

SLIM EASY TRANS PLUS





- · Includes 2 retractable and adjustable guides of 170 to 320 cm of reinforced aluminium and six 20 cm suction cups (ref. 18827) with high load capacity. Provide added safety and reliability.
- The optimal recommended gripping distance is 700 mm (distance between handles).
- · The soft-grip handles can slide and be removed through the top slot of the guides.
- · Multiple position settings for the suction cups.
- · Each guide can be worked with individually.
- · Maximum load capacity: 80 kg.
- · For pieces up to 3.2 m.

	REF	\triangle				
SLIM FASY TRANS PLUS	18976	SUPERPRO	651 3/16x100x89 3/4"	53 Lb	1	1
JLIM CAST TRANS PLUS	107/0	JUPERPRU	1654x254x228 cm	24 kg	1	1

SLIM EASY TRANS







- · This system can be used as a complement to the Slim cutter (Ref. 18911).
- · Includes two retracting guides adjustable from 160 to 320 cm and 10 suction cups for securing rough and smooth surfaces (Ref.66929).
- · Maximum load of the unit: 60 kg.
- · For pieces up to 3 m.
- · Accessory: Ref. 18819.

	REF	\triangle			
SLIM EASY TRANS	18910	SUPERPRO	36.6 Lb 16.6 kg	1	12

VACUUM SUCTION PAD SLAB TRANS HEAVY DUTY N






NEW

• The suction cup addition is an accessory compatible only with SLAB TRANS HEAVY DUTY N (Ref. 18982) transporter. The suction cup can be fixed to any type of surface without leaving a mark on the part. Its use allows the suction cups to be replaced while maintaining the original maximum load capacity of the transporter at all times.

	REF	\triangle		
VACUUM SUCTION PAD SLAB TRANS	18979	PREMIUM	1	1
HEAVY DUTY N				

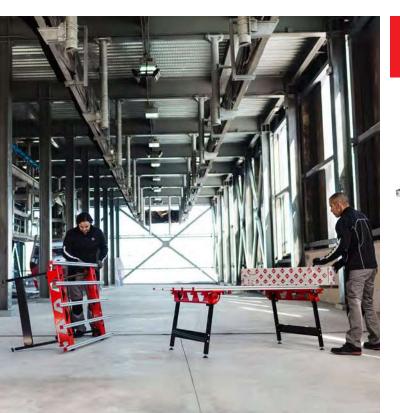

SLAB TROLLEY





- · Transport system and manoeuvre for large format tiles.
- · Especially suitable for thicker/heavier slabs.
- Exclusive to the Slab trans HD (Ref.18936) and Slim easy trans systems (Ref.18910+18819).
- · Easy and quick to assemble and disassemble. Easy fix connection system.
- · Ultra light and compact.
- Extendable support arm for greater ergonomics when loading and unloading pieces on the workbench.
- · Maximum load capacity: 140 kg (including material and trans system).

	REF	\triangle	*		
SLAB TROLLEY	18934	PREMIUM	33 Lb	1	5
	10751	T IXEPHION	15 kg	-	

SLAB TABLE



- Workbench to support the cutting and preparation of large formal materials using the tools of the Slab system range.
- \cdot Extra-reinforced bars thus increasing the rigidity of the workbench.
- \cdot The structure of the table together with the levelling feet achieves a greater stability of the set.
- · Assembly and disassembly fast and easy. Easy fix connection system (hammerhead screws).
- · Folding legs. Equipped with security system against involuntary closing.
- · Dimensions in working position: 1800x1044x700 mm.
- · Dimensions in transport position: 1800x1044x198 mm.
- · Working height: 70 cm.
- · Maximum load capacity: 250 kg.

	REF	\triangle			*		
SI AR TARI F	18935	PRFMIIIM	70 7/8x41 1/8x27 9/16"	76.1 Lb	79 Lb	1	0
SLAD IADLE	10733	PREMIUM	180x104.4x70 cm	34.5 kg	36 kg	1	7































 \odot

XX

INSTALLATION

RM ROUGH SURFACE DOUBLE SUCTION CUP





- Double suction cup for handling ceramic tiles with rough and/or slightly structured surfaces.
- Injected polycarbonate body. Very light. Metal reinforcement in the lever base for greater tensile strength. Body made of highly resistant aluminium. rubber. Maximum load capacity: 55 kg.
- · Suction cup diameter: 120 mm.

	REF	\triangle		
RM ROUGH SURFACE DOUBLE	//053	SUPERPRO	1	0/
SUCTION CUP	00952	SUPERPRU	1	96

TILE GAP CLOSER





- · For a precise and easy adjustment of the gap between tiles during floor or wall tiling.
- Large diameter suction cups (150 mm) for any kind of tile surface (flat, rough, structured, etc.)
- · For lateral displacement of tiles and gap reduction between 0 40 mm.
- Enables to equal the level of the tiles between 0 20 mm.
- · Maximum lifting capacity up to 100 Kg (220 lbs).

	REF	\triangle			*	
TILE GAP	60926	PRO	18 7/8"	7.96 Lb	8.47 Lb	1
CLOSER	00720	PRU	48X15X12 cm	3.61 kg	3.84 kg	1

SUCTION CUP WITH VACUUM PUMP



- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 110kg.

	REF	\triangle		
SUCTION CUP WITH VACUUM PUMP 0200	18919	PREMIUM	1	90

RM ROUGH SURFACE SUCTION CUPS





- Suction cups for handling tiles with rough and/or slightly structured surfaces.
- · Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle, for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 25 kg.
- · Suction cup diameter: 120 mm.

	REF	\triangle		
RM ROUGH SURFACE SUCTION	66979	SUPERPRO	1	280
CUPS	00727	JUPEKPKU	1	200

TILE BEATING BLOCK





- · For a good settlement of tiles.
- · Waterproof and high wear resistance wood.
- · Perfect flatness.
- · Dimensions: 15 3/4" x 5 3/4" (40x14,5 cm).
- \cdot With white natural rubber sheet to prevent damage to the tile.

	REF	\triangle	
TILE BEATING BLOCK 40 X 14,5 CM. WITH	72980	SUPERPRO	1
RUBBER	72980	SUPERPRU	1



RUBI TRILLER

0.04 cv/hp


3 Set

Compact manual vibrator.
Especially designed for vibrating large format tiles.



- Compact manual vibrator especially designed for vibrating large format tiles
- Expels the air trapped under the tile and maximises the adhesive coverage. (Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
- · Suitable for use on floor and wall tiles.
- Compact and light design weighing just 4.8 kg to facilitate work on walls.
- Floating carbon steel chassis with vibration reduction system for greater user comfort.
- · Easy to change, non-marking contact plate.
- · Easy to operate tool with ergonomic double grip.
- · Non-adjustable vibration frequency.
- · Folded 1.5 mm steel sheet chassis, powder painted in red.
- Vibration plate made of PUR plastic, non-marking and easy to change.





































ELECTRIC TILE CUTTING

Electric cutters and mitre saws Circular saw and vacuum cleaner







SELECTION TABLE































10"

8"






	DC-PYTHON	120,5	48"	חבת
WITH PLUNGE EFFECT	DCX-XPERT	155	61"	230
WITHOUT PLUNGE EFFECT	DV	106	41 3/4"	200





DU-EVO	85	33"		
ND	0	0	200	8"



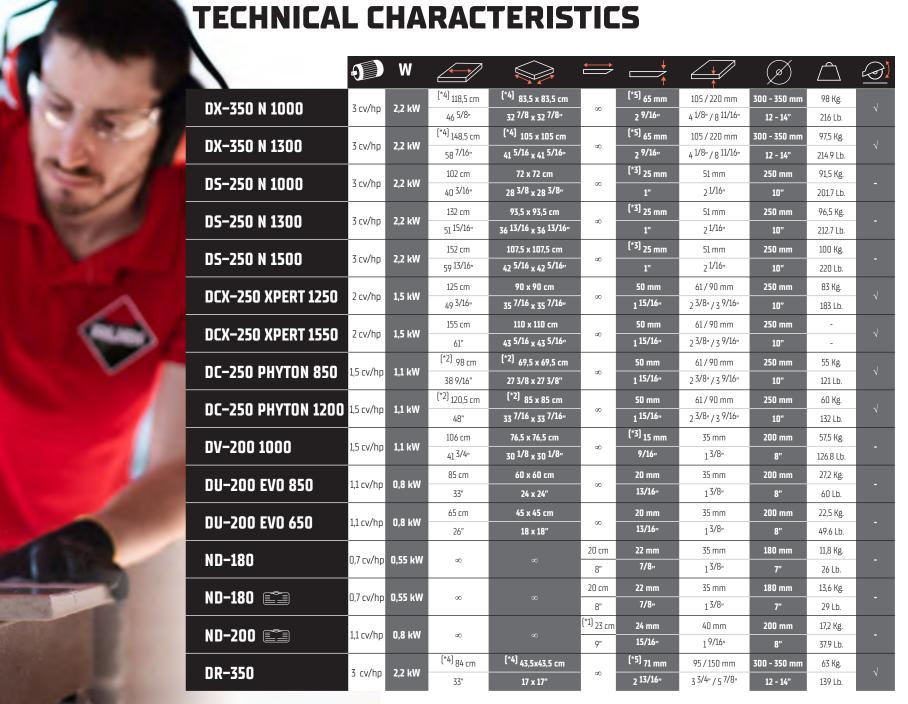

^(*1) With lateral stop.

##

 \odot

Ġ

XX

^{(*2) 13/32&}quot; (10mm) thick material and plunge effect.

^(*3) With special decks for mitering. (*4) With 012" (300mm) blade, 13/32" (10mm) thick material and plunge effect.

^(*5) With 014" (350mm) blade.

^(*6) Saw head in the lowest position



DX-350 N

For all types of ceramic, porcelain tiles and building materials such as marble, granite, facade and fireproof bricks.



























	\triangle				➾	x1/x2	\varnothing	Ø				
DX-350 N 1000	DDEWIIIM	40 3/8"	46 5/8"	32 7/8x32 7/8"	2 9/16"	4 1/8 / 8 11/16"	1"	12-14"	66 15/16x33 7/8x56 5/16" 170x86x143 cm	216 Lb	1	**1
	PREMIUM	102.5 cm	118.5 cm	83.5x83.5 cm	65 mm	105 / 220 mm	25.4 mm	300-350 mm	170x86x143 cm	98 kg	1	1
DV 750 N 1700	DDEMILIM	52 3/16"	58 7/16"	41 5/16x41 5/16"	2 9/16"	4 1/8 / 8 11/16"	1"	12-14"	78x33 7/8x56 5/16" 200x86x143 cm	214.9 Lb	1	**1
DX-350 N 1300	PREMIUM	132.5 cm	148.5 cm	105x105 cm	65 mm	105 / 220 mm	25.4 mm	300-350 mm	200x86x143 cm	97.5 kg	1	1

Cutting capabilities may vary depending on the head position, special plates and disc diameter. Ref. 52919 (3F): 4 CV/HP.

- Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- 2 Equipped with ZERO DUST system. Tested and certified by TNO.
- 3 Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- 4 High performance plunge effect. Maximum cutting height.
- · Equipped with protective safety system for segmented blades.
- · With thermal security switch.
- · Water pump refrigeration of blade with flow control valve.
- · Diamond blade 0 14" (350 mm) not included.
- · Allows the use of a 0 12" (300 mm) blade.
- · Adjustable mobile head with plunge effect capability.
- · Retractable legs with "shield" function and wheels for easy transportation.
- · Motor on top and belt transmission.
- · With lateral stop for repetitive cuts.
- · Aluminium working surface removable for easy cleaning.
- · Removable water tank system.
- · 2mW line laser.
- · Circular level for easy field installation.
- · Machine supplied without cable.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

		Accesso	ries			
-	***	Ref. 51916 Tile Fixer [OV/DC/DCX/I	DS/DX		
	>	Ref. 51915 Set of flan	ges 0184mr	n DX-350		
<		Ref. Cables wit	h plug			
	REF	52905	52906			
DX-350 N 1000	Voltage	230V-50 Hz. 2	220V-60 Hz.			
1000	RPM	2800	3400			
	REF	52915	52916	52917	52918	52919

Voltage 230V-50 Hz. 230V-60 Hz. 120V-50 Hz.



曲

(o)

<u>t</u>

XX



380V/50



DS-250 N

For wall tiles, floor tiles, porcelain tiles, marble, granite and other materials.









DS-250 N 1000 DS-250 N 1300 DS-250 N 1500





















\triangle				ightharpoons	\varnothing	\varnothing			*		
PREMIUM	40 3/16"	28 3/8x28 3/8"	2 1/16"	1"	1"	10"	66 15/16x33 7/8x50"	201.7 Lb	243 Lb	1	**1
PKLIMIUM	102 cm	72x72 cm	51 mm	25 mm	25.4 mm	250 mm	170x86x127 cm	91.5 kg	110 kg	1	1
DDEMILIM	51 15/16"	36 13/16x36 13/16"	2 1/16"	1"	1"	10"	78x33 7/8x50"	212.7 Lb	265 Lb	1	**1
PREMIUM	132 cm	93.5x93.5 cm	51 mm	25 mm	25.4 mm	250 mm	200x86x127 cm	96.5 kg	120 kg	1	1
DDEMILIM	59 13/16"	42 5/16x42 5/16"	2 1/16"	1"	1"	10"	86 5/8x33 7/8x50"	220 Lb	276 Lb	1	**1
PREMIUM	152 cm	107.5x107.5 cm	51 mm	25 mm	25.4 mm	250 mm	220x86x127 cm	100 kg	125 kg	1	1

Cutting capabilities may vary depending on the head position, special plates and disc diameter.

- 2 Equipped with ZERO DUST system. Tested and certified by TNO.
- Wheels and handle included. Easy transport.
- 4 Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · Removable aluminium tables for easy cleaning of the machine.
- · With thermic security switch.
- · Water pump refrigeration of blade with flow control valve.
- · Diamond blade 010" (250mm) not included.
- · With a double set of flanges, one especially designed for mitre
- · Motor assembly mounted on sliding bearings for maximum accuracy mitre cuts.
- · Safety protector for segmented blades.
- · With lateral stop for repetitive cuts.
- · Retractable legs with "shield" function and wheels for easy transportation.
- · Removable water tank system.
- · 2mW line laser.
- · Spirit level for easy field installation.
- · Machine supplied without cable.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

provided mand	second and spidsh standard protector
	Accessories:
	Ref. 51916 Tile Fixer DV/DC/DCX/DS/DX
F	Ref. 51914 Roller Table Extension DU/DC/DCX/DS/DX (from 2013)
	Ref. Cables with plug

	REF	52920	52922	
DS-250 N 1000	Voltage	230V-50 Hz.	220V-60 Hz.	
	RPM	2800	3400	
	REF	52930		
DS-250 N 1300	Voltage	230V-50 Hz.		
	RPM	2800		
	REF	52940	52942	52945
DS-250 N 1500	Voltage	230V-50 Hz.	220V-60 Hz.	380V-50 Hz. 3F
	RPM	2800	3400	2800



曲























DCX-250 XPERT

Suitable for intensive cutting of porcelain, stoneware and ceramic tile. For occasional cutting of natural stone such as marble or granite.































	\triangle				x1/x2	➾	\varnothing	Ø			
DCX-250 XPERT 1250	PREMIUM	52 3/8"	49 3/16"	35 7/16x35 7/16"	2 3/8 / 3 9/16"	1 15/16"	1"	10"	172 Lb	1	**1
DCA-230 APERI 1230	PREMIUM	133 cm	125 cm	90x90 cm	60 / 90 mm	50 mm	25.4 mm	250 mm	78 kg	1	1
DCV 3F0 VDFDT 1FF0	DDEMILIM	64 3/16"	61 1/16"	43 5/16x43 5/16'	2 3/8 / 3 9/16"	1 15/16"	1"	10"	190 Lb	1	**1
DCX-250 XPERT 1550	PREMIUM	163 cm	155 cm	110x110 cm	60 / 90 mm	50 mm	25.4 mm	250 mm	86 kg	1	1

The cutting capacities can vary depending on the head position, special flanges and disc diameter

- Reinforced aluminium chassis with innovative triple beam system and steel sides. Improves the stability and rigidity of the chassis.
- 2 Reinforced cutting guide for a better cut
- 3 New adjustable cooling system. Increases cooling efficiency and reduces water dispersion.
- 4 High performance plunge effect. Cutting height adjustment.
- · Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the
- · Steel double settling system for improved efficiency and water
- · Angular measurement with aluminium square adjustable from 0° to 60° for repetitive cuts.
- · Includes reinforced folding legs with folding-prevention system and quick lock.
- External and easy to remove water tank with 30 L capacity.
- · Includes improved splash guard system with auto-sliding protective cover.
- · Patented ZERO DUST system exclusive to RUBI certified by the TNO, for safe exposure thanks to the reduction of the breathable dust particles generated during the cut.
- · Ergonomic bi-material handle for comfortable operation of the cutting head.
- · Earth integrated into the chassis.
- · Does not include power cable.
- · Not Supplied with a blade.

Accessories



Ref. 51927 Set of flanges 0170mm DCX-250

	REF	52960	52961	52962
DCX-250 XPERT 1250	Voltage	230V-50Hz.	110V-50Hz.	120V-60Hz.
1230	RPM	2750	2750	3350
	REF	52970	52971	52972
DCX-250 XPERT	Voltado	370V FOUL	110V-50Hz.	120V-60Hz.
1550	Voltage	230V-50Hz.	1101-3002.	1201 00112.



曲






















DC-250 PYTHON

For Wall tiles, floor tiles, porcelain tiles and other materials.







- 2 Steel plate structure. Sturdy and maximum resistance to working conditions.
- 3 Plunge effect allowing cutting height adjustment.
- 4 C³ Python cooling system. New adjustable refrigeration system. Allows to adjust the point of water's fall depending on the material's thickness, getting a direct impact of the water in the cutting point. This allows to increase the refrigeration's efficiency and to reduce water dispersion.
- · Foldable legs with wheels for an easier transportation and removable tables for easy cleaning of the machine.
- · Adjustable aluminium square (0° 60°) with lateral stop for repetitive cuts at 0° and 45°.
- · Safety protector for turbo and segmented blades.
- · Blade cooling by water (50W water pump) with flow control.
- · Includes diamond blade CEV-SUPERPRO 0250 (*Ref. 56949 includes CPA- SUPERPRO 0250 blade).
- · Supplied without cable.
- · Side labels redesign, to give a more modern outlook.



























	\triangle					⇌	(\varnothing			*		
DC-250 PYTHON 850	SUPERPRO	33 11/16"	38 9/16"	27 3/8x27 3/8"	2 3/8 / 3 9/16"	2 3/16"		10"	53 15/16x23 1/4x51 9/16"	120.2 Lb	153.2 Lb	1	**1
DC-230 PTIHUN 030	JUPERPRU	85.5 cm	98 cm	69.5x69.5 cm		250 mm	137x59x131 cm	54.5 kg	69.5 kg	1	1		
DC-250 PYTHON 1200	SUPERPRO	42 1/2"	47 5/8"	33 7/16x33 7/16"	2 3/8 / 3 9/16"	2 3/16"		10"	63 3/4x32 5/16x51 9/16"	131.28 Lb	165 Lb	1	1**
DC-250 PYTHUN 1200	SUPERPRU	108 cm	121 cm	85x85 cm	61 / 90 mm	55 mm	-	250 mm	162x82x131 cm	59.55 kg	75 kg	1	1

	REF	56941	56937	56938	
DC-250 PYTHON 850	Voltage	230V-50Hz	220V-60Hz	110V-50Hz	
F I IIION 050	RPM	2790	2790	2790	
DC-250	REF	56939	56943	56947	56949
PYTHON	Voltage	230V-50Hz.	220V-60Hz.	110V-50Hz.	230V-50Hz.
1200	RPM	2790	2790	2790	2790



##
























DV-200


For all types of ceramic and porcelain tiles and other materials.











Removable aluminum tables for easy cleaning of the machine.

- · Includes diamond disc CEV PRO 0 200 mm.
- Direct motor, single phase 1.1 kW (1.5 HP) with thermal protector.
- · Water pump refrigeration of blade with flow control.
- · Reinforced chassis, greater structural rigidity.
- · Adjustable lateral stop (0 ° to 60 °) for repetitive cuts.
- · Large work area (100x48.5cm) suitable for large formats.
- · Working height of 84.5 cm. For improved user ergonomics.
- · Double Switch (ON/OFF) guick and easy access.
- \cdot Foldable head at 45° for miter cuts that can cut up to 106 cm length.
- Equipped with C³ SYSTEM. The most effective cooling and cleaning system for blades. Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- · Machine supplied without cable.

	Accessories
1 10	Ref. 54999 Laser & Level Kit DV/DC/DCX/DS/DX
	Ref. 54993 Table Extension DV/DC/DCX
	Ref. 51916 Tile Fixer DV/DC/DCX/DS/DX





















UV-ZUU 1UUU V		\triangle			Æ,	⇌	(Ø			
	DV-200 1000	SUPERPRO	41 3/4" 106 cm	30 1/8x30 1/8" 76.5x76.5 cm		9/16" 15 mm	$\sqrt{}$	8" 200 mm	133.4 Lb 60.5 kg	1	**1

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.





























DU-200 EVO









- Built-in foldable legs. Very easy to fix.
 - With wheels and handle for a more comfortable transport and handling.
 - 3 External water tank, easy to handle and
 - ³ System, improves blade's cleaning and cooling for a higher performance.
 - · Motor assembly mounted on sliding bearings and foldable for
 - · With lateral stop for repetitive cuts and adjustable square from
 - · Direct drive motor with thermal protector and reinforced
 - · Corrugated tube to protect power cable and water pipe.
 - Equipped with C³ SYSTEM. The most effective cooling and cleaning system for blades. Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
 - · Bi-material handle, better ergonomics.
 - · With CEV-SUPERPRO diamond disc Ø 200 mm.

Accessories
Ref. 5973 Cleaning Block
Ref. 5974 N-Cleaning Block























	\triangle				ightharpoons	\odot	\varnothing				
DU-200 EVO 650	PRO	25 9/16"	17 11/16x17 11/16"	13/8"	13/16"	2/	8"	46 1/16x15 3/8x40 3/16"	49.6 Lb	1	0
DO 200 LVO 030	FILU	65 cm	45x45 cm	35 mm	20 mm	V	200 mm	117x39x102 cm	22.5 kg	1	
חון ספט דעם פרט	000	33 7/16"	24x24"	1 3/8"	13/16"	ا	8"	53 9/16x15 3/8x40 3/16"	60 Lb	1	
DU-200 EV0 850	PRO	85 cm	60x60 cm	35 mm	20 mm	V	200 mm	136x39x102 cm	27.2 kg	1	

The displayed product may not correspond exactly with the actual model

DU-200	REF	55903	55905	55906	55907	55938	55939
EVO	Voltage	230V-50Hz. ²	30V-50Hz.1 UK	10V-50Hz UK	.120V-60Hz. USA	220V- 60Hz.	240V-50Hz. AUS.
650	RPM	2915	2915	2670	3200	3490	2915
	REF	54975	54976	54977	54974		
DU-200 EVO 850		230V-50Hz. ¹	20V–60Hz. USA	230V- 50Hz. UK	110V 50Hz. UK		
L A O O O O	RPM	2915	3490	2915	2915		






























0

ND-200

Cut & Drill

Portable cutter, ideal for finishings and renovations. For cutting ceramic tiles and other materials.







- Lightweight and compact, ideal for working in small spaces.
- 2 Stainless steel folding table. More durability.
- Fast positioning system at 45°. Easy to use.
- 4 Removable disk protector for vertical cuts. Simplifies creation of light boxes, frames, etc...
- · CEV-PRO 08" (200mm) diamond blade included.
- · Water refrigeration of the blade.
- · Lateral stop to allow repetitive cuts.
- · Electric cable: 4.9ft (1,5m).
- · Direct drive with thermal protector.
























	\triangle			\Longrightarrow		0	\varnothing				
ND-200	nnn	∞		9"	1 9/16"	2/	8"	20 1/16x20 11/16x9 7/16"	37.9 Lb	1	0
ND-200	PRO		∞	23 cm	40 mm	V	200 mm	51x52.5x24 cm	17.2 kg	1	0

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.





XX

ND-180

Cut & Drill

Portable cutter, ideal for finishings and renovations. For cutting ceramic tiles, ideal for floor and wall tiles.



- Water refrigeration of the blade.
- 2 With foldable table for mitre cutting up to 7 7/8" (20cm).
- 3 With lateral stop for repetitive cuts.
- 4 Guide for 45° cuts.
- · Single-phase motor.
- · For wall tiles, floor tiles and other materials.
- · Diamond blade 07" (180mm) included.
- · With thermic security switch.
- · Electric cable: 4.9ft (1,5m).
- · Model with carry case, supplied with 2 blades. (Ref. 25945, 25964, 24956)






















3	EAE	TÜV G

	REF		\triangle	5	RPM			\Longrightarrow	Æ,	Ø				
ND-180	25925	_	PRO	230V-50 Hz.	2800	∞	∞	8"	1 3/8"	7"	15 9/16x15 3/16x9 5/8"	26 Lb	1	24
NB 100	23723		PRU	2100 112.	2000	ω	<u> </u>	20 cm	35 mm	180 mm	39.5x38.5x24.5 cm	11.8 kg	1	24
ND-180	25926	_	PRO	120V-60 Hz.	2800			8"	1 3/8"	7"	15 9/16x15 3/16x9 5/8"	26 Lb	1	24
ND-180	23920	-	PKU	12UV-0U HZ.	2800	∞	∞	20 cm	35 mm	180 mm	39.5x38.5x24.5 cm	11.8 kg	1	24
ND-180	25927	_	PRO	220V-60 Hz.	חחח			8"	1 3/8"	7"	15 9/16x15 3/16x9 5/8"	26 Lb	1	24
ND-180	23921	-	PKU	22UV-0U HZ.	2800 ∞	∞ ∞	20 cm	35 mm	180 mm	39.5x38.5x24.5 cm	11.8 kg	1	24	
ND-180 USA	25963	_	PRO	120V-60 Hz.	2800	∞	∞	8"	1 3/8"	7"	15 9/16x15 3/16x9 5/8"	26 Lb	1	24
NB 100 03A	2,700		PNU	120 0 0 112.	2000	ω	ω	20 cm	35 mm	180 mm	39.5x38.5x24.5 cm	11.8 kg	1	24
ND-180	25945	2/	PRO	230V-50 Hz.	2800		-0	8"	1 3/8"	7"	15 9/16x15 3/16x9 5/8"	29.01 Lb	1	12
ND-100	23743	√ PRU 230V-50 Hz. 2800 ∞	00	∞ ∞	20 cm	35 mm	180 mm	39.5x38.5x24.5 cm	13.16 kg	1	12			
ND 100 III/	7/05/	-1	DDO	770V F0 II=	2000			8"	1 3/8"	7"	15 9/16x15 3/16x9 5/8"	29.01 Lb	1	12
ND-180 UK.	24956	√	PRO	RO 230V-50 Hz.	2800	00	∞	20 cm	35 mm	180 mm	39.5x38.5x24.5 cm	13.16 kg	1	12



































DR-350

For all types of building materials like: masonry bricks, facade bricks, fireproof bricks, marble, granite and ceramic tiles.



- Head with high performance plunge effect. Large cutting capacity.
- 2 Equipped with ZERO DUST system. Tested and certified by TNO.
- 3 Large table for a larger work surface and comfort.
- 4 Steel structure robustness. Increased resistance to the demands of intensive work.
- · Equipped with protective safety system for segmented blades.
- · With thermal protector. Except three-phase motors.
- · Adjustable head to 45°.
- · Large table 23 1/16"x19 1/2" (58.5x49.5cm).
- · Blade refrigeration by water pump with integrated regulation
- · Diamond blade 012-14" (300-350mm) not included.
- · Machine supplied without cable.
- · Direct drive.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector.

Accession
Accessories
Cables with plug





























<				x1/x2	\varnothing			<u> </u>		
DR-350 SUI	PERPRO 28 1/	33 1/16"	17 1/8x17 1/8"	3 3/4 / 5 7/8"	12-14"	45 1/4x27 3/16x52 3/16" 115x69x132.5 cm	139 Lb	2	1	**1
וטכ אם	71.5 c	m 84 cm	43.5x43.5 cm	95 / 150 mm	300-350 mm	115x69x132.5 cm	63 kg	v	1	1

	REF	56940	56942	56948
DR-350	Voltage	230V-50 Hz.	220V-60 Hz.	380V-50 Hz.3F
	RPM	2800	2800	2800

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter. Ref. 56948 [3F]: 4 CV/HP.



#

(o)

t

XX





N-CLEANING BLOCK





(o)

ACCESSORIES FOR ELECTRIC CUTTERS

• Accessories for electric cutters.



· For cleaning of diamond blades.

	REF	\triangle	
CLEANING BLOCK	05973	SUPERPRO	5



· Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.

	REF	\triangle	
N-CLEANING BLOCK	05974	SUPERPRO	5

SET OF FLANGES FOR MITRING CUTS.





- \cdot Great accuracy when making miters cuts.
- · Available in several models.

	REF	\triangle	
SET OF FLANGES 0184MM DX-350	51915	SUPERPRO	1
SET OF FLANGES 0170MM DCX-250	51927	SUPERPRO	1
SET OF FLANGES 0130MM DV/DC/DX-250	57991	SUPERPRO	1

ROLLER TABLE EXTENSION





- With rollers to simplify movement of the tiles.
- · With adjustable foldable legs.
- Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb (70kg).
- · Installation on both sides of the machine.

	REF	\triangle	
ROLLER TABLE EXTENSION DU/DC/DCX/DS/DX (FROM 2013)	51914	SUPERPRO	1



XX

TILE FIXER DV/DC/DCX/DS/ DX







#

(o)

t

XX



- · Allows the fixing of the tile during cutting, thus avoiding sudden movements.
- · Accessory adaptable to DV,DC,DS and DX series (up to 2009].

	REF	\triangle	
TILE FIXER DV/DC/DCX/DS/DX	51916	SUPERPRO	1



· Increases work surface for large format tiles. 23 5/8"(600x230mm).

- · Maximum weight: 22Lb, (10kg).
- · Available in several models.

	REF	\triangle	
TABLE EXTENSION DS/DX (FROM 2014)	54991	SUPERPRO	1
TABLE EXTENSION DV/DC/DCX	54993	SUPERPRO	1

ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX

LATERAL STOP FOR DC/DCX/ DS/DX



- · For fixing large format tiles.
- · Adjustable to the maximum length of electric cutter.
- Tile is held laterally thus avoiding any movement.
- · Especially suitable for blocking and execution of repetitive miter.

REF		
4844	SUPERPRO	1
	VEL	

- · Lateral Stop 19 11/16" (50cm).
- · Facilitates positioning of the tile, while reducing the percentage of errors.
- · Accessory adaptable to DW-250-NL (up to 2012).

	REF	\triangle	
LATERAL STOP FOR DC/DCX/DS/DX	54822	SUPERPRO	1

LASER & LEVEL KIT DV/DC/ DCX/DS/DX








- · Kit includes:
- · Circular bubble level to facilitate proper positioning of the electric cutter.
- · Laser Tracer indicating the passage of the disc and facilitates placement of material.
- · Laser power: 2 mW
- · Laser Class: 2

	REF	\triangle	
LASER & LEVEL KIT DV/DC/DCX/DS/DX	54999	SUPERPRO	1



ELECTRIC CUTTING AND MITERING SAWS





· Approximate length 3.5m.

	REF	\triangle	5	
CABLE WITH PLUG	58850	CHDEDDDO	230V - 50 Hz.EUR	1
230/50 EUR	20020	JUPEKPKU	23UV - 3U HZ.EUK	1
CABLE WITH PLUG	58851	CHDEDDDO	380v-50 Hz.EUR	1
380/50 EUR	20021	JUPEKPKU	30UV-3U HZ.EUK	1
CABLE WITH PLUG	58852	SUPERPRO	110v-50 Hz.UK	1
110/50 UK	30032	JUPEKPKU	11UV-3U HZ.UK	1
CABLE WITH PLUG	58853	SUPERPRO	230V-50 Hz.UK	1
230/50 UK	20023	SUPERPRU	23UV-3U HZ.UK	1
CABLE WITH PLUG 120/60	58854	CHDEDDDO	120V-60 Hz.15 A	1
15A 12AWG USA	20024	SUPERPRO	12AWG USA	1
CABLE WITH PLUG	58856	SUPERPRO	220V-60 Hz.15 A	1
220/60 15A 12AWG USA	95995	SUPERPRU	12AWG USA	1
CABLE WITH PLUG	F00/7	CHDEDDDO	230v - 50 Hz. 10A	1
230/50 10A AUS	58863 SUPERPRO		AUSTR.	1

	FLANGES INCLUDED	ACCESORIES AVAILABLE	USE
DX-350 N	Ø 90 mm	Ø 68 mm	INCREASED CUTTING THICKNESS
	6 75 11111	0 184 mm	MITER CUT
DC_2E0 N	Ø 90 mm		MITER CUT
DS-250 N	Ø 138 mm	-	MITER LUT
DCV 3F0 VDFDT	0.00	0 130 mm	MITED CUT
DCX-250 XPERT	0 90 mm -	Ø 170 mm	MITER CUT
DC DCC DVTUQU	0.00	Ø 130 mm	MITED CUT
DC-250 PYTHON	0 90 mm	0 170 mm	MITER CUT
DV-200 1000	0 90 mm	Ø 130 mm	MITER CUT
DU-200 EVO	0 65 mm	-	-

FLANGE AVAILABLE

FLANGES

0 250	Ø 170 mm

(o)

××

ELECTRIC CUTTING AND MITERING SAWS

	ND	DV-200	DC-250	DS-250	DCX-250	DX-350	DR-350
				<u>r</u> •			
N-CLEANING BLOCK	05974	05974	05974	05974	05974	05974	05974
CLEANING BLOCK	05973	05973	05973	05973	05973	05973	05973
SET OF FLANGES FOR MITERING CUTS		57991	57991		57991	51915	
SET OF PLANUES FOR MITERING COTS		1771	51927		51927	51715	
ROLLER TABLE EXTENSION		51914	51914	51914	51914	51914	
TABLE EXTENSION		54993	54993	54991	54993	54991	
TILE FIXER DV/DC/DCX/DS/DX		51916	51916	51916	51916	51916	
LATERAL STOP FOR DC/DCX/DS/DX			54822	54822	54822	54822	
ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX			54844	54844	54844	54844	
LASER & LEVEL KIT DV/DC/DCX/DS/DX		54999	54999	54999	54999	54999	



##























(o)

XX

CIRCULAR SAW TC-180

Cut & Drill

Precise cutting on large format materials. For dry and wet cutting of ceramic, porcelain and other materials.



 ϵ



- Practical cutter and easy to use for large
- 2 Double cooling system, wet and dry. Greater adaptability to environment.
- **3** Guiding mark for better visibility of the line of cut.
- 4 Easy adjustment of cutting thickness. Greater versatility and adaptability to the different materials.
- · Especially suitable for large pieces.
- · Allows the user to reduce manipulation, handling heavy or akward use.
- · Content:
- Blade Ø180mm TCR-180 SUPERPRO.
- Parallel guide.
- Cable with PRCD switch (differential).
- Cone reducer for vacuum cleaner.
- Transport case.

	Accessories
	Ref. 50956 80cm Guide for TC-180 (31 1/2")
	Ref. 50957 Guide connector
=	Ref. 50958 Fixing C-clamp









	REF	\triangle		RPM	W	5		\varnothing	\varnothing		\odot				
TC-180	50939	SUPERPRO	2	5800	1800 W	230V / 50-60Hz	2 3/16"	7"	7/8"	13x17 11/16x14 15/16"	2/	14.8 Lb	24 Lb	1	10
15-100	30737	JUPEKPKU	V	2000	1000 W	2307/30-0002	55 mm	180 mm	22.2 mm	33x45x38 cm	V	6.7 kg	11 kg	1	10
							וווווו ככ	180 111111	22.2 [1][[]	33X43X38 LIII		0.7 Kg	II Kg		







ACCESSORIES FOR CIRCULAR SAW TC-180



- · Kit includes:
- 1 x Circular Cutter TC-180 230V 50/60Hz (Ref. 50939), 1 x Blade TCR-180 (Ref. 31975), 2 x Guide 80 cm. for TC-180 (Ref. 50956), 1 x Connector guides (Ref. 50957), 2 x Fixing Clamps (Ref. 50958).

	REF	\triangle		
TC-180 230V/50-60HZ KIT	50994	SUPERPRO	1	8

TC-180 GUIDES





- · Aluminium Guide for straight cuts.
- · Ability to connect multiple guides through the connector [Ref. 50957].

	REF	\triangle				
80CM GUIDE FOR	F00F/	SUPERPRO	32 5/16x7 5/16x13/16"	2.78 Lb	1	
TC-180 (31 1/2")	20720	SUPERPRU	82x18.5x2 cm	1.26 kg	1	
120CM GUIDE FOR	רחחרח	CHDEDDDO	47 5/8x7x13/16"	4 Lb	1	
TC-180 (47 1/4")	50959 SUPERPR		121x18x2 cm	1.8 kg	1	

GUIDE CONNECTOR





· Allows the connection of multiple guides to increase cutting length.

	REF	\triangle	
GUIDE CONNECTOR	50957	SUPERPRO	1

FIXING C-CLAMP





 Highly recommended for fixing the guide on the tile and preventing movement through out the cut, thus achieving a cleaner cut.

	REF	\triangle	
FIXING C-CLAMP	50958	SUPERPRO	1



#

























 \odot

d

PRO-EDGER BEVELLING AND MITRING ACCESSORY

g Cut & Drill

Professional portable system for intensive use, especially designed for dry bevelling and mitring principally of large format tiles.

It can bevel and mitre porcelain, ceramic and any natural stone material of any length.



	REF	\triangle		\Longrightarrow	➾	Ø			*		
PRO-EDGER PORTABLE BEVELING	14064	5956 SUPERPRO	$\sqrt{}$	∞	13/16"	0"	14 15/16x8 1/4x6 11/16"	9 Lb	9.9 Lb	1	7/4
PRO EDULK PORTABLE DEVELING	10730			•	20 mm	M14 mm	38x21x17 cm	4.1 kg 4.5 kg	1	24	
DDO EDEED DODTADI E DEVELIME HEA	1/001	16901 SUPERPRO	-1		13/16"	3/16 / 5/16	" 14 15/16x8 1/4x6 11/16"	9 Lb	9.9 Lb		7/
PRO-EDGER PORTABLE BEVELING USA	10901		V	∞	20 mm	5/8 - 11 mn	n 38x21x17 cm	4.1 kg	4.5 kg	1	24

- It makes mitre cuts at 45° up to a maximum thickness of 20 mm, and with no thickness limitation for bevelling.
- Progressive bevelling and mitring at different depths to prolong the useful life of the grinding wheel and make bevelling easier for the user.
- 3 Compatible with 115 & 125mm angle grinders with cable or battery that are easily and safely fitted thanks to the joint made with an M14 threaded shaft and quick-fastening belt.
- Sealed high-speed bearings, to prevent the ingress of dust generated during the bevelling or mitring.
- · Highly wear-resistant polyethylene slides.
- \cdot A vacuum cleaner can be easily fitted for dust extraction (ZERO-DUST).
- · Quick and simple grinding wheel change.
- · Chassis with carbon steel sheet.
- · Highly friction-resistant white polyethylene slides
- · Plastic handle.
- · Sealed single-row deep-groove ball bearings.
- · 45° x 20 mm grinding wheel included (ref. 16946).
- Compatible with ZERO DUST system by means of a clip for fixing a vacuum cleaner.
- · PVC plastic grinding wheel guard.
- · Fixing to angle grinder by means of a 14 mm diameter shaft and quick fastening belt.
- Compatible with 115 & 125mm angle grinders with cable or battery up to 850 W. Up to 100 mm diameter handle.
- · Progressive wear bevelling and mitring is adjustable by 10 mm.
- · A damp cloth is recommended for cleaning.
- · Lubrication is not necessary.

	Accessories
	Fine Grit PRO-EDGER mitring Wheel
10	Turbo Twist Coarse Grit PRO-EDGER mitring Wheel
	Fine Grit PRO-EDGER bevelling Wheel



XX

ACCESSORIES FOR BEVELLING AND MITRING

FINE GRIT PRO-EDGER MITRING WHEEL



TURBO TWIST COARSE GRIT PRO-EDGER MITRING WHEEL





#

⊙

t



- · Grinding wheel for mitring.
- Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 – 12000 rpm.
- · 45° type tool with 1-2 mm edge.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF	\triangle	\varnothing	Ø		RPM		
45X20 SMOOTH FINE GRIT PRO-FDGER	140/4	SUPERPRO	3 11/16"	0"	13/16"	12000	5	
MITRING WHEEL	10740	JUPLKPKU	94 mm	M16 mm	20 mm	max.	,	
45X15 SMOOTH FINE GRIT PRO-FDGER	16985	SUPERPRO	3 5/16"	0"	9/16"	12000	Е	
MITRING WHEEL	10703	JUPEKPKU	84 mm	M16 mm	15 mm	max.		



- · Grinding wheel for mitring.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 – 12000 rpm.
- The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF	\triangle	\varnothing	Ø		RPM		
TURBO TWIST COARSE GRIT PRO-FOGER	16984	SUPERPRO	3 5/16"	0"	9/16"	12000		
MITRING WHEEL 45X15	10704	JUPERPRU	84 mm	M16 mm	15 mm	max.)	

FINE GRIT PRO-EDGER BEVELLING WHEEL





- · Grinding wheel for bevelling.
- Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 - 12000 rpm.
- · Round finish available on 5 and 10 mm radius.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF	\triangle	\varnothing	Ø	11111	RPM		
FINE GRIT R.5 PRO- EDGER BEVELLING	16957	SUPERPRO	2 5/8"	0"	1/4"	12000	5	
WHEEL	10/3/	JOI EINI NO	66 mm	M16 mm	6 mm	max.	-	
FINE GRIT R.10 PRO-FDGFR	16958	SUPERPRO	3"	0"	7/16"	12000	5	
BEVELLING WHEEL	10730	JOFLINFINO	76 mm	M16 mm	11 mm	max.		





曲

(o)

<u>t</u>

AS-30 PRO VACUUM CLEANER

Vacuum adaptable to electric machines

To vacuum wet or dry.

Cut & Drill

- · Power: 1400 W. · Airflow: 58 I / s.
- · Vacuum: 180 mbar. (18 psi.)

· For wet and dry vaccuming.

- · Capacity: 30 I.
- · Double switch: On / Off and automatic start.
- · Socket for electric tool (max.2000W)
- · Electrical cable: 4 m.
- · Accessories included:
- · Hose, nozzle (35/37 mm) and crevice tool.
- Steel pipes.
- Wet brush.
- Filter damp sponge for wet.
- HEPA filter for dry.



Accessories:
Ref. 50964 AS–30 PRO Vacuum Cleaner Paper Bag.
Ref. 50998 AS–30 PRO Vacuum Cleaner Dry Filter
Ref. 50999 AS–30 PRO Vacuum Cleaner Wet Filter.







	REF		. 5			
AS-30 PRO VACUUM CLEANER	50962	PRO	210-240V/50-60 Hz	25 3/16x14 15/16x14 15/16" 64x38x38 cm	1	9





××

ACCESSORIES AS-30 PRO

· Range of accessories compatible with AS-30 PRO vacuum cleaner.

AS-30 PRO VACUUM CLEANER PAPER BAG.



 \bigotimes



- · Paper bag for dust vacuuming.
- · Compatible with AS-30 PRO.
- · Biodegradable.
- · 4 units set.

	REF	\triangle	
AS-30 PRO VACUUM CLEANER PAPER BAG.	50964	PRO	1

AS-30 PRO VACUUM CLEANER DRY FILTER







- · HEPA filter for dry vacuuming.
- · Compatible with AS-30 PRO.
- · Minimum particle size: 5 µm.

	REF	\triangle	
AS-30 PRO VACUUM CLEANER DRY FILTER	50998	PRO	1


AS-30 PRO VACUUM CLEANER WET FILTER.





- · Filter for wet vacuuming.
- · Compatible with AS-30 PRO.
- · 2 units set.

	REF	\triangle	
AS-30 PRO VACUUM CLEANER WET FILTER.	50999	PRO	1

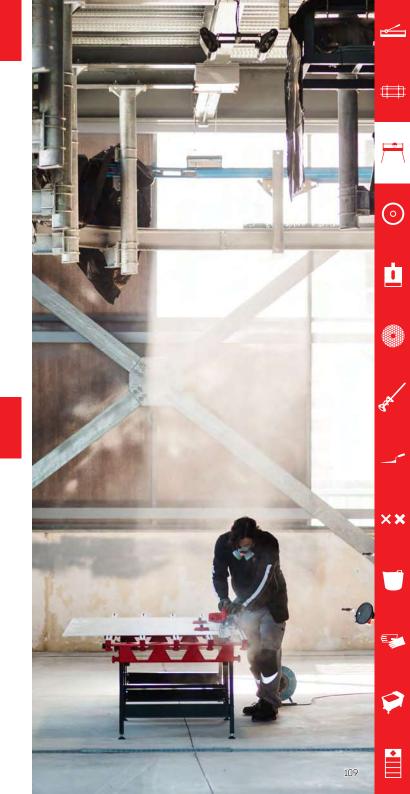



DIAMOND BLADES

Dry cutting diamond blades Wet cutting diamond blades



















XX

DIAMOND BLADES - DRY CUT

• Diamond blades without need of water for cooling.

GENERAL PURPOSE SEGMENTED DIAMOND BLADE (STT)



GENERAL PURPOSE SEGMENTED DIAMOND BLADE (SEV)









- Recommended blade for cutting all types of building materials, included Reinforced concrete. High performance and speed of cutting.
- · For cutting materials > 25 mm thickness.
- · Only for straight cuts, not suitable for mitering.

	REF	\triangle	Ø	Ø		Ů	RPM		
STT 115 SUPERPRO	30974	SUPERPRO	7/8"	4 1/2"	1/16"	3/8"	13300	5	
SUPERPRO	30774	SUPERPRU	JULEKLIKO	22.2 mm	115 mm	2.2 mm	10 mm	max.	,
STT 230 SUPERPRO	30976	SUPERPRO	7/8"	9"	1/16"	3/8"	6650	1	
SUPERPRO	01/10	JULLIVI	22.2 mm	230 mm	2.2 mm	10 mm	max.	1	

- · Recommended for cutting building materials such as brick, concrete, terrazzo.
- The fastest. Maximum speed and best blade's cooling. To cut materials with more than 1" (25 mm) thickness.
- · Perforated steel blade to improve cooling and diminish cut's tensions.
- · Only for straight cuts, not suitable for mitering.

	REF		\varnothing	\varnothing	P	٥	RPM	
SEV 115	25915	PRO	4 1/2"	7/8"	1/16"	5/16"	13300	5
PRO	2,771	PRU	115 mm	22.2 mm	1.6 mm	8 mm	max.	
SEV 125	32940	PRO	5"	7/8"	1/16"	5/16"	12250	
PRO	J274U	PRU	125 mm	22.2 mm	1.6 mm	8 mm	max.	
SEV 230	DEN14	PRO	9"	7/8"	1/16"	5/16"	6650	1
PRO	25916		230 mm	22.2 mm	2.3 mm	8 mm	max.	1



CERAMIC TILES CONTINUOUS RIM DIAMOND BLADE (CSV)

Cut & Drill

HARD MATERIALS TURBO DIAMOND BLADE VIPER (TVR)

2 Cut & Drill







#

<u></u>

<u>t</u>







- Recommended for cutting building materials such as bricks, concrete, terrazzo.
- \cdot A great combination. High performance and cutting speed with high standard finishes.
- \cdot Only for straight cuts, not suitable for mitering with angle grinder.

	REF	\triangle	Ø	Ø		٥	RPM	
TSV 115	25917	PRO	4 1/2"	7/8"	1/16"	5/16"	13300	5
PRO	23717	PRU	115 mm	22.2 mm	2 mm	8 mm	max.	ر
TSV 125	31980	PRO	5"	7/8"	1/16"	5/16"	12250	5
PRO	31700	PKU	125 mm	22.2 mm	2.2 mm	8 mm	max.	כ
TSV 230	25918	PRO	9"	7/8"	1/8"	5/16"	6650	1
PRO	23710	PRU	230 mm	22.2 mm	2.5 mm	8 mm	max.	1
TSV 125	31982	SUPERPRO	5"	7/8"	1/16"	5/16"	12250	5
SUPERPRO	31702	JUPERPRU	125 mm	22.2 mm	2 mm	8 mm	max.	כ

- · Blade for general cut of ceramic tiles as wall tile, floor tiles, porcelain.
- The best finish. To cut ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.
- · Only for straight cuts, not suitable for mitering with angle grinder.

	REF	\triangle	Ø	Ø		७	RPM	
CSV 115	25910	PRO	4 1/2"	7/8"	1/16"	5/16"	13300	
PRO	23710	PKU	115 mm	22.2 mm	1.6 mm	8 mm	max.	
CSV 125	31915	PRO	5"	7/8"	1/16"	5/16"	12250	С
PRO	31713	PRU	125 mm	22.2 mm	1.6 mm	8 mm	max.	
CSV 115	70007	SUPERPRO	4 1/2"	7/8"	1/16"	5/16"	13300	С
SUPERPRO	30002	JUPERPRU	115 mm	22.2 mm	1.6 mm	8 mm	max.	
CSV 125	70007	SUPERPRO	5"	7/8"	1/16"	5/16"	12250	_
SUPERPRO	20002	JUPEKPKU	125 mm	22.2 mm	1.6 mm	8 mm	max.	
CSV 230	70000	CHDEDDDO	9"	7/8"	1/16"	5/16"	6650	1
SUPERPRO	20000	SUPERPRO 2	230 mm	22.2 mm	1.9 mm	8 mm	max.	

- · Recommended blades to cut hard materials such as granite, slate, quartzite, rustic tiles, klinker and porcelain tile.
- · Robust blade, ready to support high tensions in the extremes of the blade.
- · For cutting materials > 3/4" (20 mm) thickness.
- · High cutting speed.
- · Reinforced blade.
- · Is suitable for miter cuts.

	REF	\triangle	\varnothing	\varnothing	P	ⅉ		
TVR 115	30986	SIIPERPRO	4 1/2"	7/8"	1/16"	3/8"	5	
SUPERPRO	20700	JUPLKPKU	115 mm	22.2 mm	1.4 mm	10 mm		
TVR 125	30987	SUPERPRO	5"	7/8"	1/16"	3/8"	Е	
SUPERPRO	30707	JUPERPRU	125 mm	22.2 mm 1.4 mm		10 mm		























- · Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate, quartzite and porcelain tile.
- · The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- · Only for straight cuts, not suitable for mitering.

	REF	\triangle	Ø	Ø		₫	RPM	
TVA 115	31932	SUPERPRO	4 1/2"	7/8"	1/16"	3/8"	13300	5
SUPERPRO	31732	SUPERPRU	115 mm	22.2 mm	1.4 mm	10 mm	max.	כ
TVA 125	31933	CHDEDDDO	5"	7/8"	1/16"	3/8"	12250	5
SUPERPRO	21722	SUPERPRO	125 mm	22.2 mm	1.4 mm	10 mm	max.	כ
TVA 180	31934	SUPERPRO	7"	7/8"	1/16"	3/8"	8500	3
SUPERPRO	51754	SUPERPRU	180 mm	22.2 mm	1.6 mm	10 mm	max.	٥
TVA 230	31935	SUPERPRO	9"	7/8"	1/16"	3/8"	6650	
SUPERPRO	21422	SUPERPRU	230 mm	22.2 mm	1.6 mm	10 mm	max.	1

- · Recommended for cutting high hardness natural stones such as granite, basalt, quartzite, concrete drive, etc.
- · Long life and high performance. Bar of 12 mm.
- · High speed cutting.
- · For cutting materials > 25 mm thickness.
- · Only for straight cuts, not suitable for mitering.

	REF	\triangle	\varnothing	Ø		٥	RPM	
SCA 230	30904	SUPERPRO	9"	7/8"	1/8"	1/2"	6650	1
SUPERPRO	JU7U4	JUPERPRU	230 mm	22.2 mm	3 mm	12 mm	max.	1

- · Recommended blade to cut fine porcelain tiles with less than 3/4" (20 mm) thickness.
- · The best finish.
- · Only for straight cuts, not suitable for mitering with angle grinder.

	REF	\triangle	\varnothing	\varnothing		Ů	RPM	
CPR 115	30972	SUPERPRO	4 1/2"	7/8"	1/16"	5/16"	13300	5
SUPERPRO	JU712	JUPLKPKU	115 mm	22.2 mm	1.7 mm	8 mm	max.	ر
CPR 125	30973	SUPERPRO	5"	7/8"	1/16"	5/16"	12250	_
SUPERPRO	בייוטר	JUPERPRU	125 mm	22.2 mm	1.7 mm	8 mm	max.	٠,



 \odot

d

XX

PORCELAIN TILES TURBO DIAMOND BLADE (TCR)



PORCELAIN TILES J-SLOT DIAMOND BLADE (CPJ)



ABRASIVE MATERIALS SEGMENTED DIAMOND BLADE (SON)









##

XX







- · Recommended blade to cut fine porcelain tiles.
- · High performance and fast cutting speed with high quality finishes.
- · Only for straight cuts, not suitable for mitring with angle grinder.

	REF	\triangle	Ø	Ø		♦	RPM	
TCR 115	31972	SUPERPRO	4 1/2"	7/8"	1/16"	5/16"	13300	_
SUPERPRO	31772	JUFERPRO	115 mm	22.2 mm	1.4 mm	8 mm	max.	
TCR 125	31973	SUPERPRO	5"	7/8"	1/16"	5/16"	12250	_
SUPERPRO	317/3	JUPERPRU	125 mm	22.2 mm	1.4 mm	8 mm	max.	
TCR 180	31975	SUPERPRO	7"	7/8"	1/16"	5/16"	8500	3
SUPERPRO	317/3	JUPERPRU	180 mm	22.2 mm	1.6 mm	8 mm	max.	
TCR 230	31978	SUPERPRO	9"	7/8"	1/16"	5/16"	6650	1
SUPERPRO	317/0	JUPERPRU	230 mm	22.2 mm	2 mm	8 mm	max.	

- · For cutting hard porcelain tiles with the best performance.
- · Specially recommended for straight cuts and high speed cutting.
- · Not for mitre.
- Thanks to J-Slot typology, this disc increases cutting speed on very hard porcelain tiles, while reducing the stresses generated throughout out the cut.
- · It's original design is for dry cutting, but also allows wet cutting.

	REF	\triangle	Ø	Ø		٥	RPM	
CPJ 115	32932	SUPERPRO	4 1/2"	7/8"	1/16"	5/16"	13300	Е
SUPERPRO	32732	JUPERPRU	115 mm	22.2 mm	1.4 mm	8 mm	max.	כ
CPJ 125	32933	SUPERPRO	5"	7/8"	1/16"	5/16"	12250	
SUPERPRO	32733	SUPERPRU		22.2 mm	1.4 mm	8 mm	max.	כ

- · Recommended blades to cut abrasive materials such as bricks, calcareous terrazzo, marble, sandstone.
- · Only for straight cuts, not suitable for mitering.

	REF	\triangle	0	\varnothing	P	♦	RPM	
SON 230	32908	SUPERPRO	9"	7/8"	1/8"	5/16"	6650	1
SUPERPRO	32700	JUPERPRU	230 mm	22.2 mm	2.6 mm	8 mm	max.	1

 \odot

DIAMOND BLADE RESCUE (RSQ)

DIAMOND CUTTING & **GRINDING (ECD)**

















- · Recommended electroplated diamond blade to cut marble, limestone and fibers.
- · Less vibration. To cut those materials with high risk of breaking, as marble and fibers.
- · Only for straight cuts, not suitable for mitering.

	REF	\triangle	\varnothing	\oslash	P	₫	RPM	
EMG 115	Z0005	SUPERPRO	4 1/2"	7/8" 22.2 mm	1/16"	1/8"	13300	5
SUPERPRO	כללטכ	JUPERPRU	115 mm	22.2 mm	2.2 mm	3 mm	max.	2
EMG 230	30997	SUPERPRO	9"	7/8"	1/8"	1/8"	6650	1
SUPERPRO	7640	JUPERPRU	230 mm	22.2 mm	3 mm	3 mm	max	

- · Recommended disc for cutting all types of materials including metal, plastic and wood, and more.
- · Vacuum Brazed Technology.
- · Increased resistance to high temperatures during cutting, reduction of spark generated.
- · High speed and performance.
- · Only for straight cuts, not suitable for mitering.

	REF	\triangle	\varnothing	\varnothing	P	₫	RPM	
RSQ 115 SUPERPRO	znonn	SUPERPRO	4 1/2"	7/8"	1/8"	3/16"	13300	5
SUPERPRO	30700	JUPLKPKU	115 mm	22.2 mm	2.8 mm	4 mm	max.	ر
RSQ 230	כחסחד	SUPERPRO	9"	7/8"	1/8"	3/16"	6650	1
SUPERPRO	JU7UZ	JUPLKPKU	230 mm	22.2 mm	3.0 mm	4 mm	max.	1

- · For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- · For adjustment cuts and grinding on all types of porcelain and hard materials.
- · For cutting materials > 3/4" (20 mm) thickness.
- · Electroplated continous rim blade.
- Two-sided and reversible blade for a better performance.
- · For grinders use. Connection: M14 thread.

	REF		\varnothing	\bigcirc		٥	RPM	
ECD 115 2IN1	7104/	SUPERPRO	4 1/2"	0"	1/16"	1/4"	13300	
SUPERPRO	31704	JUPERPRU	115 mm	M14 mm	1.8 mm	5.6 mm	max.	
ECD 125 2IN1	71045	SUPERPRO	5"	0"	1/16"		12250	Е
SUPERPRO	31703	JUPERPRU	125 mm	M14 mm	1.8 mm	5.6 mm	max.	



XX

DIAMOND BLADES - WET CUT

• Diamond blades cooled with water.

PORCELAIN TILES PREMIUM DIAMOND BLADE (SPT)





- · For cutting all types of ceramic, porcelain and natural stone materials.
- · For cutting thicknesses from 20 mm to 35 mm.
- · Joint by laser welding.
- · Extra-long life.
- Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- · Special bonded alloy that provides a good finish with a very fast cutting speed.

	REF	\triangle	\varnothing	Ø	\$	♦	RPM	
SPT 250	32934	PREMIUM	10"	1"	1/16"	3/8"	6150 max.	1
PREMIUM	32734	PREMIUM	250 mm	25.4 mm	2.2 mm	10 mm	OIDU IIIdX.	1
SPT 300	32935	PREMIUM	12"	1"	1/8"	3/8"	5100 max.	1
PREMIUM	32733	PREMIUM	300 mm	25.4 mm	2.4 mm	10 mm	JIUU IIIdX.	1
SPT 350	7207/	DDEMILIM	14"	1"	1/8"	3/8"	4400	1
PREMIUM	32730	32936 PREMIUM	350 mm	25.4 mm	2.4 mm	10 mm	max.	1

GENERAL PURPOSE SEGMENTED DIAMOND BLADE (SHR)





- Recommended for cutting building materials such as brick, concrete, terrazzo.
- The fastest. Maximum speed and best blade's cooling. To cut materials with more than 1" [25 mm] thickness.

	REF	\triangle	\varnothing	\varnothing		٥	RPM	
SHR 250	32974	PRO	10"	1"	1/8"	3/8"	6150	1
PRO	J27/4	PNU	250 mm	25.4 mm	2.6 mm	10 mm	max.	
SHR 300	32972	PRO	12"	1"	1/8"	3/8"	5100	1
PRO	32712	PKU	300 mm	25.4 mm	2.6 mm	10 mm	max.	1
SHR 350	32971	CHDEDDDO	14"	1"	1/8"	3/8"	4400	1
SUPERPRO	529/1	SUPERPRO			max.	1		





























CERAMIC TILES CONTINUOUS RIM DIAMOND BLADE (CEV)

2 Cut & Drill





RUBI

##

XX

- · Blade for general cut of ceramic tiles as wall tile, floor tiles, porcelain.
- \cdot The best finish. To cut and mitre ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.

			•					
	REF	\triangle	\varnothing	Ø	P	♦	RPM	
CEV 180	25912	PRO	7"	7/8-1"	1/16"	5/16"	8500 max.	3
PRO	23712	PKU	180 mm	22.2 - 25.4 mm	1.7 mm	8 mm	oouu iiidx.	٥
CEV 200	25913	PRO	8"	1"	1/16"	5/16"	7650 max.	1
PRO	23713	PKU	200 mm	25.4 mm	1.7 mm	8 mm	/030 IIIdX.	1
CEV 250	25934	PRO	10"	1"	1/16"	5/16"	6150 max.	1
PRO	20904	PKU	250 mm	25.4 mm	2.2 mm	8 mm	OTOU IIIdX.	1
CEV 180	700/5	SUPERPRO	7"	7/8-1"	1/16"	5/16"	8500 max.	3
SUPERPRO	30743	JUPERPRU	180 mm	22.2 - 25.4 mm	1.7 mm	8 mm	ODUU IIIdX.	2
CEV 200	70077	CHDEDDDO	8"	1"	1/16"	5/16"	7/ [0	-1
SUPERPRO	30740	SUPERPRO	200 mm	25.4 mm	1.7 mm	8 mm	7650 max.	1
CEV 250	70070	CHDEDDDO	10"	1"	1/16"	5/16"	/150	-1
SUPERPRO	30949	SUPERPRO	250 mm	25.4 mm	2.2 mm	8 mm	6150 max.	1
CEV 300	70050	CIIDEDDDO	12"	1"	1/16"	3/8"	F100	-1
SUPERPRO	30730	SUPERPRO	300 mm	25.4 mm	2.2 mm	10 mm	5100 max.	1
CEV 350	70001	SUPERPRO	14"	1"	1/8"	3/8"	4400 max.	1
SUPERPRO	20721	JUPEKPKU	350 mm	25.4 mm	2.6 mm	10 mm	44UU IIIdX.	1

HARD MATERIALS CONTINUOUS RIM DIAMOND BLADE (CPA)





- · Recommended for cutting hard materials such granite, rustic tiles, klinker, firebricks or slate.
- \cdot The best finish. To cut and mitre ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.

	REF	\triangle	\varnothing	\varnothing		Ů	RPM	
CPA 180	30925	SUPERPRO	7"	7/8"	1/16"	5/16"	8500	3
SUPERPRO	30723	JUPERPRU	180 mm	22.2 mm	1.7 mm	8 mm	max.	
CPA 200	30926	SUPERPRO	8"	1"	1/16"	5/16"	7650	1
SUPERPRO	30720	JUPERPRU	200 mm	25.4 mm	1.7 mm	8 mm	max.	1
CPA 250	30929	SUPERPRO	10"	1"	1/16"	5/16"	6150	1
SUPERPRO	30727	JUPERPRU	250 mm	25.4 mm	2.2 mm	8 mm	max.	1
CPA 300	30930	SUPERPRO	12"	1"	1/16"	3/8"	5100	1
SUPERPRO	30730	JUPERPRU	300 mm	25.4 mm	2.2 mm	10 mm	max.	1
CPA 350	30931	SUPERPRO	14"	1"	1/8"	3/8"	4400	1
SUPERPRO	20721	JUPERPRU	350 mm	25.4 mm	2.6 mm	10 mm	max.	1





PORCELAIN TILES CONTINUOUS RIM DIAMOND BLADE (CPC)





- \cdot Recommended blade to cut fine porcelain tiles with less than 3/4" (20 mm) thickness.
- · Specially recommended for mitre cutting.

	REF	\triangle	Ø	Ø	P	٥	RPM	
CPC 180	30955	PRO	7"	7/8-1"	1/16"	5/16"	8500	3
PRO	30733	PRU	180 mm	22.2 - 25.4 mm	1.7 mm	8 mm	max.	٥
CPC 200	30956	PRO	8"	1"	1/16"	5/16"	7650	1
PRO	30730	PRU	200 mm	25.4 mm	1.7 mm	8 mm	max.	1
CPC 230	30958	PRO	9"	7/8-1"	1/16"	5/16"	6650	1
PRO	30730	PRU	230 mm	22.2 - 25.4 mm	2 mm	8 mm	max.	1
CPC 250	30959	PRO	10"	1"	1/16"	5/16"	6150	1
PRO	30737	PKU	250 mm	25.4 mm	2.2 mm	8 mm	max.	1
CPC 300	700/0	nnn	12"	1"	1/16"	3/8"	5100	1
PRO	30960	PRO	300 mm	25.4 mm	2.2 mm	10 mm	max.	1
CPC 350	30961	nnn	14"	1"	1/8"	3/8"	4400	1
PRO	20761	161 PRO	350 mm	25.4 mm	2.6 mm	10 mm	max.	1

PORCELAIN TILES J-SLOT DIAMOND BLADE (CPX)





- · Recommended disc to cut fine porcelain tiles.
- High Tech. High speed on straight cuts on porcelain tiles.
 Only for straight cut, not recommended for mitre cuts.

	REF	\triangle	\varnothing	\varnothing		₫	RPM	
CPX 200	30964	PRO	8"	1"	1/16"	5/16"	7650 max.	1
PRO	JU704	PRU	200 mm	25.4 mm	1.6 mm	8 mm	יווו טעטי.	
CPX 250	30962	PRO	10"	1"	1/16"	5/16"	6150 max.	1
PRO	JU702	PRU	250 mm	25.4 mm	1.6 mm	8 mm	חבדח ווומצי	
CPX 300	700/7	PRO	12"	1"	1/16"	5/16"	5100 max.	1
PRO 30963	PKU	300 mm	25.4 mm	1.6 mm	8 mm	oton illax.	1	





#


























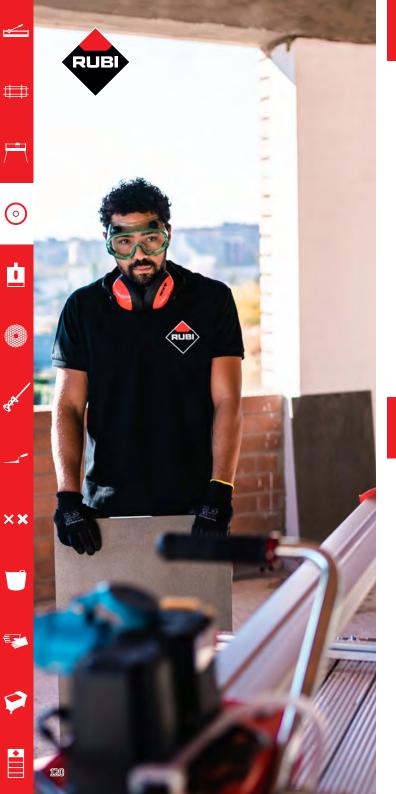

DIAMOND PORCELAIN STONEWARE TURBO MITER (TPI)





- · For the miter cut of porcelain tiles. High stability and speed of cut.
- · Sintered TURBO blade.
- · Laser welding.

	REF	\triangle	\varnothing	Ø	P	₫	RPM	
TPI 200	31966	SUPERPRO	8"	1"	1/8"	5/16"	7650	1
SUPERPRO	J1700	JUPLKPKU	200 mm	25.4 mm	2.5 mm	8 mm	max.	1
TPI 230	31967	SUPERPRO	9"	1"	1/8"	5/16"	6650	1
SUPERPRO	31707	JUPLKPKU	230 mm	25.4 mm	2.5 mm	8 mm	max.	1
TPI 250	710/0	CHDEDDDO	10"	1"	1/8"	5/16"	6150	1
SUPERPRO	31707	31969 SUPERPRO		25.4 mm	2.5 mm	8 mm	max.	1

HARD MATERIALS TURBO VIPER DIAMOND BLADE (TVH)





- · Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate, quartzite and porcelain tile.
- \cdot The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- · For cutting materials > 3/4" (20 mm) thickness.
- · Only for straight cuts, not suitable for mitring.

		REF	\triangle	\varnothing	\varnothing	P	٥	RPM	
	TVH 200	31936	SUPERPRO	8"	1"	1/16"	3/8"	7650	1
	SUPERPRO	J17JU	JUPERPRU	200 mm	25.4 mm	1.6 mm	10 mm	max.	1
	TVH 250	31937	SUPERPRO	10"	1"	1/16"	3/8"	6150	1
	SUPERPRO			250 mm	25.4 mm	1.6 mm	10 mm	max.	
	TVH 300	31938	CIIDEDDDO	12"	1"	1/16"	3/8"	5100	1
	SUPERPRO	31730	SUPERPRO	300 mm	25.4 mm	2 mm	10 mm	max.	1
	TVH 350	31939	39 SUPERPRO	14"	1"	1/8"	3/8"	4400	1
	SUPERPRO	לכלוכ		350 mm	25.4 mm	2.4 mm	10 mm	max.	1

ABRASIVE MATERIALS TURBO DIAMOND BLADE (TON)





- · Recommended blades to cut abrasive materials such as bricks, calcareous terrazzo, marble, sandstone.
- · A great combination. High performance and cutting speed with high standard finishes.

	REF		\varnothing	\otimes		₫	RPM	
TON 200	71004	SUPERPRO	8"	1"	1/8"	5/16"	7650 max.	1
SUPERPRO	31700		200 mm	25.4 mm	2.5 mm	7.5 mm	7030 IIIdX.	
TON 250	31909	SUPERPRO	10"	1"	1/8"	5/16"	6150 max.	1
SUPERPRO	31707		250 mm	25.4 mm	2.5 mm	7.5 mm	OIDU IIIdX.	1




SEGMENTED

The Fastest. Maximum

speed and best blade's







XX





APPLICATION AND USE GUIDE

	CONTINI	UOUS RIM	J-SLOT		TURBO		VII	PER	SEGMENTED			ELECTRI	DPLATED	VACUUM BRAZED		
	CSV	CPR	CPJ	TSV	TSA	TCR	TVR	TVA	STT	SEV	SHA	SCA	SON	EMG	ECD	RSQ
Sandstone				~					~	~			✓			~
Asphalt				~					~	~			✓			~
Wall tile	✓	~	~			✓									~	
Fired-clay tile	<u> </u>			~						~			✓		~	~
Concrete block				~					✓	~			✓			
Rubber																~
Steel plate																~
Quartzite				~	✓		✓	~	~	~	✓	~			~	
Fibreglass														~	~	~
Fibre cement				~					~	~			✓			~
Granite	~			~	~		✓	~	~	~	✓	✓				
Floor tile	~						✓	~							V	
Extruded stoneware	~			~	~		✓	~							V	
Porcelain tile	~	✓	~			✓	✓	~							V	
Reinforced concrete									~		✓	✓				
Cellular concrete				~					~	~			✓			
Cured concrete				~	~				~	~						
Fresh concrete				~					~	~			✓			
Clinker				~	~		✓	~	~	~	✓	~			~	
Face brick				~					~	~			✓			~
Fireproof brick				~					~	~	✓	~				~
Wood																~
Marble	~			~					~	✓			✓	~	✓	
Aluminium profile																~
Volcanic stone				~					~	~			✓			
Slate				~	~		✓	~	~	~	✓	~		~	~	
Ceramic roof tile	~			~						~			✓	~	~	~
Concrete roof tiles				~					~	~			✓			
Glazed roof tile	~			~										~	~	
Calcareous terrazzo				~					~	~			✓	~	~	~
Siliceous terrazzo				~	~		✓	~	~	~	✓	✓				~
Concrete pipe				~	_				~	~			✓			~
Polyethylene (PE) pipe																~
PVC																~
Steel rod																~





APPLICATION AND USE GUIDE

		CONTINUOUS RIM		J-SLOT	TUF	RBO	VIPER	VIPER SEGMENTE	
	CEV	CPA	CPC	СРХ	TON	TPI	TVH	SHR	SPT
Sandstone					✓			✓	
Asphalt					✓			✓	
Wall tile	✓		✓	✓		<u>✓</u>			
Fired-clay tile	✓				✓			✓	
Concrete block					✓			✓	
Quartzite		✓					✓	✓	~
Fibre cement					✓			✓	
Granite	~	✓					✓	✓	~
Floor tile	~	✓					✓		~
Extruded stoneware	~	✓					✓		~
Porcelain tile	~	✓	✓	✓		<u>~</u>	~		✓
Cellular concrete					✓			✓	
Cured concrete								✓	
Fresh concrete					✓			✓	
Clinker							<u>~</u>	✓	
Face brick					✓			✓	
Firebrick							<u>~</u>	✓	
Marble	✓				✓			✓	
Glass materials		~							
Volcanic stone					✓			✓	
Slate		✓					✓	~	~
Ceramic roof tile	✓				✓			~	
Concrete roof tiles					✓			~	
Glazed roof tile	✓				✓				
Calcareous terrazzo					✓			✓	
Siliceous terrazzo							<u> </u>	✓	
Concrete pipe					✓			✓	



























DRILLING

Tools for drilling ceramic tile, stoneware, marble, granite and other materials.







(o)

XX



- Tungsten Carbide bits for drilling Wall tiles.
- Adaptable to manual drill and head for electric drill without hammer.







- · Ref. 04993 drill bit with Tungsten Carbide tip for use with electric drill without hammer.
- · Attachable to all measures of Tungsten Carbide drill bits.
- · Sunnlied in hlister

sapplied in bilsten		
	REF	
IEAD WITH CENTRAL ATTACHMENT DRILL BIT	04992	1

TUNGSTEN CARBIDE DRILL BIT







• Tungsten carbide drill bits for wall tiles. Adaptable to manual drill and head for use with electric drill without hammer (ref. 04992).

	REF	\triangle	RPM				
DRILL BIT 1 3/8"	04962	PRO	800 max.	11/16"	5	780	
[35 MM.]	04702	FILU	UUU IIIAA.	18 mm	ر	700	
DRILL BIT 1	04964	nno	000	11/16"	5	700	
3/4"(45 MM.)	U4904	PRO	800 max.	18 mm	٥	780	
DRILL BIT 2 1/4"	04045	nno	000	11/16"		700	
(55 MM.) 04965		PRO	800 max.	18 mm	כ	780	

DRILL BIT SET WITH CASE





· It consists of head with central drill attachment and Tungsten Carbide drill bits of Ø 1", 1 3/8", 1 3/4", 1 3/4", 2 1/2", 2 3/4" and 3 1/4" (27, 35, 45, 55, 65, 70 and 85 mm), with plastic case.

	REF	\triangle		
DRILL BIT SET WITH CASE	04995	PRO	1	216





DIAMOND DRILL BITS - DRY CUT

 For dry drilling of Wall tiles, Floor tiles and Porcelain tiles.

KIT DRYGRES








- · The kit includes:
- · MULTIDRILL guide with suitcase.Ref.50917, Ref.50936, Ref.50996
- · Dry cutting diamond drill bits:
- · 01 1/8"[28mm],1 3/8"[35mm],1 3/4"[43mm]& 2 11/16"[68mm].
- · 01 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm),2"(50mm)&2 11/16"(68mm).
- · 01/4"[6mm],5/16"[8mm],3/4"[20mm],13/8"[35mm],50 &2 11/16"[68mm].

	REF				
KIT 4 BITS DRYGRES	GRES 50917 SUPERPRO 14000 m		1 7/16"	1	
כווא כוום 4 ווא	70717	JUPERPRU 14000 IIIax.	36 mm	1	
KIT 5 BITS DRYGRES	50936	SUPERPRO 14000 max.	1 7/16"	1	
רוואם כוום כ	01700	JUPERPRU 14000 IIIax.	36 mm	1	
KIT 6 BITS DRYGRES	50996	SUPERPRO 14000 max.	1 7/16"	1	
מוו ס מווט טאינעצבט	20776	SUPEKPKU 14000 Max.	36 mm	1	

DRYGRES DRILL BITS





- · For dry drilling in ceramic, porcelain, natural stone and other materials.
- · Maximum operating speed 14,000 r.p.m. M14 thread finish. Usable with grinder. Supplied in blister.

	REF	\triangle	RPM		
DRYGRES DRILL BIT Ø 1/4" (6 MM.)	05988	SUPERPRO	0 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 2/7" (7 MM.)	05994	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 5/16" (8 MM.)	05989	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 3/8" (10 MM.)	05990	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 1/2" (12 MM.)	05991	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 3/4" (20 MM.)	04910	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 1 1/8" (28 MM.)	04911	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 1 3/8" (35 MM.)	04912	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 1 3/4" (43 MM.)	04913	SUPERPRO	0 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 2" (50 MM.)	04914	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 2 3/8" (60 MM.)	04915	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 2 1/2" (65 MM.)	04916	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 2 11/16" (68 MM.)	04917	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
DRYGRES DRILL BIT Ø 3" (75 MM.)	05992	SUPERPRO) 14000 max.	1 7/16" 36 mm	1
MULTIDRILL GUIDE (MÁX. Ø 83 MM.)	50944	PRO	14000 max.	1 7/16" 36 mm	1

KIT MINI DRYGRES







- Dry cutting diamond drill bits for drilling porcelain tiles, glazed tiles, natural stone and other ceramics.
- They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Kit includes:
- Drill Ø 1/4"(6 mm), 5/16"(8 mm), 3/8"(10 mm) and 1/2"(12 mm).
- Case.

	REF				
KIT MINI DRYGRES	50938	SUPERPRO 14000 max.	1 7/16"	1	
בשטואט וואוואו ווא	30730	SUPERPRU 14000 IIIdx.	36 mm		

KIT TCR BLADE AND DRYGRES DRILL BITS







- · Kit includes:
- · Dry diamond cutting disc TCR-115.
- Four dry cutting diamond drill bits (2x6mm, 20mm, 35mm) [2x1/4", 13/16", 13/8"].

	REF	\triangle	
KIT TCR BLADE AND DRYGRES DRILL BITS	68923	SUPERPRO	1



#



































 \odot

XX

- · Designed for the fast drill of any kind of ceramic tiles including porcelain, but also suitable to drill natural stone as granite or marble, and sinthered stone.
- · Vacuum brazed type drill bits that provides a very fast dry drilling with very good quaility.
- · Resistant brazed of diamond grits and great quality materials for
- · Integrated wax only in the smallest diameters (6 12 mm) to help cooling and lubrication during drilling.
- · Side openings for better cooling due greater air circulation in biggest diameters (20 - 85 mm).
- · Air cooled through the own rotation but also recommended to describe small orbital movements with the tool to help cooling.

	REF	\triangle	RPM			
DRYGRES PREMIUM DRILL BITS	06900	PREMIUM	14000	1 3/16"	1	
Ø 6 MM.	00700	PKLIMIUM	14000	30 mm	1	
DRYGRES PREMIUM DRILL BITS	06915	PREMIUM	14000	1 3/16"	1	
0 7 MM.	00713	PREMIUM	14000	30 mm	1	
DRYGRES PREMIUM DRILL BITS	06918	PREMIUM	14000	1 3/16"	1	
0 8 MM.	00918	PREMIUM	14000	30 mm	1	
DRYGRES PREMIUM DRILL BITS	0/010 DDEMUM		14000	1 3/16"	1	
0 10 MM.	06919	PREMIUM	14000	30 mm	1	

	REF	\triangle	RPM		
DRYGRES PREMIUM DRILL BITS	06929	PREMIUM	14000	1 3/16"	1
Ø 12 MM.	00727	TILLITION	11000	30 mm	
DRYGRES PREMIUM DRILL BITS	06971	PREMIUM	14000	1 3/16"	1
Ø 20 MM.	00//1	FILLIVIIOIVI	14000	30 mm	
DRYGRES PREMIUM DRILL BITS	06972	PREMIUM	14000	1 3/16"	1
Ø 28 MM.	00772	PKLIVIIUIVI	14000	30 mm	
DRYGRES PREMIUM DRILL BITS	06973	PREMIUM	14000	1 3/16"	1
Ø 35 MM.	007/3	PREMIUM	14000	30 mm	1
DRYGRES PREMIUM DRILL BITS	06974	PREMIUM	14000	1 1/2"	1
Ø 43 MM.	009/4	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	06975	PREMIUM	14000	1 1/2"	1
Ø 50 MM.	007/3	PREMIUM	14000	38 mm	
DRYGRES PREMIUM DRILL BITS	06976	PREMIUM	14000	1 1/2"	1
Ø 60 MM.	007/0	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	06977	DDEMILIM	14000	1 1/2"	1
Ø 65 MM.	009//	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	0./070	DDEMILIA	1/000	1 1/2"	1
Ø 68 MM.	06978	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	07070	DDEMILIA	1/000	1 1/2"	
0 75 MM.	06979	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	0/000	DDEMUM	1/000	1 1/2"	1
0 85 MM.	06980	PREMIUM	14000	38 mm	1

KIT DRYGRES PREMIUM







NEW

- · The kit includes:
- · MULTIDRILL guide with suitcase.Ref.51931, Ref.51937, Ref.51929
- · Dry cutting diamond drill bits:
- · 01 1/8"[28mm],1 3/8"[35mm],1 3/4"[43mm]& 2 11/16"[68mm].
- · 01 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm),2"(50mm)&2 11/16"(68mm).
- · 01/4"[6mm],5/16"[8mm],3/4"[20mm],1 3/8"[35mm],50 &2 11/16"[68mm].

	REF	\triangle	RPM	
KIT 4 DRILL BITS DRYGRES PREMIUM	51931	PREMIUM	14000	1
KIT 5 DRILL BITS DRYGRES PREMIUM	51937	PREMIUM	14000	1
KIT 6 DRILL BITS DRYGRES PREMIUM	51929	PREMIUM	14000	1

KIT MINI DRYGRES PREMIUM







NEW

- · Dry cutting diamond drill bits for drilling porcelain tiles, glazed tiles, natural stone and other ceramics.
- · They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Kit includes:
- Drill 0 1/4"[6 mm], 5/16"[8 mm], 3/8"[10 mm] and 1/2"[12 mm].
- Case.

	REF	\triangle	RPM	
KIT MINI DRYGRES PREMIUM	51939	PREMIUM	14000	1



128









- · Specially designed for dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- · With high resistant welding of the diamond grains for a longer duration.
- · "Easy-Start" Without slipping. Suitable for work without a centering guide.
- · Perfect for cordless drills (1000 2500 rpm).
- · Reinforced body with grub screw for better performance and rigidity, thus maintaining the wax on the tip of the drill.
- · High quality finish.
- · designed to be used exclusively with either a cordless drill onr an electric drill.
- Their hexagonal connection allows them to adapt quickly to drills with a 10 mm chuck.

	REF			
DRYGRES DRILL BITS 4DRILL Ø 1/4" (6 MM.)	05923	SUPERPRO 1000 min.	1 7/16"	1
			36 mm 1 7/16"	
DRYGRES DRILL BITS 4DRILL Ø 5/16" (8 MM.)	05924	SUPERPRO 1000 min.	36 mm	1
DRYGRES DRILL BITS 4DRILL Ø 3/8" [10 MM.]	4DRILL 0 3/8" (10 MM.) 05926 SUPERPRO 1000 min.	1 7/16"	1	
טוונטונט טוונב טווט אטוונב ט טייט (נט ויווייונ)	03720		36 mm	
DRYGRES DRILL BITS 4DRILL Ø 1/2" (12 MM.)	05927	SUPERPRO 1000 min.	1 9/16"	1
			40 mm	
DRYGRES DRILL BITS 4DRILL 0 9/16" [14 MM.]	05928	SUPERPRO 1000 min.	1 9/16"	1
DATURES DATE DITS 4DATE & 77.10 (14 MIM.)	03720	JUPERPRO 1000 IIIII.	40 mm	1
DRYGRES DRILL BITS 4DRILL Ø 3/4" [20 MM.]	N5929	SUPERPRO 1000 min.	1 9/16"	1
טאזטאנט טאובר פווס אטאובר ש אַ אַ (צט אווייו.)	U3929		40 mm	1

- · For dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- · Hexagonal connection Compatible with battery drills.
- · Kit composed of:
- · DRYGRES 4DRILL diamond drills dry cut 0 6, 8, 10 and 12 mm.
- · With case.

	REF		
KIT DRYGRES 4DRILL	05939	SUPERPRO 1000 min.	1



#





















荁

XX

FORAGRES DRILL BITS 0 13/16" TO 4 3/4" [20 - 120 MM.]

EASY GRES DRILL BITS 07/32" TO 1/2" [6-12 MM.]









- The quality of the diamond allows the drilling of ceramics, porcelain, granite, marble and glass.
- · Ideal to install bathroom accessories and any type of decorative accessories over ceramic surfaces.
- · They must always be used with the EASY GRES guide which allows their adequate refrigeration ensuring a high accuracy and good results.
- \cdot Average life between 5 and 10 holes depending on the material.
- · Body made of steel and bit made of electrodeposited diamond.
- · Lateral opening to improve cooling of the drill bit and to allow the elimination of solid waste produced after the drilling of the hole.
- · Recommended speed of use between 400 and 1000 r.p.m. depending of the material to be drilled.
- · To achieve a better finish and a longer life of the drill bit, it's important to observe the adequate speed of use and to apply a moderate pressure during the drilling.
- · Supplied in blister.

	REF	\triangle	RPM			
EASY GRES DRILL BIT 7/32" (6 MM.)	04922	PRO	1000 max.	1" 25 mm	10	4600
EASY GRES DRILL BIT 1/4" (6.5 MM.)	04920	PRO	1000 max.	1" 25 mm	10	4600
EASY GRES DRILL BIT 5/16" (8 MM.)	04923	PRO	1000 max.	1" 25 mm	10	4600
EASY GRES DRILL BIT 3/8" (10 MM.)	04924	PRO	1000 max.	1" 25 mm	10	4600
EASY GRES DRILL BIT 1/2" (12 MM.)	04921	PRO	1000 max.	1" 25 mm	10	4600

DIAMOND DRILL BITS - WET CUT

· For wet drilling of Wall tiles, Floor tiles, Porcelain and other materials.

KIT FORAGRES







- · Kit includes:
- · MULTIDRILL Guide.
- · Tank and hose.
- Diamond drill bits 0 3/4", 1 1/8", 1 3/8", 1 3/4", 2" and 2 11/16" (0 20, 28, 35, 43, 50, 68 mm).
- · Case

	REF				
KIT FORAGRES	5nonz	SUPERPRO 900 max.	1 3/16"	1	
MII FURAURLO	70707	JUPERPRO 700 IIIax.	30 mm		



- · To drill floor tiles, porcelain tiles, granite and marble.
- · Always use cooled with water and non-hammer electric
- \cdot 0 1 5/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms. Supplied in blister.

	REF	\triangle	RPM		
FORAGRES DRILL BIT	04970	SUPERPRO	000 may	1 3/16"	1
3/4" (20 MM.)	047/0	JUPERPRU	700 IIIdX.	30 mm	
FORAGRES DRILL BIT 1	04971	SUPERPRO	000 may	1 3/16"	1
1/8" (28 MM.)	04971	JUPERPRU	700 IIIdX.	30 mm	1
FORAGRES DRILL BIT 1	04972	SUPERPRO	000 may	1 3/16"	1
3/8" (35 MM.)	04772	JUPLKPKU	700 IIIdx.	30 mm	
FORAGRES DRILL BIT 1	04963	SUPERPRO	000 may	1 3/16"	1
5/8" (40 MM.)	04703	JUPLKPKU	700 IIIax.	30 mm	1
FORAGRES DRILL BIT 1	04981	SUPERPRO	000 may	1 3/16"	1
3/4" [43 MM.]	04701	שני בוורווט	700 IIIax.	30 mm	1
FORAGRES DRILL BIT 2"	04973	SUPERPRO	000 may	1 3/16"	1
(50 MM.)	04773	JUPLKPKU	700 IIIax.	30 mm	
FORAGRES DRILL BIT 2	04974	SUPERPRO	000 may	1 3/16"	1
1/2" (65 MM.)	047/4	JUPERPRU	700 IIIdX.	30 mm	1
FORAGRES DRILL BIT 2	04918	CHUEDDOO	000 may	1 3/16"	1
11/16" (68 MM.)	U4710	SUPERPRO 900 max.		30 mm	1
FORAGRES DRILL BIT 3"	04975	SUPERPRO	000 may	1 5/16"	1
[75 MM.]	04773	JUPERPRU	700 IIIdX.	33 mm	1
FORAGRES DRILL BIT 4"	04976	SUPERPRO	/E0 may	1 3/16"	1
[100 MM.]	04970	JUPERPRU	430 IIIdX.	30 mm	1
FORAGRES DRILL BIT 4	04977	CIINEDNOO	/50 may	1 3/16"	1
3/4" [120 MM]	U49//	SUPERPRO 450 max.		3Ω mm	1







- \cdot The EASY GRES guide allows holes both vertically and horizontally, thanks to its functional design incorporating a water tank with flow control valve.
- The EASY GRES guide attaches easily to any surface, thanks to its renewable adhesives.

	REF		RPM			
EASY GRES DRILL BIT 7/32" (6	04927	PRO	1000	1"	10	800
MM.) SET	04727	PRU	max.	25 mm	10	000
EASY GRES DRILL BIT 5/16" (8	04928	PRO	1000	1"	10	800
MM.) SET	U4720	PRU	max.	25 mm	10	000
EASY GRES DRILL BIT 3/8" (10	0,4000	nnn	1000	1"	10	800
MM.) SET	04929	PRO	max.	25 mm	10	800
EASY GRES DRILL BIT 7/32"	N4919	PRO	1000	1"	10	800
AND 3/8" (6 AND 10 MM.) SET	04919	PKU	max.	25 mm	10	800
EASY GRES DRILL BIT 1/4" AND	04909	nnn	1000	1"	10	800
3/8" (6.5 AND 10 MM.) SET	04909	PRO	max.	25 mm	10	800
KIT EASY GRES BITS Ø 6,8,10	04904	PRO	1000	1"	10	
AND 12 MM .	U49U4	PKU	1000	25 mm	10	





- The quality of the diamond permits drilling stoneware, porcelain, granite, marble and glass.
- · Always use water-cooled.
- · The use of the MULTIDRILL guide (Ref. 50944) and the water tank (Ref. 50947) to cool and prevent movement of the drill bit during drilling getting good finishes.
- The working speed varies between 400 and 1000 r.p.m., depending on the material to be drilled.
- · Average life of 10 holes, depending on the material.
- · Body in steel and electroplated diamond tips.
- · Lateral opening for improved cooling and allow the removal of solid waste after each hole.
- · For a better finishing and longer bit life, it is important to respect the right speed and moderate pressure during drilling.
- · Supplied in blister.

	REF	\triangle	RPM		
EASY GRES DRILL BIT 3/4" (20 MM.)	05961	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 1 1/8" [28 MM.]	05962	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 1 3/8" (35 MM.)	05963	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 1 5/8" [40 MM.]	05964	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 1 3/4" [43 MM.]	05965	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 2" (50 MM.)	05966	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 2 1/4" (55 MM.)	05967	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 2 1/2" (65 MM.)	05969	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 2 11/16" (68 MM.)	05978	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 3" (75 MM.)	05979	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 4" (100 MM.)	05981	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 4 3/4" (120 MM.)	05982	PRO	500 max.	1 1/16" 27 mm	1



































RUBI

 \odot

XX

- · MULTIDRILL guide.
- · Water tank and hose.
- \cdot EASY GRES drills 0 3/4", 11/8", 13/8", 13/4", 2", 21/2" and 3" [20, 28, 35, 43, 50, 65 and 75 mm.] and case.

	REF	\triangle	RPM			
KIT EASY	50937	PRO	F00	1 1/16"	1	4.0
GRES PLUS	2072/	PKU	500 max.	27 mm	1	48

EASY GRES DRILL BIT 0 1 3/8 (35 MM.) SET



- · The kit includes:
- · MULTIDRILL guide.
- · Water tank and hose.
- · EASY GRES drill bit 0 1 3/8" (35 mm).

	REF	RPM			
EASY GRES DRILL BIT 0	50921	500 max.	1 1/16"	1	720
1 3/8" (35 MM.) SET	30721	JUU IIIdX.	27 mm		720

TANK FOR MULTIDRILL GUIDE





- · Bottle of 1200 ml. volume, with manual pressure pump.
- · Includes 2 m. hose.

	REF	\triangle	
TANK AND HOSE FOR MULTIDRILL GUIDE	50947	PRO	1

MULTIDRILL GUIDE





- · By fixing with suction cup, allows horizontal and vertical holes in the right place, preventing the drill bit from slipping.
- \cdot Compatible with dry cutting diamond drill bits, removable diamond drill bits 0 1/4" to 9/16" (6–14 mm) and wet cutting diamond drill bits 0 13/16" to 3" (20–75 mm).
- · Includes hose and tank connection (Ref. 50947).

	REF	\triangle	
MULTIDRILL GUIDE	50944	PRO	1

MULTIDRILL PLUS RM GUIDE



Cut & Drill



- By fixing the guide with the suction cup, allows horizontal and vertical holes in the correct place, preventing the drill bit from slipping on any type of surface: smooth, rough or slightly structured.
- · Compatible with all Rubi diamond drill bits, Ø 6 to 120 mm.
- · Metal centering guide for greater wear resistance.
- · Includes hose and tank connection (Ref. 50947).

	REF	\triangle	
MULTIDRILL PLUS GUIDE RM (MAX. Ø 120 MM)	51908	PRO	1

ELECTRIC DRILL ADAPTER





- \cdot For the use of dry cutting diamond drill bit with electric drill. (M14)
- · Use without hammer.

	REF	\triangle	
M14 ADAPTER FOR ELECTRIC DRILL	05976	SUPERPRO	1







<u></u>



DRILL BIT CHARACTERISTICS

		MATERIALS	0 MM	Ø INCH	REF	RPM	‡ мм	‡ ™ inch	USE	
			20 mm	3/4"	04970					
			28 mm	1 1/8"	04971					
			35 mm	1 3/8"	04972					
		Tile	40 mm	1 5/8"	04963		30 mm	1 3/16"	ELECTRIC DRILL Without percussion	
	Si	Ceramic tiles	43 mm	1 3/4"	04981	max. 900	וווווו טכ	13/10		
	FORAGRES	Porcelain tiles	50 mm	2"	04973					
	윤	Granite	65 mm	2 1/2"	04974				USE with Multidrill drilling guide/ MULTIDRILL PLUS RM. + Water	
		Marble	68 mm	2 11/16"	04918				tank and hose [Ref. 50944/51908 + 50947]	
			75 mm	3"	04975		33 mm	1 5/16"		
			100 mm	4"	04976	max.	30 mm	1 3/16"		
2			120 mm	4 3/4"	04977	450	70 111111	1		
BITS			6 mm	14/64"	04927					
DRILL			6,5 mm	1/4"	04925	Between 400 &			ELECTRIC DRILL Without percussion	
8			8 mm	5/16"	04928	1.000	25 mm	1"		
			10 mm	13/32"	04929	1000	10-			USE with Multidrill drilling guide + Water tank and hose (Ref. 50944 + 50947)
DIAMOND			12 mm	1/2"	04926					
A		Tile	20 mm	3/4"	05961					
		Ceramic tiles	28 mm	1 1/8"	05962					
	ES	Porcelain tiles	35 mm	1 3/8"	05963					
	EASYGRES	Granite	40 mm	1 5/8"	05964				ELECTRIC DRILL Without percussion	
	5		43 mm	1 3/4"	05965				***	
		Marble	50 mm	2"	05966	max.	27 mm	1 1/16"		
		Glass	55 mm	2 1/4"	05967	500	27 111111	1	USE with Multidrill drilling guide/ MULTIDRILL PLUS RM. + Water	
			65 mm	2 1/2"	05969				tank and hose (Ref. 50944/51908 + 50947)	
			68 mm	2 11/16"	05978				30747]	
			75 mm	3"	05979					
			100 mm	4"	05981					
			120 mm	4 3/4"	05982					





DRILL BIT CHARACTERISTICS

		MATERIALS	0 MM	Ø INCH	REF	RPM	‡ iii mm	‡ inch	USE
			6 mm	14/64"	06900				
			7 mm	1/4"	06915				
			8 mm	5/16"	06918				
			10 mm	13/32"	06919		30 mm	1 3/16"	
	⋝	Tile	12 mm	1/2"	06929		וווווו טכ	1	
	DRYGRES PREMIUM	Ceramic tiles	20 mm	3/4"	06971				- Children
	RE		28 mm	1 1/8"	06972	may			41
	S. P	Porcelain tiles	35 mm	1 3/8"	06973	max. 14.000			ELECTRIC DRILL Without percussion
	酱	Granite	43 mm	1 3/4"	06974				-
	RY	uranite	50 mm	2"	06975				MULTIDRILL GUIDE / MULTIDRILL PLUS RM
	_	Marble	60 mm	2 3/18"	06976				MULTIDRILL GUIDE / MULTIDRILL PLUS RM
			65 mm	2 1/2"	06977		38 mm	1 1/2"	
,			68 mm	2 11/18"	06978				
BITS			75 mm	3"	06979				
			85 mm	2 3/8"	06980				
DRILL			6 mm	14/64"	05988				
~			7 mm	1/4"	05994				
			8 mm	5/16"	05989				
DIAMOND		Tile	10 mm	13/32"	05990				
6			12 mm	1/2"	05991				
$\mathbf{\Sigma}$	и	Ceramic tiles	20 mm	3/4"	04910		36 mm	1 7/16"	
M	DRYGRES	Porcelain tiles	28 mm	1 1/8"	04911	max.			ELECTRIC DRILL Without percussion
	E	Fulceidill tiles	35 mm	1 3/8"	04912	14.000			ELLET NIC DNILL WILLIOUT PETCUSSION
	_	Granite	43 mm	1 3/4"	04913				-
			50 mm	2"	04914				
		Marble	60 mm	2 3/18"	04915				MULTIDRILL GUIDE / MULTIDRILL PLUS RM
			65 mm	2 1/2"	04916				
			68 mm	2 11/18"	04917				
			75 mm	3"	05992				
		Coating ceramics	6 mm	14/64"	05923		36 mm	1 7/16"	ELECTRIC PRILL Midden de accoursion
	폴	Ceramic tiles	8 mm	5/16"	05924				ELECTRIC DRILL Without percussion
	24[B	10 mm	13/32"	05926	min.			Cordless POWER DRILL
	뵕	Porcelain tiles	12 mm	1/2"	05927	1.000	40 mm	1 9/16"	
	DRYGRES 4DRILL	Natural Stone	14 mm	9/16"	05928				MULTIDRILL GUIDE / MULTIDRILL PLUS RM
		Piedra Artificial	20 mm	3/4"	05929				A THE STREET COST
	TS		35 mm	1 3/8"	04962				
TSI	CARBIDE DRILL BITS	Tile	45 mm	1 3/4"	04964	max.	18 mm	11/16"	ELECTRIC DRILL Without percussion
JNC A		HIE	55 mm	2 1/4"	04965	800	10 111111		Without percussion and adapter (Ref. 04992)
= c			85 mm	3 1/4"	04968				





























GRINDING & POLISHING

Grinding wheels and blades Blades and polishing pads











##





















GRINDING WHEELS




 \bigotimes

CONCRETE DOBLE ROW GRINDING CUP

- · Grinding cup with double row of sintered segments for grinding and edge finishing on concrete surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- · Maximum perimeter speed: 15.300 RPM (Ref. 05917) and 12.250 RPM (Ref. 05918).

	REF	\triangle	Ø	Ø			RPM	
GRINDING CUP WHEEL CONCRETE DOUBLE ROW 0100	05917	SUPERPRO	4" 100 mm	7/8" 22.2 mm	1/4" 6 mm	3/4" 19 mm	15300 max	1
GRINDING CUP WHEEL CONCRETE DOUBLE ROW 0125	05918	SUPERPRO	5" 125 mm	7/8" 22.2 mm	1/4" 6 mm	3/4" 19 mm	12250 max	1

CONCRETE FAN GRINDING CUP



- · Fan shaped grinding cup with sintered segments for fast grinding and edge finishing on concrete surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- · Maximum perimeter speed: 15.300 RPM (Ref. 05919) and 12.250 RPM (Ref. 05920)

	REF		\varnothing	\otimes			RPM		
GRINDING CUP WHEEL CONCRETE	N5919	SUPERPRO	4"	7/8"	3/16"	15/16"	15300	1	
FAN CUP 0100	03/1/	JUFLINFINU	100 mm	22.2 mm	5 mm	23.5 mm	max	1	
GRINDING CUP WHEEL CONCRETE	กรจวก	SUPERPRO	5"	7/8"	3/16"	15/16"	12250	1	
FAN CUP 0125	03720	JUPLKPKU	125 mm	22.2 mm	5 mm	23.5 mm	max	1	



STONE GRINDING CUP





- Turbo sintered grinding cup for grinding and edge finishing on natural stone surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- · Maximum perimeter speed: 15.300 RPM (Ref. 05919) and 12.250 RPM (Ref. 05920).

	REF	\triangle	Ø	Ø			RPM	
GRINDING CUP WHEEL TURBO	N5971	SUPERPRO	4"	0"	1/4"	3/4"	15300	1
STONE Ø100	03721	JUPLKPKU	100 mm	M14 mm	7 mm	19.5 mm	max	1


EPOXY-FIBRE GRINDING CUP





- · PCD grinding cup for fast removal of epoxy, paint, acrylics or other elastic coatings.
- · High frequency welding. Heavy-Duty steel core. Medium grinding finish.
- · For GRINDING use.
- · Maximum perimeter speed: 12.250 RPM

	REF	\triangle	\varnothing	Ø			RPM	
GRINDING CUP WHEEL EPOXY, FIBRE, PCD 0125	05922	SUPERPRO	5" 125 mm	7/8" 22.2 mm	1/16" 2 mm	7/16" 10.5 mm	12250 max	1

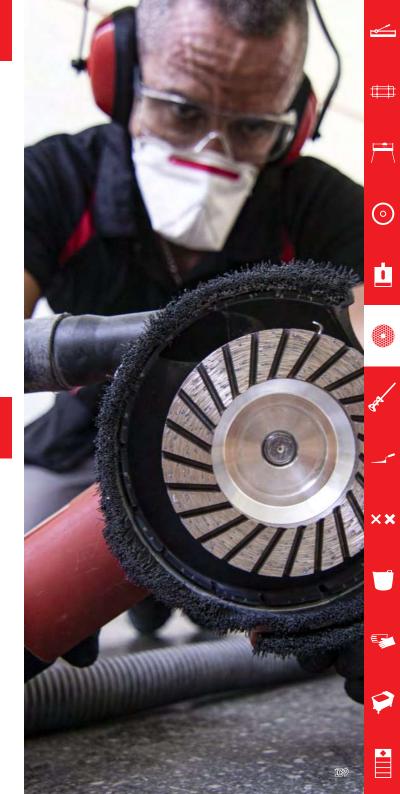







CUTTING & GRINDING BLADES



- · For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- · For adjustment cuts and grinding on all types of porcelain and hard materials.
- · For materials with <25 mm thickness.
- · Electroplated continous rim blade.
- · Two-sided and reversible blade for a better performance.
- · For grinders use. Connection: M14 thread.

	REF	\triangle	\oslash	\varnothing		٥		RPM		
ECD 115 21N1	31964	SUPERPRO	4 1/2"	0"	1/16"	1/4"	1"	13300	1	
SUPERPRO	31704	JOI LIVI IVO	115 mm	M14 mm	1.8 mm	5.6 mm	25 mm	max	1	
ECD 125 21N1	71045	SUPERPRO	5"	0"	1/16"	1/4"	1"	12250	1	
SUPERPRO	31965	ZUPERPRU	125 mm	M14 mm	1.8 mm	5.6 mm	25 mm	max	1	

GRINDING BLADES







- · VACUUM BRAZED embossed plate.
- · For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- · For GRINDERS use.
- · Maximum recommended speed: 15,300 RPM.
- · Fine grinding finish (Ref.31974).
- · Coarse grinding finish (Ref.31979).

	REF	\triangle	\varnothing	\varnothing			RPM	
VDF 100 FINE	31974	PRO	4"	7/8"	1/16"	7/8"	15300	1
PRO	J1774	PNU	100 mm	22.2 mm	2.1 mm	23 mm	max	1
VDG 100	31979	PRO	4"	7/8"	1/8"	7/8"	15300	1
COARSE PRO	317/7	PRU	100 mm	22.2 mm	2.4 mm	23 mm	max	





XX

(o)



BEVELING WHEELS

FINE GRAIN PRO-EDGER MITRING WHEEL



TURBO TWIST COARSE GRAIN PRO-EDGER MITRING WHEEL





##

(o)

<u>t</u>



- · Grinding wheel for mitring.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- \cdot 45° type tool with 1–2 mm edge.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

		REF	\triangle	\varnothing	\varnothing		RPM	
	45X20 FINE GRAIN PRO-FOGER	16946	SUPERPRO	3 11/16"	0"	13/16"	12000	5
	MITRING WHEEL	10740	JUFLINFINU	94 mm	M16 mm	20 mm	max.	
	45X15 FINE GRAIN PRO-FOGER	16985	35 SUPERPRO	3 5/16"	0"	9/16"	12000	
	MITRING WHEEL	10703		84 mm	M16 mm	15 mm	max.)



- · Grinding wheel for mitring.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- · The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-FDGFR

	REF	\triangle	\bigcirc	\varnothing		RPM	
45X15 TURBO TWIST COARSE GRAIN PRO-	16984	SUPERPRO	3 5/16"	0"	9/16"	12000	Е
EDGER MITRING WHEEL	10704	JUPERPRU	84 mm	M16 mm	15 mm	max.	

FINE GRAIN PRO-EDGER BEVELING WHEEL





- · Grinding wheel for bevelling.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 - 12000 rpm.
- · Round finish available on 5 and 10 mm radius.
- · Internal diameter: 16.1 mm (M16 thread).
- \cdot For exclusive use with PRO-EDGER.

	REF	\triangle	\bigcirc	\bigcirc	11111	RPM	
R.5 FINE GRAIN PRO-FDGER	16957	SUPERPRO	2 5/8"	0"	1/4"	12000	5
BEVELING WHEEL	10757	201 EIII IIO	66 mm	M16 mm	6 mm	max.	
R.10 FINE GRAIN PRO-FDGER	14050	SUPERPRO	3"	0"	7/16"	12000	5
BEVELING WHEEL	10730	JUPLKPKU	76 mm	M16 mm	11 mm	max.	٠,


































POLISHING PADS







- · It allows removing scratches and surface damage quickly and easily.
- · Maximum operating speed: 3,000 rpm.
- · Different granulometry.
- \cdot # 50, # 100 and # 200 for roughing.
- # 400, # 800, # 1500 and # 3000 polishing and close the pore.
- · VELCRO® fastening blade to holder ref. 62986.

	REF	\triangle	Ø	
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN # 50	62970	SUPERPRO 10	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #100	62971	SUPERPRO 10	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #200	62972	SUPERPRO 10	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #400	62973	SUPERPRO 10	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #800	62974	SUPERPRO 10	4" 00 mm	1
DIAMOND PADS DRY POLISHING Ø100 MM - GRAIN #1500	62975	SUPERPRO 10	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #3000	62976	SUPERPRO 10	4" 00 mm	1






PAD SUPPORT FOR POLISHING AND BUFFING









- · 0100 mm floppy disc for the final buffing, dry, of concrete, marble, granite and other ornamental natural stones.
- · Get a natural and long-lasting shine
- · Maximum operating speed: 3,000 rpm.
- · VELCRO® fastening blade to holder ref. 62986.

	REF	\triangle	\odot	
DRY DIAMOND POLISHING PAD 0100 MM BUFF BL.	62977	SUPERPRO	100	1



- · Fixing brackets for flexible polishing and buffing blades 0100 mm.
- · Compatible with jobs dry and water-cooled.
- · VELCRO fastening.
- · Connection polisher / grinder with M14 thread.

	REF	\triangle \varnothing	
SUPPORT FLOPPY PAD 0100MM	62986	SUPERPRO	1
M14	UZ 700	100 mm	1

MANUAL POLISHING PADS

MANUAL POLISHING PADS







- · Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.
- · Semi-flexible. Good adaptation to the user's hand.
- · Wet use is recommended.
- · Different grain sizes:
- \cdot # 60, # 120 and # 200 for roughing.
- \cdot # 400 for polishing.
- · Dimensions of the diamond plate: 55x90 mm.
- · Rubber pad dimensions: 58x94x30 mm.

	REF	\triangle	
DIAMOND POLISHING PAD GRAIN # 60	61974	SUPERPRO	10
DIAMOND POLISHING PAD GRAIN #120	61975	SUPERPRO	10
DIAMOND POLISHING PAD GRAIN #200	61976	SUPERPRO	10
DIAMOND POLISHING PAD GRAIN #400	61977	SUPERPRO	10





























MIXING

Electric mixers Mixing paddles








RUBIMIX E-10 ENERGY

For cementitious adhesives, resins, paints and other materials.







- 2 Powered by 18V 5Ah Li-lon battery.
- 3 Light and strong. Maximum reliability.
- 4 Dual bi-material grip handle. Better ergonomics, comfort and stability
- · Equipped with a 2 speed gearbox.
- · Progressive switch (RPM control) to optimise the mixing of each
- · Switch safety lock. Prevents unintentional start-up.
- · LED battery-charge indicator.
- · Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- · Double-insulated motor.
- · Ref. 26965 Includes: Mixer, Battery Charger, 1 battery and M-120-FI mixing paddle.

Accessories:
\$ Mixer Paddles FAST-IN 3HELIX
RUBIMIX buckets

















	REF	\triangle		5	RPM			
RUBIMIX E-10 ENERGY 18V CORDLESS MIXER	26965	PREMIUM	√	100-240V 5A 50-60Hz 1ª (0-420/ 2ª 0-700	19 Lb 8.6 kg	1	20
BATTERY ENERGY 18V 5AH	26966	PREMIUM					1	





##

























RUBIMIX-9 POWER MAX

Facilitates a homogeneous mixing of materials, avoiding the formation of bubbles and/or lumps.





- High power 2100W.
- Progressive regulator integrated in the handle's side (rpm regulation) to optimize the mixing of each material.
- 3 Equipped with 2 speeds gearbox (490/880
- Mixing paddles connection through exclusive RUBI FAST-IN head for fast paddle change.
- · Greater electrical safety thanks to double isolation.
- · Easy and intiutive use.
- · Attractive and functional design.
- · Ergonomic bi-material handle with improved grip that provides greater. Comfort & stability.
- · Chassis in technical plastic, light & resistant.
- · Maximum reliability & durability.
- · Anti-ignition security system. Prevents inadvertent start-up.
- · Soft start system.
- · 0140mm triple helix mixing paddle included (M14 thread continuous full rod) for mortar and cementitious adhesives.
- · Direct access to engine sbrushes for a fast and easy maintenance. Spare brushes and 19 & 22 mm keys included.
- · Available version with carrying case (ref.26981).
- · Compatible with drill holder and RUBI mixing paddles range.

Accessories
\$ Mixer Paddles FAST-IN 3HELIX
RUBIMIX buckets















	REF	\triangle		W	5			
RUBIMIX-9 POWER MAX	26980	PREMIUM		2100 W	230V/50-60Hz	16.5 Lb 7.5 kg	2	12
RUBIMIX-9 POWER MAX + CASE	26981	PREMIUM	√	2100 W	230V/50-60Hz	25.6 Lb 11.6 kg	2	12































RUBIMIX-9 SUPERTORQUE

Prepare

Facilitates homogeneous mixing of the materials and prevents the creation of bubbles and/or lumps.














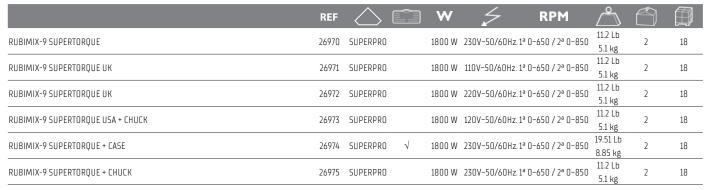

- Electric mixer with high torque.
- Progressive regulator integrated in the handle's side (rpm control) to OPTIMISE the mixing of each material.
- 3 Equipped with a mechanical 2 SPEED gearbox (450/780 rpm).
- Better electrical SAFETY thanks to its double insulation.
- · ATTRACTIVE and FUNCTIONAL Design.
- · Connection to mixing paddles with M14 thread.
- Double handle with bi-material grip providing better ERGONOMICS, COMFORT and STABILITY.
- · Chassis in TECHNICAL, LIGHT, and STRONG plastic. Maximum RFI IARII ITY AND DURABILITY
- · SAFETY on button. Prevents unintentional start-up.
- · Smooth start system.
- Direct access to the motor's brush housing for quick and easy maintenance
- Includes mixing paddle with 3 helixes of 140 mm diameter for mortars and cementitious adhesives.
- Option to couple a RUBI FAST-IN adapter for paddles (NOT included).
- · Includes brushes and 19 and 22 mm spanners.
- · Version available with transport case (ref. 26974).
- · Compatible with chucks and range of mixing paddles RUBI.

'	3 31
	Accessories
	Mortar Mixer M14 Thread 3 ZN-Zinc plated HELIX
8	Mortar mixer paddle Thread M14 3 HELIX
	RUBIMIX buckets































RUBIMIX-16 ERGOMAX

Innovative and ergonomic For cementitious adhesives, resins, paints and other materials.





- Handle adjustable in height. Ergonomics adaptable to each user.
- 2 Powerful 1600W motor for greater mixing capacity and high reliability.
- 3 New and improved handle. Comfort and stability.
- 4 Quick Connect System FAST-IN. Change rod without tools.
- · Electric mixer mortar powerful 1600 W.
- · Double insulation.
- \cdot Gearbox with 2 speeds (1st 0-430 rpm / 2nd 0-570 rpm).
- · Progressive switch (R.P.M. regulation).
- · 0 maximum of mixer 160 mm.
- · Mixer paddle Ø 140 mm. FAST-IN (5 9/16 ") included.
- · Thread Direct link for mixers with M14 finish.
- · Weight: 4.6 kg.
- · Electrical cable: 3 m.

	Accessories
A	Mixer Paddles FAST-IN 3HELIX
	RUBIMIX buckets













	REF	\triangle		W	5			
RUBIMIX-16 ERGOMAX 230V 50/60HZ	24994	SUPERPRO	-	1600 W	230V 50-60Hz.	10.1 Lb 4.6 kg	2	24
RUBIMIX-16 ERGOMAX 110V 50/60HZ UK	24995	SUPERPRO	-	1600 W	110V 50-60Hz.	10.1 Lb 4.6 kg	2	18
RUBIMIX-16 ERGOMAX 230V 50/60HZ UK	24996	SUPERPRO	-	1600 W	230V 50-60Hz.	10.1 Lb 4.6 kg	2	18
RUBIMIX-16 ERGOMAX 230V 50/60HZ W/CASE	24998	SUPERPRO	√	1600 W	230V 50-60Hz.	10.1 Lb 4.6 kg	2	24





XX


(o)


RUBIMIX-9 N

Proper

Versatility by changing the mixing paddle. For cementitious adhesives, resins, paints and other materials.







- 3 Quick and easy to change the brushes. High comfort.
- 4 Safety lock to prevent unexpected start.
- · Power: 1200 W.
- · Double insulation.
- · Direct connection M14 thread.
- Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). Ø maximum paddle: 140 mm.
- \cdot 0 4 3/4" (120 mm) mixing paddle included.

	Accessories
8	Mortar Mixer M14 Thread 3 ZN-Zinc plated HELIX
4	Plaster mixer paddle Thread M-14
8	Mortar mixer paddle Thread M14 3 HELIX
	RUBIMIX buckets









	REF		\triangle	W	5	RPM			
RUBIMIX-9 N	25940		SUPERPRO	1200 W	210-240V 50-60 Hz. 1	° 0-650 / 2° 0-850	12.1 Lb 5.5 kg	2	24
RUBIMIX-9 N UK	25942		SUPERPRO	1200 W	110-130V 50-60 Hz. 1	° 0-650 / 2° 0-850	12.1 Lb 5.5 kg	2	24
RUBIMIX-9 N UK	25944		SUPERPRO	1200 W	210-240V 50-60 Hz. 1	° 0-650 / 2° 0-850	12.1 Lb 5.5 kg	2	24
RUBIMIX-9 N + CHUCK	24986		SUPERPRO	1200 W	210-240V 50-60 Hz. 1	° 0-650 / 2° 0-850	12.3 Lb 5.6 kg	2	24
RUBIMIX-9 N USA + CHUCK	24949		SUPERPRO	1200 W	110-130V 50-60 Hz. 1	° 0-650 / 2° 0-850	12.3 Lb 5.6 kg	2	24
RUBIMIX-9 N + CASE	24958	√	SUPERPRO	1200 W	210-240V 50-60 Hz. 1	° 0-650 / 2° 0-850	17.2 Lb 7.8 kg	2	18



































0

Maximum performance with less effort. For cementitious adhesives and other materials.









Electronic control to optimize mixing.

ergonomics and comfort.

3 Double mixing paddle to increase work performance.

Bimaterial double grip handle. Improved

- Made of lightweight and durable materials for maximum reliability.
- · Power: 1350 W.
- · Double insulation.
- · 1 Speed and electronic regulator: 0-480 r.p.m.
- · 0 maximum paddle: 120 mm. x 2.
- · Mixers paddles of 0 4 3/4" included (120 mm).
- · M27 threaded connection.

Accessories Mortar mixer paddle DUPLEX (RUBIMIX-9 DUPLEX) RUBIMIX buckets











	REF	\triangle	W	5	RPM			
RUBIMIX-9 DUPLEX 230V 50/60HZ	25943	SUPERPRO	1350 W	210-240V 50-60 Hz.	0-480	15 Lb 6.8 kg	1	12
M-120 DUPLEX	25946	SUPERPRO					2	72





XX

ADAPTER FAST-IN THREAD







MIXING PADDLES FAST-IN

- · Adapter for use of the FAST-IN mixer paddles.
- · Transforms threaded connection M14x2 to quick connection system FAST-IN.
- · Adaptable to any mixer with M14x2 thread.

	REF	\triangle	
FAST-IN ADAPTER	76907	SUPERPRO	1

MIXER PADDLES FAST-IN 3HELIX








- · To mix cement mortars.
- \cdot Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- · Fast connection without tools FAST-IN.
- · Compatible with RUBIMIX-9 N PLUS, RUBIMIX E-10 ENERGY, RUBIMIX-16 ERGOMAX or FAST-IN (Ref. 76907) Adaptable to any mixer with M14x2 connection.

	REF	\triangle	******	Į]	Ē		
MIXER PADDLE M-100-	76941	SUPERPRO	33-44 Lb	21 5/8"	4"	,	
FI 3H	/0941	SUPERPRU	15-20 kg	550 mm	100 mm	6	
MIXER PADDLE M-120-	76942	SUPERPRO	33-55 Lb	24"	4 3/4"		
FI 3H	70942	SUPERPRU	15-25 kg	600 mm	120 mm	2	
MIXER PADDLE M-140-	76943	SUPERPRO	55-88 Lb	24"	5 1/2"	٦	84
FI 3H	70743	SUPERPRU	25-40 kg	600 mm	140 mm	2	84

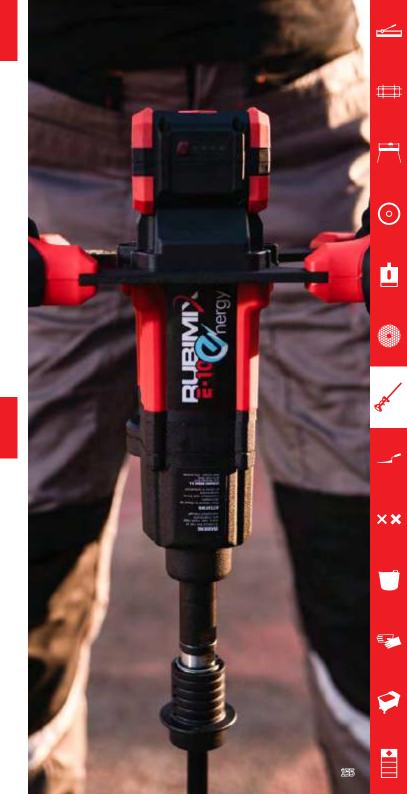



MIXING PADDLES

· Adaptable to RUBI mixers and other brands.



MORTAR MIXER M14 THREAD 3 ZN-ZINC PLATED HELIX



PLASTER MIXER PADDLE THREAD M-14





- · For mixing between 33.1 66.1 Lb. (15 25 kg.) of plaster.
- · M14 x 2 thread connection.
- · Adaptable directly RUBIMIX-9/9 PLUS and other brands.

	REF	\triangle		Į.	Ē	
PLASTER MIXER	72954	nnn	33-66 Lb	24"	4 5/16"	٦.
PADDLE P-120-R	72954	PRO	15-30 kg	600 mm	110 mm	

· For mixing cement-based mortars.

- · Mixing paddle with zinc treatment.
- Paddle head with 3 blades for more efficient mixing. 15% performance improvement compared to heads with two blades
- Reduces the effort for the electric mixer during the mixing process.
- · Generates less vibration. Increased comfort.
- · Connection by M14 x 2 thread.
- \cdot Can be adapted directly to RUBIMIX-9 N/ PLUS and other brands.

	REF	\triangle		Į.	Ĕ	
MORTAR MIXER PADDLE M-120-R	76971	PRO	33-55 Lb	24"	4 3/4"	
3H ZN	/07/1	PRU	15-25 kg	600 mm	120 mm	6
MORTAR MIXER PADDLE M-120-R 3H	76972	PRO	55-88 Lb	29 15/16"	4 3/4"	4
LONG ZN	10712	PRU	25-40 kg	760 mm	120 mm	6
MORTAR MIXER PADDLE M-140-R	76973	PRO	66-132 Lb	24"	5 1/2"	7
3H ZN	/07/3	PRU	30-60 kg	600 mm	140 mm	

MORTAR MIXER 3 HELIX







- · Helix head with 3 blades for higher efficient mixing.
- \cdot Adaptable to RUBIMIX portable range by chuck (Ref. 71967).

	REF		******	Į.	Ē		
MORTAR MIXER	76945	PRO	22-33 Lb	16"	3"	,	360
M-80 3H	/0743	PKU	10-15 kg	400 mm	80 mm	0	200
MORTAR MIXER	76946	nnn	33-44 Lb	21 5/8"	4"	,	
M-100 3H	/0940	PRN	15-20 kg	550 mm	100 mm	0	

























#

(o)

<u>t</u>

XX



- · Special mixing between 2.2 4.4 Lb. (1 2 kg) of epoxy
- · 8 mm hexagonal finish.
- · Adaptable to RUBIMIX-9/9 PLUS by chuck (Ref. 71967).

	REF	\triangle	******	Į]	Ē	
EPOXY MIXER	65939	PRO	2-11 Lb	16"	3"	,
PADDLE E-80	75650	PKU	1-5 kg	400 mm	80 mm	0



- · To mix all materials.
- · 10 mm hexagonal finish.
- · Adaptable to RUBIMIX-9/9 PLUS by chuck (Ref. 71967).

	REF		******	Į.	Ē		
STANDARD MIXER	65931	nno	22-33 Lb	20 1/2"	4 5/8"		
PADDLE ML-120	00751	PRO	10-15 kg	520 mm	118 mm		

\cdot To mix cement mortars.

- · Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- · M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX-9/9 PLUS and other brands.

	REF	\triangle	******	Į]	Ĕ	
MORTAR MIXER	76917	PRO	33-44 Lb	21 5/8"	4"	,
PADDLE M-100-R 3H	/091/	PKU	15-20 kg	6		
MORTAR MIXER	76918	PRO	33-55 Lb	24"	4 3/4"	7
PADDLE M-120-R 3H	/0918	PKU	15-25 kg	600 mm	120 mm	2
MORTAR MIXER	76919	PRO	55-88 Lb	24"	5 1/2"	٦
PADDLE M-140-R 3H	70919	PKU	25-40 kg	600 mm	140 mm	2
MORTAR MIXER	76940	PRO	66-132 Lb	24"	6"	7
PADDLE M-160-R 3H	/0740	PKU	30-60 kg	600 mm	160 mm	2

LIQUID MIXER PADDLE -HEXAGONAL ROD



- · To mix liquid and low density materials.
- · Adaptable to RUBIMIX-9/9 PLUS by chuck (Ref. 71967).

	REF	\triangle	******	Į]	Ē		
LIQUID MIXER	65933	PRN	11-33 Lb	16"	3"	4	467
PADDLE L-80	00700	PRU	5-15 kg	400 mm	80 mm	6	402
LIQUID MIXER	65934	PRN	33-55 Lb	21 5/8"	4"	,	
PADDLE L-100	00704	PKU	15-25 kg	550 mm	6		

MORTAR MIXER PADDLE DUPLEX (RUBIMIX-9 DUPLEX)





- \cdot To mix up to 66.1 110.2 Lb. (30 50 kg) of glue mortar. M27 x 1,5 thread finish.
- · Fits directly to RUBIMIX-9 DUPLEX.

	REF	\triangle	******	Į.	Ē		
M-120 DUPLEX	25946	SUPERPRO	66-110 Lb 30-50 kg	22 7/16"	4 3/4"	1	77
PADDLE (2 UN.)	23740	JUPERPRU	30-50 kg	570 mm	120 mm	1	12



- Rubber Bucket 65 I. Spare RUBIMIX–50–N and also for use with RUBIMIX–9/9 PLUS and 9 DUPLEX.
- Rubber Bucket 40 I. Spare RUBIMIX-25-N and also for use with RUBIMIX-9/9 PLUS and 9 DUPLEX.

	REF	\triangle	
BUCKET FOR RUBIMIX-50-N	60202	PRO	1
BUCKET FOR RUBIMIX-25-N	60265	PRO	1





- · Chuck attachable to the entire RUBIMIX range to work with hexagonal and round finishing rods below 12mm.
- · Includes chuck key S2 Ref. 71969.

	REF	\triangle		
СНИСК	71967	SUPERPRO	1	
CHUCK KEY	71969	SUPERPRO	10	3600

UPWARDS MOTION : The material rises through the inner section of the mixing paddle and falls on the outside. This motion allows for an homogeneous mixture of viscous materials such as mortar, cement, glue, etc. Less effort and easier use.	M-120-R 3H ZN M-120-R 3H L ZN M-140-R 3H ZN M-80 3H M-100 3H	M-100-R 3H M-120-R 3H M-140-R 3H M-160-R 3H M-100-FI 3H M-120-FI 3H M-140-FI 3H
PARALLEL MOTION : The mixture is done horizontally so the materials flow in both directions (up/down) depending on the movement of the paddle. This motion is recommended for resines, bicomponents, liquids, etc. It reduces the aumount of bubbles and lumps.	E-80 ML-120 P-120-R	
DOWNWARD MOTION : The material is pulled through the paddle's head and rises through the exterior. This motion is recommended for materials with a low viscosity such as paint, sealers, plaster, etcThe lumps are dissolved without splashing.	L-80 L-100	
COUNTER MOTION : Both paddles work simultaneously generating a more intense mixture. Recommended for resilient and viscous materials such as mortars. Only for dual- paddle mixers.	M-120 DUPLEX	

##

⊙

t

XX

MIXER TABLE

		REF	к к к к к к к к к к к к к к к к к к к	LB	RPM	w w	MM \$	INCH	мм	INCH		MM/INCH	
M-120-R 3H ZN		76971	15 - 25 kg	33.1 - 55.1 Lb	300 - 500	950	600	23 5/8"	120 mm	4 3/4"			
M-120-R 3H L ZN		76972	25 - 40 kg	55.1 - 88.2 Lb	000 - 000	950	760	2915/16"	120 111111	4-57 .		M14	x 2
M-140-R 3H ZN		76973	30 - 60 kg	66.1 - 132.3 Lb	200 – 400	1200	600	23 5/8"	140 mm	5 9/16"			
M-80 3H		76945	10 - 15 kg	22 - 33.1 Lb		500	400	15 ^{3/4} "	80 mm	3 3/16"		8 mm	5/16"
M-100 3H		76946	15 7014	33.1 - 44.1 Lb	300 - 500	700	550	21 11/16"	100 mm	L"		10 mm	13/32"
M-100 R 3H	_	76917	15 - 20 kg	33.1 - 44.1 LU	200 - 200	700	טככ	21 11/10	100 11111	4"		M14 x 2	
M-120 R 3H	-	76918	15 - 25 kg	33.1 - 55.1 Lb		950			120 mm	4 3/4"			
M-140 R 3H		76919	25 - 40 kg	55.1 - 88.2 Lb	200 -400	1200	600	23 5/8"	140 mm	5 9/16"			
M-160 R 3H		76940	30 - 60 kg	66.1 - 132.3 Lb		1500			160 mm	6 5/16"			
M-100 FI 3H		76941	15 - 20 kg	33.1 - 44.1 Lb	700 500	700	550	21 11/16"	100 mm	4"		FAST-IN	
M-120 FI 3H		76942	15 - 25 kg	33.1 - 55.1 Lb	300-500	950	/00	23 5/8"	120 mm	4 3/4"			
M-140 FI 3H		76943	25 - 40 kg	55.1 - 88.2 Lb	200-400	1200	600	25 3/10	140 mm	5 9/16"			
E-80		65939	1-5 kg	2.2 - 11 Lb	300 - 500	700	400	15 ^{3/4} "	80 mm	3 3/16"		8 mm	5/16"
ML-120		65931	10 - 15 kg	22 - 33.1 Lb		700	520	20 1/2"	118 mm	4 5/8"		10 mm	13/32"
L-80	_	65933	5 - 15 kg	11 - 33.1 Lb	300-600	400	400	15 3/4"	80 mm	3 3/16"		8 mm	5/16"
L-100	-	65934	15 - 25 kg	33.1 - 55.1 Lb		500	550	21 11/16"	100 mm	4"		10 mm	13/32"
P-120 R		72954	15 - 30 kg	33.1 - 66.1 Lb	300 - 500	950	600	23 5/8"	110 mm	4 5/16"		M14	· x2
M-120 DUPLEX		25946	30 - 50 kg	66.1 - 110.2 Lb	480	1350	570	22 7/16"	120 mm	4 3/4"	(<u>)</u>	M27	x 1,5

















mixed



finish



finish







Liquids





Epoxi

resin



##





























TOOLS FOR FIXING TILES AND FINISHINGS

Trowels, notched trowels, floats, rubber trowels and spatulas Markers, chisels, templates and auxiliary tools for tiling Mallets, Nippers and Grout Mortar Applicators








荁

(o)

<u>†</u>

XX

SELECTION TABLE

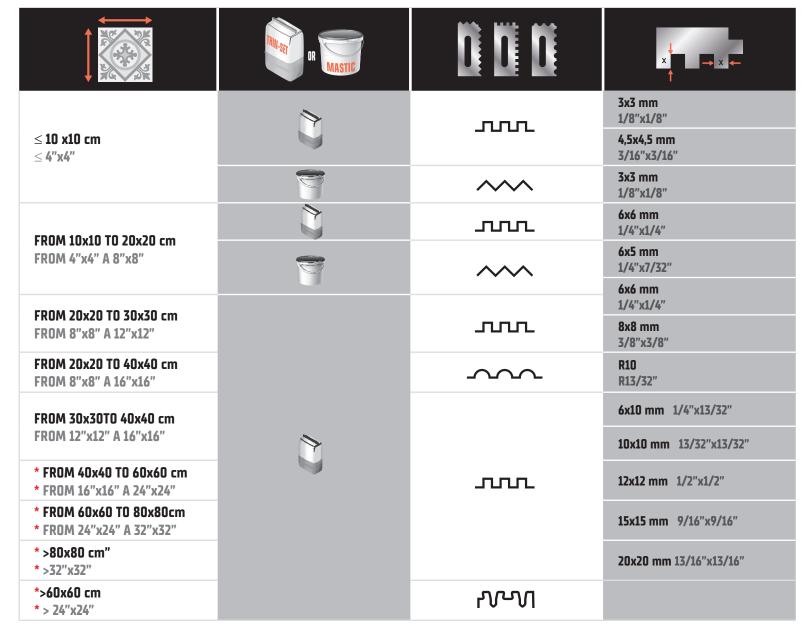

Basic conditions:

≥80% Adhesive coverage (dry indoor surfaces). Final layer thickness: 5 mm (3/16 °). BACK BUTTERING is not required.

*Back buttering is mandatory when the required coverage is ≥95% (for outdoors or damp areas) or pieces larger than 40 x 40. (16"x16"). To compensate for the bowing of the tile, add 2x** to the tooth size (** = deformation in the flatness of the tiles).





TROWELS AND NOTCHED TROWELS

			WOO	DEN HAN	IDLE		RUBIFLEX					PLASTIC HANDLE		
	:	L	7		3 .		Æ	3 .				_	7	
			INOX		INOX			INOX		INOX	45°			
		65950	65960	65988	72915	71922	75950	75970	72917	72919		65951	25900	
	SHARP		74948											
	3 x 3 mm 1/8 x 1/8"	65989				71923			72906	74936		65965	25901	
	4,5 x 4,5 mm 3/16 x 3/16"								74980	74937			25902	
	6 x 6 mm 1/4 x 1/4"	65982		65958		71924	75955		72907	74938	75946	65966	25903	
n	6 x 10 mm 1/4 x 13/32"								74981					
	8 x 8 mm 3/8 x 3/8"	65984		65959		71925	75957		72908	74940	75947	65967	25905	
-1	10 x 10 mm 13/32 x 13/32"	65985		65983		71926	75958		72909	74941	75948	65968	25906	
	12 x 12 mm 1/2 x 1/2"	74947		73973			75959			74942	75923		25907	
	15 x 15 mm 9/16 x 9/16"									76947				
	20 x 20 mm 13/16 x 13/16"			75962										
	R10			65987					72910	74943	75924			
***	3 x 3 mm 1/8 x 1/8"					71927								
	6 x 5 mm 11/4 x 7/32"								72911					
	6 x 6 mm 1/4 x 1/4"					71928								
	YW								77923					





















































##
























- · Steel plate special high wear resistance with corrosion protection by clear coat. (STEEL).
- · Stainless steel plate special high wear resistance (INOX).

		,					
	REF	\triangle	H	III	J-J-		
STEEL TROWEL 12" (30 CM.)	65950	SUPERPRO	-	-	-	6	624
INOX TROWEL 12" (30 CM.)	65960	SUPERPRO	-	-	-	6	480
SHARP EDGED INOX TROWEL 12" (30 CM.)	74948	SUPERPRO	-	-	-	6	-
STEEL NOTCHED TROWEL 11" (28 CM.) 1/8 X 1/8"(3 X 3 MM.)	65989	SUPERPRO	1/8" 3 mm	1/8" 3 mm	-	6	624
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4 X 1/4" (6 X 6 MM.)	65982	SUPERPRO	1/4" 6 mm	1/4" 6 mm	-	6	624
STEEL NOTCHED TROWEL 11" (28 CM.) 3/8 X 3/8" (8 X 8 MM.)	65984	SUPERPRO	5/16" 8 mm	5/16" 8 mm	-	6	624
STEEL NOTCHED TROWEL 11" (28 CM.) 13/32 X 13/32" (10 X 10 MM.)	65985	SUPERPRO	3/8" 10 mm	3/8" 10 mm	-	6	624
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2" X 1/2" (12 X 12 MM.)	74947	SUPERPRO	1/2" 12 mm	1/2" 12 mm	-	6	624

19"[48CM] TROWELS & NOTCHED T. CLOSED WOOD HANDLE





- · Stainless steel plate special high wear resistance (INOX)
- · Perfect flatness of the plate.
- \cdot The notches 13/16" x 13/16" (20 x 20 mm.) developed for dosing of glue mortar on uneven floors. Allows more material thickness.

REF	\triangle	- H	пп	J-J-		
65988	SUPERPRO	-	-	-	6	360
72915	SUPERPRO	-	-	-	6	360
65958	SUPERPRO	1/4"	1/4"	_	6	360
	JOI EN NO	6 mm	6 mm			200
65959	SIIDERDRO	5/16"	5/16"	_	6	360
7777	JOI ENI NO	8 mm	8 mm			200
45007	CIINEDNDO	3/8"	3/8"	_	4	360
0.770	JUPLKPKU	10 mm	10 mm	_	U	200
77077	CIIDEDDDD	1/2"	1/2"			360
/37/3	JUPERPRU	12 mm	12 mm	-	0	300
75047	CIINEDNDO	13/16"	13/16"	_	4	360
1 1702	JUPLKPKU	20 mm	20 mm		u	טטר
	65988	65988 SUPERPRO 72915 SUPERPRO 65958 SUPERPRO 65959 SUPERPRO 65983 SUPERPRO 73973 SUPERPRO	65988 SUPERPRO - 72915 SUPERPRO - 65958 SUPERPRO 1/4" 6 mm 65959 SUPERPRO 8 mm 65983 SUPERPRO 3/8" 10 mm 73973 SUPERPRO 1/2" 12 mm 75962 SUPERPRO 13/16"	65988 SUPERPRO - - 72915 SUPERPRO - - 65958 SUPERPRO 1/4" 1/4" 6 mm 6 mm 6 mm 6 mm 65959 SUPERPRO 8 mm 8 mm 65983 SUPERPRO 3/8" 3/8" 10 mm 10 mm 10 mm 73973 SUPERPRO 1/2" 1/2" 12 mm 12 mm 13/16" 13/16"	65988 SUPERPRO	65988 SUPERPRO 6 72915 SUPERPRO 6 65958 SUPERPRO 1/4" 1/4" - 6 65959 SUPERPRO 5/16" 5/16" - 6 65959 SUPERPRO 3/8" 3/8" - 6 65983 SUPERPRO 3/8" 3/8" - 6 73973 SUPERPRO 1/2" 1/2" 1/2" - 6 75962 SUPERPRO 13/16" 13/16" - 6









#



























- · Levelling trowels wood handle.
- · Special high wear resistant steel plate.
- Plate measures:15 3/4"x4 11/32"[40 x 11 cm].

	REF	\triangle		
LEVELLING TROWEL ROUND TIP	60996	SUPERPRO	2	288
LEVELLING TROWEL POINTED TIP	60997	SUPERPRO	2	288

TROWELS & NOTCHED T. CLOSED RUBIFLEX HANDLE





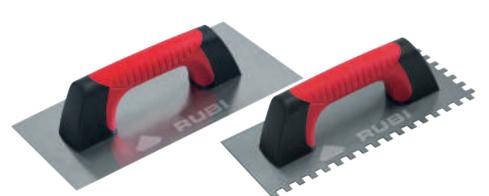

- · Steel plate special high wear resistance with corrosion protection by clear coat (STEEL).
- · Stainless steel plate high wear resistance (INOX).
- · Ergonomic RUBIFLEX handle with two textures.
- · Perfect flatness of the plate.

	REF	\triangle	L H	TIE	J-J-		
STEEL TROWEL-12" [30 CM.]	75950	SUPERPRO	-	-	-	6	-
INOX TROWEL 12" (30 CM.)	75970	SUPERPRO	-	-	-	6	-
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	75955	SUPERPRO	1/4" 6 mm	1/4" 6 mm	-	6	624
STEEL NOTCHED TROWEL 11" (28CM) 3/8"X3/8" (8X8 MM.)	75957	SUPERPRO	5/16" 8 mm	5/16" 8 mm	-	6	624
STEEL NOTCHED TROWEL 11" (28CM) 1/2"X1/2" (10X10 MM.)	75958	SUPERPRO	3/8" 10 mm	3/8" 10 mm	-	6	624
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	75959	SUPERPRO	1/2" 12 mm	1/2" 12 mm	-	6	263



RUBI























- · Extremely light and resistant aluminium core.
- The connection between core and plate is very rigid.
- · Highly wear-resistant special steel sheet with protection against corrosion by means of colourless varnish (STEEL).
- \cdot Special stainless steel sheet with high wear resistance (SS).
- · RUBIFLEX ergonomic handle with two textures.
- · Perfect blade flatness.
- · YW notched trowel (Ref.77923), with a distinctive and unique shape of notches (not rectangular) to achieve optimal wetting (near 100%) of the tile with the adhesive. Specially created for tiles for which wetting is key (large tiles),
- · and works very well with large format and SLAB type tiles.

		REF	\triangle	H	ПП	HE		
	INOX TROWEL 11" (28 CM.)	72919	SUPERPRO	-	-	-	6	270
	STEEL NOTCHED TROWEL 1/8"X1/8" (3X3 MM.)	72906	SUPERPRO	1/8" 3 mm	1/8" 3 mm	-	6	270
	INOX NOTCHED TROWEL 11" [28 CM.] 1/8"X1/8" [3X3 MM.]	74936	SUPERPRO	1/8" 3 mm	1/8" 3 mm	-	6	270
	STEEL NOTCHED TROWEL 11" [28 CM.] 3/16"X3/16" [4.5X4.5 MM.]	74980	SUPERPRO	3/16" 4.5 mm	3/16" 4.5 mm	-	6	270
	INOX NOTCHED TROWEL 11" [28 CM.] 3/16"X3/16" [4.5X4.5 MM.]	74937	SUPERPRO	3/16" 4.5 mm	3/16" 4.5 mm	-	6	270
	STEEL NOTCHED TROWEL 11" [28 CM.] 1/4"X1/4" [6X6 MM.]	72907	SUPERPRO	1/4" 6 mm	1/4" 6 mm	-	6	270
	INDX NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	74938	SUPERPRO	1/4" 6 mm	1/4" 6 mm	-	6	270
	STEEL NOTCHED TROWEL 11" [28 CM.] 3/8"X3/8" [8X8 MM.]	72908	SUPERPRO	5/16" 8 mm	5/16" 8 mm	-	6	270
	INDX NOTCHED TROWEL 11" (28 CM.) 3/8"X3/8" (8X8 MM.)	74940	SUPERPRO	5/16" 8 mm	5/16" 8 mm	-	6	270
,	STEEL NOTCHED TROWEL 11" [28 CM.] 13/32"X13/32" [10X10 MM.]	72909	SUPERPRO	3/8" 10 mm	3/8" 10 mm	-	6	270
	INOX NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	74941	SUPERPRO	3/8" 10 mm	3/8" 10 mm	-	6	270
	STEEL NOTCHED TROWEL 11" [28 CM.] 1/2"X1/2" [12X12 MM.]	74982	SUPERPRO	1/2" 12 mm	1/2" 12 mm	-	6	288
	INOX NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	74942	SUPERPRO	1/2" 12 mm	1/2" 12 mm	-	6	270
	INOX NOTCHED TROWEL 11" (28 CM.) 9/16"X9/16" (15X15 MM.)	76947	SUPERPRO	9/16" 15 mm	9/16" 15 mm	-	6	-
	STEEL NOTCHED TROWEL 11" (28 CM.) R-13/32" (10 MM.)	72910	SUPERPRO	-	-	3/8" 10 mm	6	270
	STEEL NOTCHED TROWEL TRIANGULAR 1/4"X7/32" (6X5 MM.)	72911	SUPERPRO	1/4" 6 mm	3/16" 5 mm	3/16" 5 mm	6	270
	STEEL NOTCHED TROWEL 28 CM. YW	77923	SIIPERPRO	1/4 / 1/2"	5/16 / 1/4" 8 / 7 mm	-	6	-

45° NOTCHED TROWEL RUBIFLEX OPEN HANDLE







- 45° Angled notches for comfort and less user effort. Improves adherence of the mortar on to work surface.
- · Special carbon steel alloy plate of high wear resistance.
- · Extremely light, high resistance aluminium reinforcement.
- · Highly rigid joint betwwen the reinforcement and the plate.
- · Ergonomic RUBIFLEX handle with two textures.
- · Clear coat for protection against corrosion.
- · Perfect flatness of the plate.

	REF	\triangle	H	TITE	J-J-E		
45° NOTCHED TROWEL 11" (28 CM) 1/4"X1/4" (6X6)	75946	SUPERPRO	1/4"	1/4"		6	480
43 NOTCHED INDIVIDE IT (20 CM) 1/4 X1/4 (0X0)	73740	JUPLKPKU	6 mm	6 mm	-	U	400
45° NOTCHED TROWEL 11" (28 CM) 3/8"X3/8" (8X8)	75947	SUPERPRO	5/16"	5/16"		6	480
45" NUICHEU IKUWEL II (28 CM) 5/8 X5/8 (8X8)	13741	JUPLKPKU	8 mm	8 mm	-	0	480
45° NOTCHED TROWEL 11" (28 CM) 13/32"X13/32" (10X10)	75948	SUPERPRO	3/8"	3/8"		,	480
45" NUTCHED TRUWEL II (28 CM) 15/32 X15/32 (1UX1U)	/3948	SUPERPRU	10 mm	10 mm	-	6	480
45° NOTCHED TROWEL 11" (28 CM) 1/2"X1/2" (12X12)	75077	SUPERPRO	1/2"	1/2"		,	4.00
45° NUTCHED I RUWEL II (28 CM) 1/2 X1/2 (12X12)	75923	SUPERPRU	12 mm	12 mm	-	6	480
45° NOTCHED TROWEL 11" (28 CM) R-13/32" (10 MM.)	75924	SUPERPRO			3/8"	,	4.00
45" NUTCHEU TRUWEL II (28 LM) R-15/32 (10 MM.)	/ 3924	SUPERPRU	-	-	10 mm	6	480

TROWELS & NOTCHED TROWELS CLOSED PLASTIC HANDLE





· Steel plate special high wear resistance with corrosion protection by clear coat.

	REF	\triangle		111	- J=		
STEEL TROWEL 12" (30 CM.)	65951	PRO	-	-	-	6	624
NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	65966	PRO	1/4" 6 mm	1/4" 6 mm	-	6	480
NOTCHED TROWEL 11" (28 CM.) 3/8"X3/8" (8X8MM.)	65967	PRO	5/16" 8 mm	5/16" 8 mm	-	6	480
NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	65968	PRO	3/8" 10 mm	3/8" 10 mm	-	6	480

























TROWELS OPEN PLASTIC HANDLE


























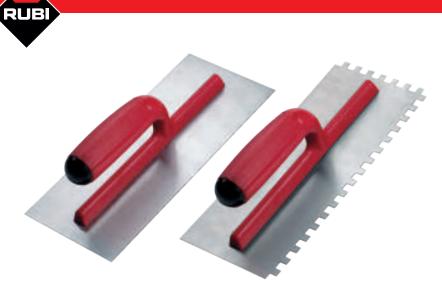

- \cdot Steel plate. Special high wear resistance.
- Plate trowel: 11" x 4" [28 x 12 cm].
 Plate notched trowel: 11" x 4" [28 x 12 cm].

	REF	\triangle	H	ПП	J-J-		
STEEL TROWEL 11" (28 CM.) OPEN PLASTIC HANDLE	25900	PRO	-	-	-	6	720
STEEL NOTCHED TROWEL 11" (28 CM.) 1/8" X 1/8" (3 X 3 MM.)	25901	PRO	1/8" 3 mm	1/8" 3 mm	-	6	720
STEEL NOTCHED TROWEL 11" (28 CM.) 3/16" X 3/16" (4,5 X 4,5 MM.)	25902	PRO	3/16" 4.5 mm	3/16" 4.5 mm	-	6	720
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4" X 1/4" (6 X 6 MM.)	25903	PRO	1/4" 6 mm	1/4" 6 mm	-	6	720
STEEL NOTCHED TROWEL 11" (28 CM.) 5/16" X 5/16"(8 X 8 MM.)	25905	PRO	5/16" 8 mm	5/16" 8 mm	-	6	720
STEEL NOTCHED TROWEL 11" (28 CM.)3/8" X 3/8"(10 X 10 MM.)	25906	PRO	3/8" 10 mm	3/8" 10 mm	-	6	720
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2" X 1/2" (12 X 12 MM.)	25907	PRO	1/2" 12 mm	1/2" 12 mm	-	6	720





· Perfect adaption in shapes, sizes and specific characteristics meeting the demands of each market.





PFP05







































· Ergonomic RUBIFLEX.

	REF	\triangle	28	L	Å	
PFP01-120	75012	SUPERPRO	4 3/4"	2 7/8"	0.331 Lb	,
MM. [4 3/4"]	/5012	SUPERPRU	120 mm	73 mm	0.150 kg	6
PFP01-140	75017	SUPERPRO	5 1/2"	2 15/16"	0.348 Lb	,
MM. (5 1/2")	75014	SUPERPRU	140 mm	75 mm	0.158 kg	6



	REF	\triangle	28	S.		
PFP05-180	75418	SUPERPRO	7"	4 1/8"	0.628 Lb	
MM. (7 1/16")	/3410	JUPERPRU	180 mm	105 mm	0.285 kg	
PFP05-200	75420	SUPERPRO	8"	4 5/16"	0.703 Lb	,
MM. [7 7/8"]	75420	SUPERPRU	200 mm	110 mm	0.319 kg	0

PFM06





PFP10



PFP19



· Varnished beechwood handle.

	REF	\triangle	28	X.		
PFM06-180	75510	CHDEDDDO	7"	5 1/8"	0.745 Lb	,
MM. [7 1/16"]	35518	SUPERPRO	180 mm	130 mm	0.338 kg	Ď
PFM06-200	35520	SUPERPRO	8"	5 3/8"	0.794 Lb	,
MM. [7 7/8"]	33320	SUPERPRU	200 mm	137 mm	0.360 kg	0

· Ergonomic RUBIFLEX.

	REF	\triangle	28	L		
PFP10-130	75913	SUPERPRO	5 1/8"	2 3/4"	0.278 Lb	4
MM. (5 1/8")	/3713	SUPERPRU	130 mm	70 mm	0.126 kg	0

· Ergonomic RUBIFLEX.

	REF	\triangle	28	S	Å	
PFP19- 80	76808	SUPERPRO	4 5/16"	3"	0.335 Lb	4
MM. [4 5/16"]	/0808	SUPERPRU	109 mm	80 mm	0.152 kg	0
PFP19- 90	76809	SUPERPRO	5 1/16"	3 9/16"	0.37 Lb	,
MM. (5 1/16")	70809	SUPERPRU	128 mm	90 mm	0.168 kg	0

PFP22



PFM23

































6 5/8"

119 mm 0.359 kg

4 7/8"

184 mm 124 mm 0.370 kg

0.816 Lb





· Ergonomic RUBIFLEX handle.

	REF	\triangle	28	S		
PFP22-165	77116	SUPERPRO	6 5/8"	4 11/16"	0.807 Lb	6
MM. (6 5/8")	//110	JUPEKPKU	168 mm	119 mm	0.366 kg	6
PFP22-180	77118	SUPERPRO	7 1/4"	4 7/8"	0.981 Lb	4
MM. [7 1/4"]	//110	JUPERPRU	184 mm	124 mm	0.445 kg	0





	REF	\triangle	28	L	Å	
PFM23-180A	37258	CHDEDDDO	7 3/16"	4 5/8"	0.78 Lb	4
MM. (7 3/16")	3/238	SUPERPRO	183 mm	117 mm	0.354 kg	0



PFM22-165

MM. (6 5/8")

PFM22-180

MM. [7 1/4"]















	REF	\triangle	28	L			
PFP24-140	77314	SUPERPRO	5 1/2"	3 1/4"	0.34 Lb	6	
MM. (5 1/2")	77314	JUPLKPKU	140 mm	82 mm	0.154 kg	U	
PFP24-160	77316	SUPERPRO	6"	3 5/8"	0.337 Lb	6	
MM. (6 5/16")	//310	JUPEKPKU	160 mm	92 mm	0.153 kg	0	
PFP24-180	77318	SUPERPRO	7"	4 1/16"	0.58 Lb	,	
MM. (7 1/16")	//518	SUPERPRU	180 mm	103 mm	0.263 kg	6	
PFP24-200	77320	SUPERPRO	8"	4 5/16"	0.606 Lb	,	
MM. (7 7/8")	11320	SUPERPRU	200 mm	110 mm	0.275 kg	6	

· Ergonomic RUBIFLEX handle.

· Varnished beechwood handle. REF

37118 SUPERPRO







	REF	\triangle	28	S			
PFM24-140	37314	SUPERPRO	5 1/2"	3 1/4"	0.322 Lb	4	
MM. (5 1/2")	1/114	JUPLKPKU	140 mm	82 mm	0.146 kg	6	
PFM24-160	7771/	SUPERPRO	6"	3 5/8"	0.335 Lb	,	
MM. (6 5/16")	37316	SUPERPRU	160 mm	92 mm	0.152 kg	6	
PFM24-180	77710	CHDEDDDO	7"	4 1/16"	0.564 Lb		
MM. [7 1/16"]	37318	SUPERPRO	180 mm	103 mm	0.256 kg	6	



PFM26



PFP33



PFM55



#

(o)

t









· Ergonomic RUBIFLEX handle.



· Varnished beechwood handle.



· Ergonomic RUBIFLEX handle.



· Special for tile installers, sharp arrow.





- 1 Special white nylon lap for tapping without staining.
- Wooden handle in varnished beech.
- 3 Nickel-plated notched ring to increase handle fixation.
 - Solid, non-detachable mounting between handle and pin.
- 5 Fusion technique to forging temperature. Fully guaranteed for life against breakage
- **6** Perfect flatness of the entire plate.
- Plate protected against corrosion.
- **8** Fibres oriented lengthwise during plating.
 - Specific thermal treatment on:
 - Plate, to improve flexibility and prevent wear-off
 - Pin. to improve hardness and rigidness.
- Maximum lightness retaining its resistance.
- 10 Total regularity of all fabrications.
- 11 Perfect adaptation of shapes, sizes and specific characteristics of each market demands.



XX





(o)

RUBI BRICK TROWEL RANGE

mm 🕨	80	90	110	120	130	140	150	160	165	170	180	185	200
inch 🕨	3 5/32"	3 9/16"	4 11/32"	4 3/4"	5 1/8"	5 17/32"	5 24/32"	6 5/16"	6 1/2"	6 23/32"	7"	7 5/16"	7 7/8"
PFP01				75012		75014							
PFP05											75418		75420
PFM06											35518		35520
PFP10					75913		75913						
PFP19	76808	76809											
PFM20						36914							
PFM22							37115		37116		37118		
PFP22							77115		77116		77118		
PFM23											37258	37268	
PFP23											77258	77268	
PFM24						37314		37316			37318		
PFP24						77314		77316			37318		77320
PFP25											77418		
PFM26													37520
PFP33										79050			
PFP53			78211										
PFM54			38311										
PFM55						38414			38416				



FLOATS

· Plaster floats

RETICULATED POLYETHYLENE FLOATS





- · For finish floating mortar plastering.
- · Maximum ligthness and resistance to wear off.
- Very low water absortion. Guarantees dimensional stability.

	REF	\wedge	
	VEL	\longleftrightarrow	
POINT TIP POREX TROWEL 8 7/8" X 5 1/2" (24 X 14 CM)	83998	SUPERPRO	10
RECTANGULAR POREX TROWEL 8 7/8" X 5 1/2" (24 X 14 CM)	83999	SUPERPRO	10

POREX FLOATS





- · For plastering walls.
- · Density and hardness permits an even finish.

	REF	\triangle		
POINT TIP POREX TROWEL 9 1/2" X 5" (24 X 14 CM.)	83993	PRO	10	240
RECTANGULAR POREX TROWEL 9 1/2" X 5" (24 X 14 CM.)	83992	PRO	10	240

ROUGH PLASTIC HANDLE FLOATS





- · Reinforced plate of high resistance to abrasion and long durability.
- · Perfectly flat base.

	REF	\triangle		
POINT TIP FLOAT 10 X 5" (27 X 14 CM.)	71941	PRO	10	360
RECTANGULAR FLOAT 10" X 7" (27 X 18 CM.)	71943	PRO	10	240
RECTANGULAR FLOAT 13" X 9" (34 X 23 CM.)	71944	PRO	10	180

RUBBER GROUT FLOATS

- Rubber floats for grouting, with ergonomic or wooden handles.
- Available in different rubber to obtain the best finishing according to the joint width.

REPLACEABLE GROUT FLOAT PRO





- \cdot Grout Float (Ref.84924) with sheet resistant to abrasion.
- · Replaceable with space (ref 84925)

Replaceable With Spare (101.047)	۷۵٫۰		
	REF	\triangle	
REPLACEABLE GROUT FLOAT PRO	84924	PRO	6
SPARE GROUT FLOAT PRO	84925	PRO	15



#

(o)










































- · Available in different hardnesses of rubber for best finish as the joint width.
- medium hardness.

	REF	\triangle		
RUBBER GROUT FLOAT SUPERPRO	65970	SUPERPRO	6	540
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65976	SUPERPRO	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65975	SUPERPRO	6	540






GROUT FLOATS SUPERPRO PLASTIC





- · Plastic ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF	\triangle		
RUBBER GROUT FLOAT SUPERPRO	65971	SUPERPRO	6	540
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65973	SUPERPRO	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65972	SUPERPRO	6	540



- · Black foam rubber.
- · Grout Float PRO 9"x4" 22.5x10cm. (Ref.10607), with white rubber sheet wear resistant.

	REF	\triangle		
RUBBER GROUT FLOAT	10/07	DDO	,	70/
9"X4"X19/32" (22,5X10X1,5CM)	10607	PRO	6	384
GROUT FLOAT PRO 9 1/2"X4	74070	nnn	10	
3/4"X13/32" (24X12X1CM)	24968	PRO	10	
GROUT FLOAT PRO 11"X5"X13/32"	74070	PRN	10	7/0
[28X14X1CM]	24969	PKU	10	360



FLOATS AND TROWELS FOR PLASTER

 Trowels for and floats for the correct aplication and smoothing of plaster.

SPATULAS

 Great variety of spatulas for multiple purposes.

PLASTER FLOATS



FLEXIBLE PLASTER FLOATS





· Flexible polyethylene and nonstick base.

	REF	\triangle	
PLASTIC HANDLE FLOAT 12" X 5" (30 X 14 CM.)	71904	PRO	6



- · For multi finish and skimming plaster jobs (also compatible with microcement).
- · Ideal for vertical jobs in heights.
- · 1,2 mm thick polypropylene (PP) plate.

	REF	\triangle	
FLEXIBLE FINE PLASTIC HANDLE FLOAT	72824	SUPERPRO	6

WALL TILE GROUT SPATULA





· For filling joints.

REF		
65954	PRO	1
65935	PRO	1
	65954	65954 PRO

FLOOR TILE GROUT SPATULA





- · Reinforced spatula for professional jobs. Replaceable strip that can be used on both sides.
- · Includes grip and aluminium holder.

	REF	\triangle	
FLOOR TILE GROUT SPATULA 24" (60 CM.)	70905	SUPERPRO	1





































	REF	\triangle	
GENERAL PURPOSE SPATULA 17" (44 CM.)	65919	PRO	1
GENERAL PURPOSE SPATULA 24" (60 CM.)	70902	PRO	1

· Adaptable to floor tile grout spatula 50, 60 and 75 cm.

	REF	\triangle	
ALUMINIUM HANDLE	70904	SUPERPRO	1

· Holder for general purpose spatula of 44cm Ref.65919 and 60cm Ref.70902.

	REF	\triangle	
WOODEN HANDLE	65450	PRO	1

STAINLESS STEEL PAINT SPATULA RUBIFLEX HANDLE





 \cdot Stainless steel plate with ergonomic RUBIFLEX handle.

	REF	\triangle	
STAINLESS STEEL PAINT SPATULA 1" 5/8 [40 MM.]	73909	SUPERPRO	10
STAINLESS STEEL PAINT SPATULA 2" 1/2 (63 MM.)	73914	SUPERPRO	10
STAINLESS STEEL PAINT SPATULA 3" (75 MM.)	73911	SUPERPRO	10
STAINLESS STEEL PAINT SPATULA 4" (100 MM.)	73912	SUPERPRO	10
STAINLESS STEEL PAINT SPATULA 6" (150 MM.)	73913	SUPERPRO	10

XX

##

0

<u>t</u>

SCRAPERS

· Mortar scrapers, single layer, joints and plaster.

FACADE MORTAR SCRAPER 16" X 2 7/8" (50X72MM)





- · Facade mortar scraper with wooden handle.
- · Plate dimensions: 6x2 7/8" (150x72mm).

	REF	\triangle	
WOODEN HANDLE SCRAPER 6X2" 7/8 (150X72 MM.)	65963	SUPERPRO	6

FACADE MORTAR SCRAPER 10" X 5 3/4" [250X144MM]





- · Facade mortor scraper with two types of handles: Wood
- · plate dimensions 10" x 5 3/4" (250x144mm).

	-	-		
	REF	\triangle		
WOODEN HANDLE SCRAPER 10" X 5 3/4" (250X144 MM.)	72960	SUPERPRO	6	480
SPARE SCRAPER 10" X 5 3/4" (250X144 MM.)	65957	SUPERPRO	18	-
PLASTIC HANDLE SCRAPER 10" X 5 3/4" (250X144 MM.)	65962	SUPERPRO	6	480

ALUMINIUM PLASTER SCRAPER





- · Completely manufactured with aluminium, with 8 blades.
- · Dimensions 18" x 3 13/32" (455 x 86 mm).

	REF	\triangle		
ALUMINIUM PLASTER SCRAPER	72961	SUPERPRO	2 Lb 0.9 kg	1

JOINT SCRAPER





- · Ergonomic handle with two electroplated tungsten carbide plates with high resistance to abrasion.
- · Useable with 1, 2 or 3 plates depending on width of the joint.
- · Supplied in blister.

	REF	\triangle		
JOINT SCRAPER	65907	PRO	5	600
SPARE JOINT SCRAPER	71974	PRO	10	4600



































RUBISCRAPER-250

For grout removal without damaging the tile.









- 3 Blades made in tungsten carbide. Resharpenable for a greater performance. Patented model.
- Fast locking / unlocking system for easy assembly of blade.
- · Ideal for repair work (replacement of broken tiles).
- Equipped with 3 speeds. V1: 6500 i.p. / V2: 8000 i.p. / V3: 9500 i.p.
- · Power: 250 W.
- · Stroke length: 2 mm.
- · Double insulation.
- · Blades for joints of 1.5 mm (ref. 66810, use only with speed 1) and 3 mm (ref. 66812) included.
- · Includes 2 special blades (steel made) to remove rests of thinset from the back of the tiles or on the substrate.
- · With transport case.
- · Interchangeable blades for 1.5,2,3 and 4 mm joints.















	REF	\triangle \neq	W	
RUBISCRAPER-250	66940	SUPERPRO 230V-50Hz	250 W	1
RUBISCRAPER-250 UK	66941	SUPERPRO 230V-50Hz	250 W	1
RUBISCRAPER-250 USA	66942	SUPERPRO 120V-60Hz	250 W	1







##























· Resharpenable and easily interchangeable blades, available for 1.5mm (use only with speed 1), 2mm, 3mm and 4mm grout sizes.

	REF	\triangle	
1.5 MM (1/16") BLADE FOR RUBISCRAPER	66810	SUPERPRO	1
2 MM (3/32") BLADE FOR RUBISCRAPER	66811	SUPERPRO	1
3 MM (1/8") BLADE FOR RUBISCRAPER	66812	SUPERPRO	1
4 MM (5/32") BLADE FOR RUBISCRAPER	66813	SUPERPRO	1

MARKERS, SUPPORTS AND TEMPLATES

 Wide range of markers, supports and templates for the placement of tiles.

RULE SUPPORT SET





· For easy adjustment and levelling of the rule for wall tiling.

· In box of 2 units.

	REF	\triangle		
RULE SUPPORT SET 12" (30 CM.)	60991	SUPERPRO	1	207
RULE SUPPORT SET 20" (50 CM.)	60998	SUPERPRO	1	

RULE HOLDER NAILS











• Copies the shape of the areas which are awkward to mark onto tiles, for subsequent cutting. Maximum depth 4.5cm.

	REF	\triangle	
SHAPE TEMPLATE	70925	SUPERPRO	10


HOLE MARKER





- For marking the position of holes for tubing and electrical fitting, from the wall to the tile, for subsequent cutting or drilling.
- · Maximum length 26" (65cm).

R	REF		
HOLE MARKER XL 72	2953 5	SUPERPRO	6



	REF	\triangle		
RULE HOLDER NAIL 10" (250 MM.)	72941	SUPERPRO	6	



XX

(o)

MASTER LINE MARKER







STANDARD LINE MARKER





#

(o)

<u>t</u>

XX





- · Ideal system to quickly draw straight lines between two points of the wall or floor.
- · Supplied with a bottle of high quality powder for line marker.
- · Manufactured in plastic bimaterial (RUBIFLEX)high resistance to impact.
- · Includes auxiliary level for leveling rope before tagging.
- · Length of rope: 30 m.

	REF	\triangle	
"MASTER-N" LINE MARKER	75925	SUPERPRO	6



- · Supplied with a bottle of high quality powder for line marking.
- · Length of rope: 15m.

	REF	\triangle	
LINE MARKER W/TRACING POWDER	70926	SUPERPRO	6

HIGH QUALITY BLUE POWDER FOR LINE MARKER

· Ideal system to quickly draw straight lines between two

REF

70928 SUPERPRO

· Supplied with a bottle of high quality powder for line

points of the wall or floor.

marker.

MASTER LINE MARKER





CONSTRUCTION PENCIL





LINE REEL





- · Specially designed for writing on wet or glazed surfaces like ceramic tile, marble, granite, etc.
- \cdot Set of 2 construction pencils supplied in blister.

	REF	\triangle		
CONSTRUCTION PENCIL	65942	SUPERPRO	50	450

· High resistance polyester cord.

	REF	\triangle	
LINE REEL Ø 3/8X164 FT. (1.7 MM. X 50 M)	80933	SUPERPRO	12









(o)

XX

MALLETS

 Mallets for levelling the height of the TILES through out installation.







NEW

· A softer mace to protect the ceramic pieces.

	REF	\triangle		
SOFT BLACK RUBBER MALLET 17.6 OZ. (500 GR.)	88555	SUPERPRO	50	600
SOFT BLACK RUBBER MALLET 26.4 OZ. (750 GR.)	88553	SUPERPRO	40	480

RUBBER MALLET - 2 FLAT SIDES





· Allows to strike at any angle so as to install the tile into its correct position.

	REF	\triangle		
BLACK RUBBER MALLET 8.8 OZ. (250 GR.)	65904	SUPERPRO	6	336
BLACK RUBBER MALLET 17.6 OZ. (500 GR.)	65905	SUPERPRO	6	336
BLACK RUBBER MALLET 26.4 OZ. (750 GR.)	65908	SUPERPRO	6	252

RUBBER MALLET - FLAT/ SPHERICAL SIDES





· Allows to strike at any angle. One flat surface and the other spherical.

	REF	\triangle		
WHITE RUBBER MALLET 8.8 OZ. (250 GR.)	66905	SUPERPRO	6	336
WHITE RUBBER MALLET 17.6 OZ. (500 GR.)	66906	SUPERPRO	6	336
WHITE RUBBER MALLET 26.4 OZ. (750 GR.)	66907	SUPERPRO	6	252

SUCTION CUPS

 Suction cups to facilitate the handling of ceramics and other smooth materials.

SINGLE SUCTION CUP





· Maximum load capacity: 88 Lb (40 kg).

	REF	\triangle	
SINGLE SUCTION CUP	65900	PRO	1



DOUBLE SUCTION CUP





- · Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- · Maximum load capacity: 176,4LB (80 kgs).

	REF	\triangle	
DOUBLE SUCTION CUP	66900	PRO	1

TRIPLE SUCTION CUP



RM ROUGH SURFACE **SUCTION CUP**



#

(o)

t

XX





- · Injected polycarbonate body. Very light.
- · Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 25 kg.
- · Suction cup diameter: 120 mm.

	REF	\triangle	
RM ROUGH SURFACE SUCTION CUPS	66929	SUPERPRO	1

RM ROUGH SURFACE DOUBLE **SUCTION CUP**





- · Double suction cup for handling tiles with rough and/or slightly structured surfaces.
- · Body made of highly resistant aluminium.
- · Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 55 kg.
- · Suction cup diameter: 120 mm.

	REF	\triangle	
RM ROUGH SURFACE DOUBLE SUCTION CUP	66952	SUPERPRO	1

SUCTION CUP WITH VACUUM PUMP 0200

PRO

· Body made of highly resistant aluminium. With ergonomic

REF

66904

handle for greater comfort.

TRIPLE SUCTION CUP

· Maximum load of capacity: 220lbs (100 kg).



- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 110kg.

	REF	\triangle	
SUCTION CUP WITH VACUUM PUMP 0200	18919	PREMIUM	1









TILING ACCESSORIES





GLUE GUN APPLICATOR





- · Glue applicator 55 W. High performacnce.
- · 100~240V/50-60Hz.
- · Compatible with bars of 011 012mm.
- · Universal glue.

	REF	\triangle		
GLUE GUN APPLICATOR	65940	PRO	6	432
25 GLUE BARS OF 6" (175 MM.)	65946	PRO	10	800

- · Fine and coarse grit.
- · Smooths out tiles.

	REF	\triangle	
ABRASIVE BLOCK	05972	SUPERPRO	5

 \odot















WORK TABLES

· Work bench for all types of jobs.

FOLDING 4-IN-1 WORKING TABLE



- \cdot 4 uses in 1: Work bench, scaffold, dolly and creeper.
- · Foldable, easy to transport and storage.
- · Double sided board: MDF wood side (work bench function) and nonslippery PP plastic side (rest of functions). EASY interchangeable.
- · Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- · Angle conveyor and rule printed on the wooden side. Also includes a hole for small drillings (max. 25 mm) and hand tools insterts on metal
- · Folded table: 80x52x12,5cm.
- · Unfolded table: 115x52x80cm.

	REF	\triangle		
FOLDING 4-IN-1 WORKING TABLE	66924	SUPERPRO	1	16

PLASTIC TOOL BOX


TOOLS BOXES

· Tool boxes for the construction professional.



- · Light and highly functional tool box. With wheels and handle for
- · Comes with 2 holders and 4 fitments for attaching objects using elastic
- · Consists of 1 tray with 14 compartments that can be configured to specific needs and 1 inside tray with 4 compartments.
- · Capacity 15 GL. (55 L).
- · Outer Dimensions: 24" x 14" x 16" (61 x 37 x 42 cm).
- · Inner Dimensions: 20" x 12" x 14" (51 x 31 x 35 cm).

	REF	\triangle		
PLASTIC TOOL BOX	71954	SUPERPRO	1	8

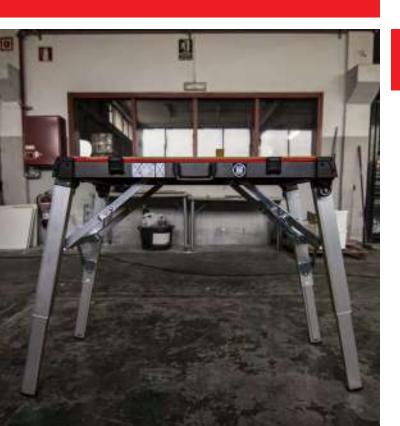

PROFESSIONAL TOOL BOX



- · Large tool box. With wheels and handles for transport.
- · Lid with 2 pockets and 4 hangers to fix objects with rubber bands (Not Included).
- · It contains internal tray with 4 compartments.
- Outer Dimensions: 31" x 19" x 20" (80 x 49 x 50 cm).
- · Inner Dimensions: 24" x 14" x 16" (62 x 35 x 41 cm).
- · Capacity: 25 GL (89 L).

	REF	\triangle		
PROFESSIONAL TOOL BOX	75965	SUPERPRO	1	4





##
































MALLETS & HAMMERS





- · Special forged Steel head, tempered and hardened.
- · SPANISH type head with electrostatic black paint coating and milled hitting ends.
- · Varnished, HICKORY wood handle.
- · Head's fixation to handle by cylindrical steel wedge and sealed by resin.
- · Weight balanced to reduce hand's kickback.

	REF	\triangle	
STONING HAMMER WOOD HANDLE 700 GR.	71896	SUPERPRO	6
STONING HAMMER WOOD HANDLE 1000 GR.	71897	SUPERPRO	6

FRAMER HAMMER RUBIFLEX HANDLE





- · Forged, adjusted and tempered steel head of 28.2 oz (800gr). Double placer / remover for nails, one magnetised.
- Ergonomic handle RUBIFLEX: Unbreakable structure with resistant-section fibre-glass nucleus, optimised for shock absorption, increasing the durability of the handle.
- Security connection between handle and steel head by inverse cone
- Grip with elastic slip-proof elastic and surface grooves for maximum hold.

	REF	\triangle	
FRAMER HAMMER 20" (500 MM.)	82986	SUPERPRO	6

STONING HAMMER SOFTGRIP HANDLE





- · Special forged Steel head, tempered and hardened.
- \cdot SPANISH type head with electrostatic black paint coating and milled hitting ends.
- PP handle with fibre glass core, optimal for shock absorption. Improves handle's long-life.
- · Bi-material SOFTGRIP handle, non-slippery and grooved for a better grip.
- · Head's fixation to handle by cylindrical steel wedge and sealed by resin.
- · Weight balanced to reduce hand's kickback.

	REF	\triangle	
STONING HAMMER SOFTGRIP HANDLE 700 GR.	71898	SUPERPRO	6
STONING HAMMER SOFTGRIP HANDLE 1000 GR.	71899	SUPERPRO	6



XX

##

(o)

<u>t</u>



· Wide range of chisels, point chisels and nippers.



- \cdot Made of CrVa. alloy steel. Forged, hardened and tempered cutting edge.
- · Regrindable.

	REF	\triangle	
CHISEL 10" X 29/32" X 17/32" (250 X 23 X 13 MM.)	70916	SUPERPRO	10
CHISEL 12" X 29/32" X 17/32" (300 X 23 X 13 MM.)	70917	SUPERPRO	10
CHISEL 14" X 29/32" X 17/32" (350 X 23 X 13 MM.)	70918	SUPERPRO	10



- · To remove tiles on renovation jobs.
- \cdot Made of CrVa. alloy steel. Forged, hardened and tempered cutting edge.
- · Regrindable.

	REF	\triangle	
WIDE CHISEL 10"/2 3/8" X 1 1/32" X 17/32" (250/60X26X13MM)	70924	SUPERPRO	10

MASON PICKS


 \cdot Made of special tempered steel, highly resistant at breaking.

MASONRY PICK



- \cdot Made of special tempered steel, highly resistant at breaking point.
- · Normalised heat treatment and tempered tip.

	REF	\triangle	
MASON PICK (SPADE/PICK) 18 OZ. (500 GR.)	82980	SUPERPRO	6

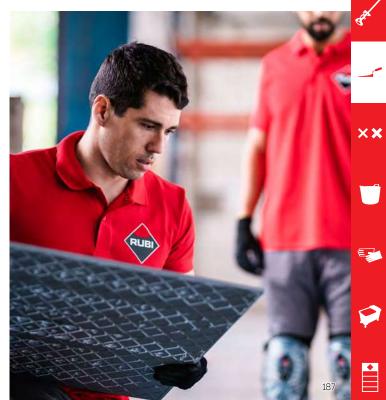







(o)

XX

SHOVELS

 Shovels and spades with varnished, wooden handle and spades highly resistant at breaking point.

WOODEN RING HANDLED POINT-TIPPED SPADE



PROP HANDLED POINT-TIPPED SPADE







- · Shovel with D finish.
- · Handle with "Y" ring shaped plastic.
- · Ergonomic grip, varnished eucalyptus.

	REF			\triangle
WOODEN RING HANDLED POINT-	82963	4	7.6	SUPERPRO
TIPPED SPADE	02703	U	70	JUPERPRE

- · Shovel with " D " shape finish.
- · Handle T shaped. Varnished wooden handle.

	REF	\triangle		
PROP HANDLED POINT-TIPPED SPANE	82964	SUPERPRO	6	36

WOODEN RING HANDLED SQUARE SHOVEL









- \cdot Squared shovel with wooden handle " Y " shaped.
- · Ergonomic grip. Varnished wooden handle.

	REF	\triangle		
WOODEN RING HANDLED SQUARE SHOVEL	82960	SUPERPRO	6	36

- \cdot Squared shovel with wooden handle " T " shaped.
- · Varnished wooden handle.

	REF	\triangle		
PROP HANDLED SQUARE SHOVEL	82961	SUPERPRO	6	36



CARPENTER'S PINCER

NIPPERS FOR PORCELAIN





#

(o)

t

XX



· Specially for cutting narrow strips of a maximum of 7/16" [1cm].

TILES

- · Replaceable scoring wheels (Ref:01953).
- · Equipped with tungsten carbide scoring wheels with titanium surface treatment to last longer. With a gentle turn, the scoring wheels can be repositioned when they start getting worn.

	REF	\triangle		
NIPPERS FOR PORCELAIN TILES	83942	SUPERPRO	5	765

NIPPERS

· Range of nippers for different uses. For porcelain,
· mosaics and other materials.

- · For general use.
- · Supplied in blister.

	REF	\triangle		
CARPENTER'S PINCER 8 3/4" (220 MM.)	71971	SUPERPRO	5	765

PARROT NIPPERS





NIPPERS FOR CERAMIC TILES



NIPPERS FOR GLASS MOSAIC







· To rectify holes on ceramics.

	REF	\triangle		
PARROT NIPPERS	65925	SUPERPRO	5	765

- · Tungsten carbide edge of great hardness.
- · To rectify cuts of ceramics.

	REF	\triangle	
NIPPERS FOR CERAMIC TILES	65926	SUPERPRO	6

- · Tungsten Carbide edge of great hardness.
- · To cut and rectify glass mosaic tiles.

	REF	\triangle	
NIPPERS FOR GLASS MOSAIC	71970	SUPERPRO	5





(o)


GROUT MORTAR APPLICATORS

Joint applicator for mortar.



- · Great capacity (650 cc) grout mortat applicator.
- · Very light structure made of aluminum.
- · It allows an easy, quick and clean application.
- · Reduce consumption of grout and after grouting residue.
- · Pressure adjustable with trigger.
- · Replaceable and adjustable nozzles to the joint width.
- · Also usable for the application of silicone and PU rigid and flexible cartridges.
- · Ouick and clean application.

	REF	\triangle	
MANUAL GROUT MORTAR APPLICATOR 650 CC.	65990	SUPERPRO	1

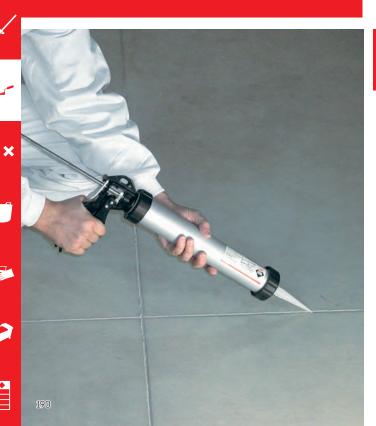

SET OF SPARE NOZZLES FOR GROUT MORTAR APPLICATOR







SPARE NOZZLES





- · Spare parts adaptable to Electric (Ref. 66915) and Manual (Ref. 65990) applicators.
- · Includes screw, piston and 3 nozzles.

	REF	\triangle	
SET OF SPARE NOZZLES FOR GROUT MORTAR	4E001	SUPERPRO	n
APPLICATOR	03981	SUPERPRU	9

- · Spare parts adaptable to Electric (Ref. 66915) and Manual (Ref. 65990) applicators.
- · Includes 6 nozzles.

	REF	\triangle	
SPARE NOZZLES FOR GROUT MORTAR	4E000	SUPERPRO	1
APPLICATOR	03780	SUPERPRU	1





ACCESSORIES FOR TILE FIXING AND FINISHING

Measuring systems
Tile spacers
Fast levelling systems











CONSTRUCTION LEVELS

· Wide range of levels.



- \cdot Machined base up to measures of 100 cm to ensure constant accuracy.
- · Accuracy: 0,5 mm/m three bubbles for checking horizontal, vertical and 45° levels.



	REF	\triangle		
RUBILEVEL 16" [40 CM.]	76920	PRO	8	2400
RUBILEVEL 24" (60 CM.)	76922	PRO	8	1600
RUBILEVEL 32" (80 CM.)	76923	PRO	8	1120
RUBILEVEL 40" (100 CM.)	76924	PRO	8	
RUBILEVEL 59" (150 CM.)	76926	PRO	2	448
RUBILEVEL 79" (200 CM.)	76927	PRO	2	448

RUBILEVEL MAGNET





- · Level manufactured with reliable, resistant aluminium.
- Machined base to ensure consistent accuracy and Neodymium magnets inserted to hold it on metal surfaces.
- · Accuracy: 0,5 mm/m.
- Three bubbles for checking horizontal, vertical and 45° levels.


	REF	\triangle		
RUBILEVEL MAGNET 20" (50 CM.)	76929	PRO	8	1920
RUBILEVEL MAGNET 24" (60 CM.)	76930	PRO	8	1600
RUBILEVEL MAGNET 32" (80 CM.)	76931	PRO	8	1120

RUBILEVEL ANTISHOCK





- · Accuracy: 0,5 mm/m.
- \cdot Three bubbles for checking horizontal,vertical and and 45° levels.
- \cdot Double and ergonomic bi-material handle.
- \cdot Rubber protector at the ends.
- DUAL view vertical vial for front measurements. Eliminates parallax error.
- · MAGNIFIED horizontal vial for the CLEAREST view of the bubble.







 (\circ)



WATER LEVEL





#

(o)

t


XX



- · Includes two graduated tanks and 20 metres of hose.
- · With caps to maintain the hose correctly filled & ready for the next use.

	REF	\triangle	
WATER LEVEL	70965	PRO	1





· Level manufactured from cast aluminium. · Machined base to ensure constant accuracy.

· Accuracy: 0,5 mm/m.

MEASURING TAPES

· Homologated precision measuring tapes. Two models available.

RUBIFLEX MEASURING TAPES





- · Ergonomic chassis made from plastic and rubber.
- · Approved precision measuring tapes: Class II
- · Magnetic tape stopper. (only available in mm).

	REF			
RUBIFLEX MEASURING TAPE 197" X 3/4" (5M X 19MM)	75901	SUPERPRO	12	864
RUBIFLEX MEASURING TAPE 315" X 1" (8M X 25MM)	75902	SUPERPRO	12	576

IRONBLADE MEASURING TAPES





- · Metal case with rubber coating to improve grip.
- · Approved precision measuring tapes: Class II
- · Automatic tape lock. (only available in mm).

1 ()		,		
	REF	\triangle		
IRONBLADE MEASURING TAPE 197" X 3/4" (5M X 19MM)	75904	SUPERPRO	12	
IRONBLADE MEASURING TAPE 197" X 3/4" (5M X 25MM.) DOUBLE MARKING	75909	SUPERPRO	12	
IRONBLADE MEASURING TAPE 315" X 3/4" (8M X 25MM)	75905	SUPERPRO	12	



(o)

ġ

XX

PLUMB BOB

· Plumb bobs.

SQUARES

PLUMB BOB



SQUARES





- · Length of line:16,4 ft.(5 m).
- · Includes wooden dolly.
- · Supplied in blister.

	REF	\triangle		
PLUMB BOB 21.2 OZ. (600 GR.)	70964	SUPERPRO	6	480



- \cdot Square 1 5/8" x 13/16" (40x20mm) with high dimensional stability.
- · With bichromated treatment.

	REF	\triangle	
SQUARE- 24" (60 CM.)	60993	SUPERPRO	1
SQUARE- 32" (80 CM.)	60994	SUPERPRO	1

TILE SPACERS 1/32" [1MM]









TILE SPACERS & WEDGES

 Tile Spacers, "T" Spacers and wedges for the correct placement of tiles. Quality base material.



· Quality base material, without impurities or imperfections.

*				
	REF	\triangle		
TILE SPACERS 1/32" (1 MM.) - (B-300 U.)	02911	SUPERPRO	10	1200
TILE SPACERS 1/32" (1 MM.) - (B- 1000 U.)	02030	SUPERPRO	1	540

- · For wall & floor tiles with minimum joint.
- \cdot Quality base material, without impurities or imperfections.

	REF	\triangle		
TILE SPACERS 1/16" (1.5 MM.) - (B-300 U.)	02912	SUPERPRO	10	960
TILE SPACERS 1/16" (1.5 MM.) - (B-1.000 U.)	02031	SUPERPRO	1	432





LONG TILE SPACERS 3/32" (2 MM L



TILE SPACERS 1/8" (3MM)









- · For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF	\triangle		
TILE SPACERS 3/32" (2 MM.) - (B-300 U.)	02901	SUPERPRO	10	1680
TILE SPACERS 3/32" (2 MM.) - (B- 1.000 U.)	02000	SUPERPRO	1	768

- · For large ceramic format and rectified.
- · Quality base material, without impurities or imperfections.

	REF	\triangle		
LONG TILE SPACERS 3/32" (2 MM.)-L - (B-300 U.)	02952	SUPERPRO	10	960
LONG TILE SPACERS 3/32" (2 MM.) -L -(B-1000 U.)	02972	SUPERPRO	1	378



- · For floor tiles with thin joint.
- · Quality base material, without impurities or imperfections.

	REF	\triangle		
TILE SPACERS 1/8" (3 MM.) -(B- 200 U.)	02902	SUPERPRO	10	1200
TILE SPACERS 1/8" (3 MM.) -(B- 1.000 U.)	02001	SUPERPRO	1	324
TILE SPACERS 1/8" (3 MM.) -(C- 15000 U.) BIG BOX	02931	SUPERPRO	1	

LONG TILE SPACERS 1/8" (3MM L) "REINFORCED"





- · For large ceramic format and rectified.
- · Quality base material , free from impurities and imperfections.
- · Redesigned internal geometry. High flexural strength and crushing.
- · Ideal for large format tiles in walls.

	REF	\triangle	
LONG TILE SPACERS 1/8" (3 MM.)-L -(B-200 U.)	02953	SUPERPRO	10
LONG TILE SPACERS 1/8" (3 MM.)-L -(B-1000 U.)	02973	SUPERPRO	1

TILE SPACER 5/32" (4MM) " REINFORCED



- · For floor tiles.
- · Quality base material, free from impurities and imperfections.
- · Redesigned internal geometry. High flexural strength and crushing.
- · Ideal for large formats.

	REF	\triangle		
TILE SPACERS 5/32" (4 MM.) -(B-200 U.)	02954	SUPERPRO	10	960
TILE SPACERS 5/32" (4 MM.) -(B-1000 U.)	02974	SUPERPRO	1	216

TILE SPACERS 3/16" (5MM)





- · For floor tiles.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout

	REF	\triangle		
TILE SPACERS 3/16" (5 MM.) -(B-100 U.)	02903	SUPERPRO	10	960
TILE SPACERS 3/16" (5 MM.)- [B-1.000 U.)	02002	SUPERPRO	1	144





#






















TILE SPACERS 9/32" (7MM)





TILE SPACERS 13/32" (10MM)





· For floor tiles.

0

- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout

	REF	\triangle		
TILE SPACERS 1/4" (6 MM.) - (B- 100 U.)	02036	SUPERPRO	10	540

- · For floor tiles.
- \cdot Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
TILE SPACERS 9/32" (7 MM.) -(B-100 U.)	02904	SUPERPRO	10	540

- · For inductrial or rustic tiles.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
TILE SPACERS 13/32" (10 MM.) -(B-50 U.)	02905	SUPERPRO	10	540

T-SPACERS 1/32" (1MM)








T-SPACERS 1/16" (1.5MM)









· Quality base material without impurities or imperfections.

	REF	\triangle	
T-SPACERS 1/32" (1MM) (B-300 UN.)	02859	SUPERPRO	10

- · Ideal for "Brick Bond" and perimeter joints.
- · Quality base material without impurities or imperfections.

()	1 -	- 1	
	REF	\triangle	
T-SPACERS 1/16" (1.5MM) (B-300 UN.)	02860	SUPERPRO	10

- · Ideal for "Brick Bond" and perimeter joints.
- · Quality base material without impurities or imperfections.

	REF	\triangle		
T-SPACERS 3/32" (2MM) (B-300 UN.)	02861	SUPERPRO	10	
T-SPACERS 3/32" (2MM) (B-1000 UN.)	02864	SUPERPRO	1	540



T-SPACERS 1/8" (3MM)



T-SPACERS 3/16" (5MM)



T-SPACERS 13/32" [10MM.]





##

(o)

<u>t</u>



- · Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.

	REF	\triangle		
T-SPACERS 1/8" (3 MM.) -(B-200 U.)	02923	SUPERPRO	10	1680
T-SPACERS 1/8" (3 MM.) -(B-1000 U.)	02063	SUPERPRO	1	



- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
T-SPACERS 3/16" (5 MM.) -(B-100 U.)	02924	SUPERPRO	10	2040



- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
T-SPACERS 13/32" (10 MM.) -(B-50 U.)	02926	SUPERPRO	10	720

WEDGES





- · Wedges for tiling.
- · Quality base material, without impurities or imperfections.

	REF	\triangle		
WEDGES 3/16" (5MM.)- (B-250 U.)	02396	SUPERPRO	10	2400
WEDGES 3/16" (5 MM.)-(B-500 U.)	02950	SUPERPRO	10	1500
WEDGES 5/16" (7.5MM.)- (B-250 U.)	02397	SUPERPRO	10	1800
WEDGES 5/16" (7.5 MM.)- (B- 500 U.)	02951	SUPERPRO	10	960

DISPLAY BOX



· Orders by boxes only. Contains bags.

	REF	\triangle	8 ' (× / 🔯	
TILE SPACERS 1/32" (1 MM.) - (42 X 300 PC.) DISPLAY BOX	02123	SUPERPRO	42	300	32
TILE SPACERS 1/16" (1.5 MM.) - (36 X 300 PC.) DISPLAY BOX	02124	SUPERPRO	36	300	32
TILE SPACERS 3/32" (2 MM.) - (48 X 300 PC.) DISPLAY BOX	02125	SUPERPRO	48	300	32
TILE SPACERS 1/8" (3 MM.) - (42 X 200 PC.) DISPLAY BOX	02127	SUPERPRO	42	200	32
TILE SPACERS 3/16" (5 MM.) - (36 X 100 PC.) DISPLAY BOX	02130	SUPERPRO	36	100	32
TILE SPACERS 9/32" (7 MM.) - (16 X 100 PC.) DISPLAY BOX	02132	SUPERPRO	16	100	30
TILE SPACERS 13/32" (10 MM.) - (18 X 50 PC.) DISPLAY BOX	02135	SUPERPRO	18	50	32
WEDGES - 3/16" (5 MM.) - (48 X 500 PC.) DISPLAY BOX	02279	SUPERPRO	48	500	30
TILE SPACERS 3/16" (5 MM.) - (36 X 100 PC.) DISPLAY BOX TILE SPACERS 9/32" (7 MM.) - (16 X 100 PC.) DISPLAY BOX TILE SPACERS 13/32" (10 MM.) - (18 X 50 PC.) DISPLAY BOX WEDGES - 3/16" (5 MM.) - (48 X 500 PC.)	02132	SUPERPRO SUPERPRO	16	100	30

















"TILE SPACERS" AND "T-SPACERS" NEEDED BY M² (SQ. FT.) ACCORDING TO TILE SIZE.

							SQUARE	FORMATS					
	cm	10 × 10	15 x 15	20 x 20	30 x 30	33 x 33	40 x 40	45 x 45	50 x 50	60 x 60	75 x 75	80 x 80	90 x 90
	inch	4" × 4"	6" x 6"	8" x 8"	12" × 12"	13" x 13"	16" x 16"	18" × 18"	20" x 20"	24" x 24"	30" x 30"	31" × 31"	35" x 35"
X	x m ² / x10 sq.ft.	100	49	25	16	13	9	9	4	4	2	2	2
一	x m ² / x10 sq.ft.	200	91	50	25	21	15	13	8	6	4	4	4


		RECTANGULAR FORMATS													
	cm	15 x 60	15 x 90	15 x 120	20 x 40	20 x 60	20 x 80	20 x 100	25 x 100	30 x 60	30 x 90	30 x 120	40 x 80	40 x 120	45 x 90
	inch	6" x 24"	6" x 35"	6" x 47"	8" x 16"	8" x 24"	8" x 31"	8" x 40"	10" x 40"	12" x 24"	12" x 35"	12" x 48"	16" x 31"	16" x 48"	18" x 35"
X	x m ² / x10 sq.ft.	16	10	8	18	12	9	7	6	8	5	4	4	3	3
一一	x m ² / x10 sq.ft.	26	17	13	29	19	14	12	9	16	9	6	7	5	6


		LARGE SPECIAL FORMATS								
	cm	100 x 150	100 x 300	120 x 120	120 x 360	150 x 150	150 x 300			
	inch	40" x 59"	40" x 118"	48" x 48"	48" x 142"	59" x 59"	59" x 118"			
X	x pz.	2	2	2	2	2	2			
\Box	x pz.	4	4	4	4	4	4			



(o)

LEVELLING SYSTEM: CONSUMPTION

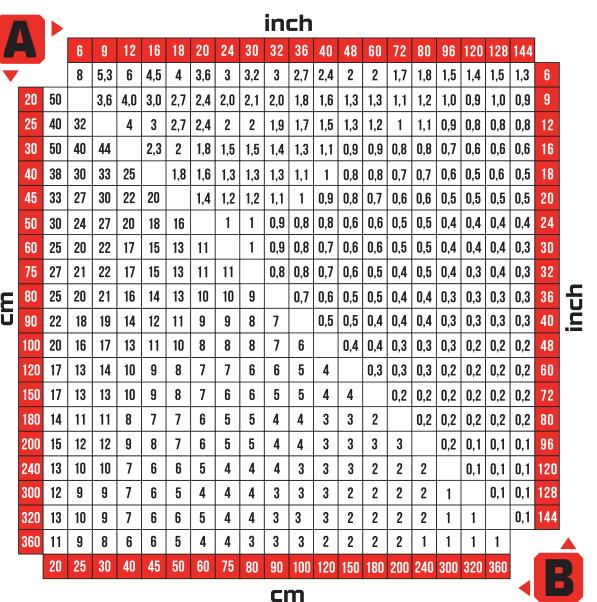





#

(o)





































 System to facilitate the laying of large format tiles, avoid lippage and improving finishing.



- · Avoid lippage during the fixing of ceramic tiles in both floor and wall tiles.
- \cdot For tile formats from 30x30 cm (12"x12") or bigger. Always with back buttering.
- · Guarantee flatness and regularity of the fixing surface.
- · Intuitive and easy to use. Results less sensitive to the user's skill.
- · Impact removal system. Always in the direction of the grout.
- · Compatible with tiles between 3 and 16mm thickness.
- · Strip made in technical polymer. System sensitive to humidity.
- · Lightweight pliers with bimaterial handle softgrip.
- · Quick and comfortable.
- Pliers with 4 work positions. Fast thickness adjust to each tile.














#

(o)

t

XX





· The set consists of pliers, 100 strips and 100 reusable caps. Packaged in a handy bucket.

	_	-		
	REF	\triangle		
KIT TILE LEVEL QUICK	02941	PREMIUM	1	80



- · Made of technical polymer non-hygroscopic.
- · Doesn't need soaking before use.
- · The strip thickness guarantees minimum grout of 1 mm.
- · Ensures continuous tension between strips and capsgrrove.
- \cdot Grooved bases to improve the wetting of ceramic tile.

	REF	\triangle		
TILE LEVEL (B-100 U.) STRIP	02893	PREMIUM	6	180
TILE LEVEL (B-200 U.) STRIP	02894	PREMIUM	12	180
TILE LEVEL (B-400 U.) STRIP	02895	PREMIUM	6	48

TILE LEVEL QUICK CAPS







TILE LEVEL QUICK HEAVY DUTY PLIERS







distribution of the contact pressure.

	REF	\triangle		
TILE LEVEL CAPS (B-100 U.)	02890	PREMIUM	10	300
TILE LEVEL CAPS (B-400 U.)	02892	PREMIUM	8	64

· Ergonomic design with bimaterial handle. Made of very light and resistant materials. Tighten regulation system depending on the thickness of the ceramic tile.

	REF	\triangle		
TILE LEVEL QUICK PLIERS	02989	PREMIUM	1	756

- · Metal version of the plastic TLQ pliers, fully compatible.
- · Made of zinc-plated carbon steel.
- · Ergonomic bi-material handle (plastic and rubber).
- · Height adjustment with regulation screw (no tools required).

	REF	\triangle	
TILE LEVEL QUICK HEAVY DUTY NIPPER	03900	PREMIUM	1





























 System to facilitate the laying of large format tiles, avoid lippage and improving finishing.



- · Avoids lippage during tile laying in both floor and walls.
- \cdot For tile formats from 30x30 cm (12"x12") or bigger. Always with back buttering.
- · EASY and INTUITIVE use.
- \cdot Impact removal system. ALWAYS in the direction of the grout.
- · Guarantee flatness and regularity of the laying surface.
- · Reusable wedges.
- \cdot STURDY pliers with pressure adjustment according to the tile thickness.










DELTA LEVEL SYSTEM STRIP

NEW 0,5 mm

- · Made in PP.
- · Different models available:
- \cdot Strip 0,5 mm / 1 mm / 1,5 mm and 2 mm. for tiles from 3 to 12 mm.
- · Strip 1.5 mm and 2 mm for tiles from 11 to 20 mm.





1.5 mm





	REF			
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM	03929	SUPERPRO	22	352
[B-100 UN] STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM				
(B-200 UN)	03930	SUPERPRO	21	168
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM	03931	SUPERPRO	13	104
[B-400 UN]	03731	JUPERPRU	13	104
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM	03932	SUPERPRO	1	16
[B-2400 UN] STRIP 3-12MM 1MM DELTA LEVEL SYSTEM				
(B-100 UN)	02850	SUPERPRO	22	352
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM	02851	SUPERPRO	21	168
[B-200 UN]	02031	JUPERPRU	21	100
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM	02839	SUPERPRO	13	104
[B-400 UN] STRIP 3-12MM 1MM DELTA LEVEL SYSTEM				
(B-2400 UN)	02870	SUPERPRO	1	16
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM	02040	CURERRA	22	752
[B-100 UN]	02840	SUPERPRO	22	352
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM	02841	SUPERPRO	21	168
[B-200 UN]	020.1			
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-400 UN)	02842	SUPERPRO	13	104
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM				
(B-2400 UN)	02855	SUPERPRO	1	16
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM	02852	SUPERPRO	22	 352
(B-100 UN)	UZUJZ	JUPLKPKU	22	777
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM	02853	SUPERPRO	24	192
[B-200 UN] STRIP 3-12MM 2MM DELTA LEVEL SYSTEM				
(B-400 UN)	02854	SUPERPRO	13	104
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM	02856	SUPERPRO	1	16
(B-2400 UN)	02030	JUPERPRU	1	
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM	02866	SUPERPRO	20	320
[B-100 UN] STRIP 6-15MM 3MM DELTA LEVEL SYSTEM				
(B-200 UN)	02867	SUPERPRO	21	168
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM	020/0			
[B-400 UN]	02868	SUPERPRO	11	88
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM	02869	SUPERPRO	1	16
[B-2400 UN]				
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM (B-100 UN)	06826	SUPERPRO	20	320
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM				
(B-200 UN)	06827	SUPERPRO	21	168
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM	06828	SUPERPRO	11	88
(B-400 UN)	00020	JUPLKPKU	111	
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM	06829	SUPERPRO	1	16
[C-2400 UN] STRIP 11-20MM 1,5MM DELTA LEVEL SYSTEM				
(B-100 UN)	02846	SUPERPRO	20	320
STRIP 11-20MM 2MM DELTA LEVEL SYSTEM	02050	CHDEDDDO	20	770
[B-100 UN]	02858	SUPERPRO	20	320

KIT DELTA LEVEL SYSTEM



- \cdot The kit consists of 1 pliers, 100 strips and 100 reusable wedges.
- · Packaged in a handy bucket.


	REF	\triangle		
KIT DELTA LEVEL SYSTEM 1MM (3-12MM)	03956	SUPERPRO	1	80
KIT DELTA LEVEL SYSTEM 1,5MM (3-12MM)	03957	SUPERPRO	1	80
KIT DELTA LEVEL SYSTEM 2MM (3-12MM)	03958	SUPERPRO	1	80

DELTA LEVEL SYSTEM WEDGE N



PATENT





· Recommended for formats of 30x30 cm and above, always with back buttering.

	REF							
DELTA LEVEL SYSTEM WEDGE N (B-100 UN)	03952	12	192					
DELTA LEVEL SYSTEM WEDGE N (B-200 UN)	03953	13	104					
DELTA LEVEL SYSTEM WEDGE N (B-400 UN)	03954	6	48					
DELTA LEVEL SYSTEM WEDGE N (C-1200 UN)	03955	1	16					

DELTA LEVEL SYSTEM PLIERS FAST-FIX





PATENTED

- · FAST-FIX regulation system. Without screws, faster and intuitive.
- · Made of steel with bi-material soft-grip handles for greater ergonomics.
- · Protective cover on the pressure cam to avoid damaging the tile.

	REF	\triangle	
DELTA LEVEL SYSTEM PLIERS	07001	SUPERPRO	
FAST-FIX	03901	SUPERPRU	6















































CYCLONE LEVEL SYSTEM



 System to facilitate the laying of large format tiles, avoid lippage and improving finishing.















- · A tool is not required for their installation.
- · EASY, QUICK and INTUITIVE to USE. Results less dependent on the skill and experience of the user.
- · LARGE and ERGONOMIC Cap. Does not injure fingers when tightening.
- \cdot GUARANTEES the flatness and uniformity of the installation surface.
- · System removal by IMPACT (kick or mallet). ALWAYS in the direction of the grout joint.
- · Reusable caps.
- · The base of the clip ensures continuous tension between the clip and the cap.
- · The lateral grooves at the base of the clip FACILITATE the spread of the adhesive, thus improving the adhesion of the tile.
- · Tightening adjustment system depending on the thickness of the ceramic tile.
- · Recommended for tiles with thicknesses from 3 to 18 mm.













- · Available in various models:
- · Cross base clips of 1.5 and 3 mm.
- · Visual thickness identification by colour.

	REF	\triangle		
CYCLONE L.S. 1,5 MM CROSS BASE (B-100)	35952	SUPERPRO	36	12
CYCLONE L.S. 1,5 MM CROSS BASE (B-300)	35953	SUPERPRO	12	12
CYCLONE L.S. 1,5 MM CROSS BASE (B-2400)	35954	SUPERPRO	1	20
CYCLONE L.S. 3 MM CROSS BASE (B-100)	35955	SUPERPRO	36	12
CYCLONE L.S. 3 MM CROSS BASE (B-300)	35956	SUPERPRO	12	12
CYCLONE L.S. 3 MM CROSS BASE [B-2400]	35957	SUPERPRO	1	20



- \cdot The kit consists of 300 clips and 100 reusable caps.
- · Packaged in a practical bucket.

	REF	\triangle		
KIT CYCLONE 1,5 MM	35964	SUPERPRO	3	-
KIT CYCLONE 3 MM	35965	SUPERPRO	3	-

- · Available in various models:
- · Flat base clips of 1, 1.5, 2 and 3 mm.
- · Vieual thicknoce identification by colour

· Visual thickness identification by colour.							
REF	\triangle						
35937	SUPERPRO	36	12				
35938	SUPERPRO	12	12				
35939	SUPERPRO	1	20				
35940	SUPERPRO	36	12				
35941	SUPERPRO	12	12				
35942	SUPERPRO	1	20				
35943	SUPERPRO	36	12				
35944	SUPERPRO	12	12				
35945	SUPERPRO	1	20				
35946	SUPERPRO	36	12				
35947	SUPERPRO	12	12				
35948	SUPERPRO	1	20				
	REF 35937 35938 35939 35940 35941 35942 35943 35944 35945 35946 35947	REF SUPERPRO 35937 SUPERPRO 35938 SUPERPRO 35939 SUPERPRO 35940 SUPERPRO 35941 SUPERPRO 35942 SUPERPRO 35943 SUPERPRO 35944 SUPERPRO 35945 SUPERPRO 35946 SUPERPRO 35947 SUPERPRO	REF C 35937 SUPERPRO 36 35938 SUPERPRO 12 35939 SUPERPRO 1 35940 SUPERPRO 36 35941 SUPERPRO 12 35942 SUPERPRO 1 35943 SUPERPRO 36 35944 SUPERPRO 12 35945 SUPERPRO 1 35946 SUPERPRO 36 35947 SUPERPRO 12				

CYCLONE CROSS T BASE





· Available in various models:

NEW

- \cdot 1.5 and 3 mm T-base flanges.
- · Visual identification of thickness by colors.

	REF	\triangle		
CYCLONE L.S. 1,5 MM CROSS T BASE (B-100)	35958	SUPERPRO	36	-
CYCLONE L.S. 1,5 MM CROSS T BASE (B-300)	35959	SUPERPRO	12	-
CYCLONE L.S. 1,5 MM CROSS T BASE (C-2400)	35960	SUPERPRO	1	-
CYCLONE L.S. 3 MM CROSS T BASE (B-100)	35961	SUPERPRO	36	-
CYCLONE L.S. 3 MM CROSS T BASE (B-300)	35962	SUPERPRO	12	-
CYCLONE L.S. 3 MM CROSS T BASE (C-2400)	35963	SUPERPRO	1	-

CYCLONE CAPS







- · Reusable.
- · Special 6 mm external thread.
- · Eccentric detail for better force concentration.
- · Crowned area for better grip.
- · Dimensions: 59x59x38 mm
- · Supplied in reusable container.

	REF	\triangle		
CYCLONE CAPS (B-100)	35949	SUPERPRO	5	50
CYCLONE CAPS (B-300)	35950	SUPERPRO	4	24
CYCLONE CAPS (B-1200)	35951	SUPERPRO	1	-

XX

##

(o)

<u>t</u>





RUBBLE CHUTES BUCKETS & TUBS

Rubble chutes
Plastic products for construction































REINFORCED **PLASTIC RUBBLE CHUTES** "LIGHTCHUTE"

- · Plastic rubble chutes are a safe and economical way to move rubble and other site waste from high storeys to containers at street level. Their ease of use means that

TOP PLASTIC RUBBLE CHUTE "LIGHTCHUTE"





- · For loading waste on lightchute chutes.
- · Also compatible as top Hopper or an intermediate loading point.
- · Excellent resistance to impact by deformation.
- · Higher durability.
- \cdot 6 mm thick walls with ribbed interior that protects against wear and tear.
- Equipped with 6 mm thick chains, according to DIN 763 norm.
- · Locking chain of 3 mm for intermediate chutes.
- · Fast and easy assembly. Equipped with quick-clip system.
- · Stackable for saving space.













	REF					₩				
TOP PLASTIC RUBBLE CHUTE "LIGHTCHUTE"	88765	SUPERPRO	19 1/8" 485 mm	17 11/16" 450 mm	21 1/4" 54 cm	20" 50 cm	1/4" 6 mm	12.6 Lb 5.7 kg	1	28

PLASTIC RUBBLE CHUTE STANDARD SECTION "LIGHTCHUTE"





· Attaches to sections with top and side hoppers and all other chute accessories.


















Essential rules to follow for assembly



The chute chains should always be hanging down, never upwards.




The chute column should hang free, with no bends and held only by the upper part.



You can request sets of chains with carabiners for the first chute. * Safety Catch

✔ Recommended one support every 15 metres of chute column.

Follow the instructions




BENDS: Left: What you should NOT do. Right: Perfect angle.



SIDE HOPPER DO NOT force onto the wall, making the column unbalanced. DO keep the column upright



TOP HOPPER DO NOT start the column with a side hopper piece. Unsecured, loose or unscrewed hopper section

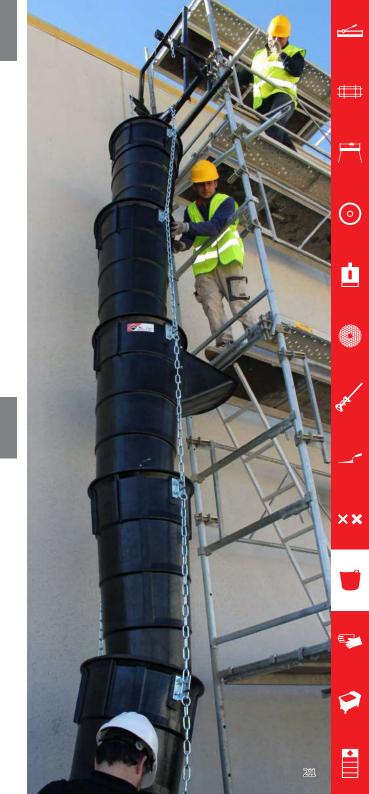





荁

 \odot

ACCESSORIES FOR RUBBLE CHUTES

- · Wide range of accessories for rubber and plastic rubble chutes.
- They provide a faster, safer and more comfortable way of fixing the chute to a building or scaffolding.



- · Mounting bracket to fix top of chute to scaffold.
- · Reinforced. Holds the weight of the chutes that hang from it.
- · Easily fixes to the scaffold.
- · For greater safety and security we recommend installing this piece at intermediate sections of the chute column. Specifically, one piece every 15 metres of chute.

	REF	\triangle		
CHUTE SCAFFOLD FASTENING SYSTEM	88517	PREMIUM	1	5

CHUTE EXTENSION ARMS



RUBBLE CHUTE SUPPORT BRACKET FOR BUILDINGS





- · Mounting bracket for the top of the chute column.
- · Reinforced. Holds the weight of the chutes that hang from it.
- · Easily attachable to any structural element of the building (floor frame, window, balcony, etc.) thanks to its two fixing positions.
- · Includes two clamps for ideal fastening.
- · For greater safety and security we recommend installing this piece at intermediate sections of the chute column. Specifically, one piece every 15 metres of chute.

	REF	\triangle		
RUBBLE CHUTE SUPPORT BRACKET FOR BUILDINGS	88515	PREMIUM	1	5



	REF	\triangle		
CHUTE EXTENSION ARMS (2UN)	88513	PREMIUM	1	2

XX





BALANCE BEAM COLUMN HOOK






##

(o)

<u>t</u>

XX



- · This accessory fixes to the last section of the chute.
- · It allows the last section of the chute to be easily manoeuvred into the desired position.

	REF	\triangle	
CHUTE CONTROL RING	88516	PREMIUM	1



· This accessory is compatible with the winch to balance the chute fastening.

	REF	\triangle		
BALANCE BEAM COLUMN HOOK	88514	PREMIUM	1	5

RUBBLE CHUTE CHAIN SET







- · Set of chains for rubble chute (2un).
- · Extra-reinforced. 7mm thickness. DIN 763 standard.

	REF	\triangle	
RUBBLE CHUTE CHAIN SET (2UN)	88519	PREMIUM	1

BRACKET & WINCH FOR CHUTE



- \cdot Attaches to the chute support brackets for buildings and scaffold.
- · Manual winch with 15 metres of cable, equivalent to the length of 12
- · Ideal for building renovation works where a tower crane is not available.

	REF	\triangle	
BRACKET & WINCH FOR CHUTE	88520	PREMIUM	1







PLASTIC

BUCKETS

10. 12. 15 and 22 litres.

"LIGHTBUCK"

· High quality plastic buckets are an

outstanding option due to their competitive price and light weight. The range of plastic buckets includes models with capacities of

· Made with high quality polyethylene. Greater

· Very thick walls for maximum strength and

· Suitable for all types of work in the





























- · Greater comfort during transport. For easy waste collection.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.









	REF	\triangle						
"ITALIANO" PLASTIC	88770	PRO	0"	0"	10 I.	2 Lb	10	600
BUCKET (10 L.)		88//U PKU	- cm	- mm	10 1.	1 kg		

PLASTIC BUCKET WITH GRADUATION "LIGHTBUCK" (12 L.)





- · Greater comfort during transport. For easy waste collection.
- · Embossed scale.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.







	REF	\triangle						
PLASTIC BUCKET WITH	88776	PRO	0"	0"	12.1	2 Lb	10	/ ₀ 0
GRADUATION (12 L.)	00//0	PKU	- cm	- mm	12 1.	1 kg	10	400



PLASTIC BUCKET WITH GRADUATION & SPOUT "LIGHTBUCK" (15 L.)









- · Embossed scale.
- · With spout to prevent spillages when pouring.
- · With reinforced rim for greater resistance.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.









	REF	\triangle	□ ‡	\Box		range		
PLASTIC BUCKET WITH GRADUATION & SPOUT	88775	PRO	0" - cm	0" - mm	15 I.	2.6 Lb 1.2 kg	10	360

PLASTIC BUCKET MODEL 2 "LIGHTBUCK" HANDLE EXT. [20 L.]







NEW

- · Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle.
- · Plastic handle. Comfort.









PLASTIC BUCKET MODEL 2 "LIGHTBUCK" (22 L.)





- · Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle.
- · Plastic handle. Comfort.









	REF	\triangle						
PLASTIC BUCKET MODEL 2 WITH PLASTIC HANDLE [22 L.]	88772	PRO	14 9/16" 370 mm	10 5/8" 27 cm	22 I.	2 Lb 1 kg	10	450





















































PLASTIC TUBS "FLEXTUB"

- The high quality plastic tubs are suitable for use in various industries, combine optimal resistance with good flexibility and are very lightweight. Their shape and the design of their handles means that any of the plastic tubs in this range can be carried in one hand with no risk of breakage or fatigue.





- Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.

BLACK PLASTIC BUCKET NO.3 (40 L.) HEAVY DUTY









33 cm





17 5/16"

440 mm



40 I.



2.4 Lb	10	300	
1.1 kg	10	300	

PLASTIC TUBS №. 1 "FLEXTUB" (25 L.)





· Greater comfort during transport. For easy waste collection.















PLASTIC TUB N . 4 "FLEXTUB" [55 L.]









· Lightweight.



	REF	\triangle	□ ;	\Box		\triangle		
PLASTIC TUB BLACK COLOR №.	88774	PRO	13"	20 7/8"	55 I.	3.5 Lb	10	200
A [55 I]	00//4	PKU	33 cm	530 mm	JJ 1.	16 kg	10	200



- · Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.



	REF	\triangle	□;					
PLASTIC TUB BLACK COLOR №. 3 (40 L.)	88773	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB CREAM COLOR №. 3 [40 L.]	88723	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB RED COLOR №. 3 (40 L.)	88726	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB YELLOW COLOR №. 3 [40 L.]	88720	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB BLUE COLOR №. 3 (40 L.)	88721	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB GREEN COLOR №. 3 (40 L.)	88728	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB PURPLE COLOR Nº. 3 (40 L.)	88729	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB PISTACHIO COLOR №. 3 (40 L.)	88725	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB ORANGE COLOR №. 3 (40 L.)	88724	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300



























SAFETY EQUIPMENT

Personal equipment for construction professionals





































KNEE PADS, **ERGONOMIC SEAT AND CUSHION**

· Range of knee pads and ergonomic seat.









- · Useful for any task that requires kneeling for prolonged periods of time.
- · Ideal for much more comfortable installation of tiles and flooring in general in different phases of the installation: substrate preparation, installation, grouting and cleaning.
- · LARGE SUPPORT surface area for optimal STABILITY and COMFORT.
- · Double strap for keeping the knee pad tightly fitted to the leg at all
- · Avoids blocking of blood flow at the back of the knee.
- · Quick strap fastening.
- · In accordance with EN14404.
- · Performance level: 1.

	REF	\triangle		
SET OF PROFESSIONAL KNEE PADS N	66957	SUPERPRO	6	192

KNEE CUSHION





- · Polyurethane cushion for protecting the knees.
- · Makes it easy to work on the floor without using knee
- · Its wide surface allows its use as a seat.

	REF	\triangle	
KNEE CUSHION	65943	PRO	1

FLEX KNEE PADS





- · Protection ergonomic flexible. Adjustable elastic band fastener.
- · Professional knee pads of high comfort.
- · Inner body soft materials suitable to the user,
- · Flexible and resistant outer shell.
- · Conforms to EN14404.
- · Protection level: 1.

	REF	\triangle	
FLEX KNEE PADS	81994	PRO	6



GEL DUPLEX KNEE PADS







- · Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- · Wide range of uses thanks to their design " two in one ":
- · Can be used together with the external rubber protection of great stability and resistance.
- · With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- · They incorporate a double fastener, inferior and superior, easy adjustable.
- · Conforms to EN14404.
- · Protection level: 1

	REF	\triangle		
GEL DUPLEX KNEE PADS	81989	PREMIUM	6	96









- · Ergonomic design professional and high comfort knee pads.
- · Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- · In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- · They incorporate two bands Neoprene closure.
- · Conforms to EN14404.
- · Protection level: 1.

	REF	\triangle		
GEL COMFORT KNEE PADS	81998	SUPERPRO	6	96

SR-1 ERGONOMIC SEAT









曲




























- · Allows an ergonomic position of comfort.
- · Prevents injuries in knees and back.
- · Adjustable seat height and angle for optimum adaptation to each use.
- · Robust construction with 7 heavy duty wheels.
- · Includes tray for tools and accessories.
- · Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks.
- · Replaceable ergonomic kneepads.
- · Maximum weight: 286 lb (130 kg).

	REF	\triangle		
SR-1 ERGONOMIC SEAT	81999	SUPERPRO	1	18



(o)

XX

SAFETY EQUIPMENT

· Safety equipment for building professionals.

WHITE LENS GOGGLES







- · Mechanical resistance to high speed particles, low energy.
- · Extendable in length and vertically adjustable side pieces.
- · Anti-scratch and anti-fog.
- · UV Filter.
- · Comfortable and light.
- · Conforms to EN166 and EN170

	REF	\triangle		
WHITE LENS GOGGLES	80918	SUPERPRO	12	1200

- Comfortable and effective protection for high noise environments.
- · Conforms to EN352-1.

EAR PROTECTOR

	REF	\triangle	
EAR PROTECTOR	80903	SUPERPRO	6

LUMBAR PROTECTOR





- · Recommended to avoid low-back injuries when loading weight or maintain fixed positions.
- · With vertical reinforcement in the lower-back area.
- \cdot Side devices to adjust the pressure at the time of stress.
- · Available in 3 sizes: M. L and XL

	REF	\triangle	
LUMBAR PROTECTOR - L (37 13/16"-40 15/16") (96-104 CM)	80913	SUPERPRO	1
LUMBAR PROTECTOR - XL (40 15/16"-44 1/8") (104-112 CM)	80914	SUPERPRO	1

LATEX GLOVES



- · Ideal for wet or abrasives tasks.
- · For minimal risks only.
- · Made of 100% latex.
- · Conforms to EN420.

	REF	\triangle		
LATEX GLOVES	20907	SUPERPRO	12	3240

SET OF SMOOTH SOLES





· Increases contact by 100% approx.

	REF	\triangle	
SET OF SMOOTH SOLES	05985	SUPERPRO	18







ACCESSORIES FOR CLEANUP AND MAINTENANCE

Products and accessories for cleaning and installing ceramic tile Cleaners and polishers







(o)

<u>t</u>

PRODUCTS FOR CLEANING


· 25 I. and 200 I. packages available on request, minimum order applies (400 l.)



· Product specially made for cleaning cement, mortar, tile cement and any limestone base substance. Also suitable for spot cleaning of efflorescence (salt) on brick walls, terraces or baked tiles etc...

	REF	\triangle		
RC-10 CEMENT REMOVER 5 L. (ONLY AVAILABLE FOR SPAIN, FRANCE, UK, ITALY & CUBA)	22950	SUPERPRO	2	
RC-10 CEMENT REMOVER 200 L. CONT. (MINIMUM ORDER QUANTITIES 400L.)	22906	SUPERPRO	1	2

SUPERPRO SPONGES



Ref. 22928

- · PLUS models have cuts for increased drag on the dirt.
- · Ref. 20905 and 20906 available in Palbox.

20905	SUPERPRO	8x5 1/8x2 3/4"		6		
20905	SUPERPRO	8x5 1/8x2 3/4"				
		20x13x7 cm	1	2	24	384
20917	SUPERPRO	8x5 1/8x2 3/4" 20x13x7 cm	1	2	24	288
20928	SUPERPRO	7x4x2 3/4" 18x10x7 cm	3	3	24	384
20932	SUPERPRO	7x4x2 3/4" 18x10x7 cm	3	3	24	384
20906	SUPERPRO	8x5 1/8x2 3/4" 20x13x7 cm	4	2	24	288
20918	SUPERPRO	8x5 1/8x2 3/4" 20x13x7 cm	4	2	24	288
20992	SUPERPRO	7x4x2 3/4" 18x10x7 cm	4	3	24	288
22928	SUPERPRO	6 11/16x4x1 9/16" 17x10x4 cm	4	4	12	792
22929	SUPERPRO	6 11/16x4x1 15/16" 17x10x5 cm	4	4	10	640
	20928 20932 20906 20918 20992 22928	20928 SUPERPRO 20932 SUPERPRO 20906 SUPERPRO 20918 SUPERPRO 20992 SUPERPRO 22928 SUPERPRO	20x13x7 cm 7x4x2 3/4" 18x10x7 cm 7x4x2 3/4" 18x10x7 cm 7x4x2 3/4" 18x10x7 cm 7x4x2 3/4" 18x10x7 cm 8x5 1/8x2 3/4" 20x13x7 cm 20y18 SUPERPRO 8x5 1/8x2 3/4" 20x13x7 cm 20y18 SUPERPRO 7x4x2 3/4" 20x13x7 cm 20y19 SUPERPRO 6 11/16x4x1 9/16" 17x10x4 cm 22y29 SUPERPRO 6 11/16x4x1 15/16"	20x13x7 cm 7x4x2 3/4" 18x10x7 cm 7x4x2 3/4" 3 20932 SUPERPRO 20932 SUPERPRO 20906 SUPERPRO 20918 SUPERPRO 20918 SUPERPRO 20918 SUPERPRO 20919 SUPERPRO 20918 SUPERPRO 20918 SUPERPRO 20918 SUPERPRO 20918 SUPERPRO 20932 SUPERPRO 20918 SUPERPO 20918 SUPERPRO 20918	20x13x7 cm 7x4x2 3/4" 3 3 3 20932 SUPERPRO 7x4x2 3/4" 18x10x7 cm 3 3 3 20906 SUPERPRO 20918 SUPERPRO 8x5 1/8x2 3/4" 20x13x7 cm 4 2 20918 SUPERPRO 8x5 1/8x2 3/4" 20x13x7 cm 4 2 20992 SUPERPRO 7x4x2 3/4" 20x13x7 cm 4 2 20992 SUPERPRO 6 11/16x4x1 9/16" 17x10x4 cm 22929 SUPERPRO 6 11/16x4x1 15/16" 4 4 22929 SUPERPRO 6 11/16x4x1 15/16" 4 4	20x13x7 cm 7x4x2 3/4" 3 3 24 20928 SUPERPRO 20932 SUPERPRO 20932 SUPERPRO 20906 SUPERPRO 20918 SUPERPRO 20918 SUPERPRO 20918 SUPERPRO 20919 SUPERPRO 2013x7 cm 20919 SUPERPRO 2013x7 cm 20919 SUPERPRO 2013x7 cm 2014 2 24 2015x7 cm 2015x7



 Complete range of sponges and grout floats for cleaning and protection of tiles.




XX












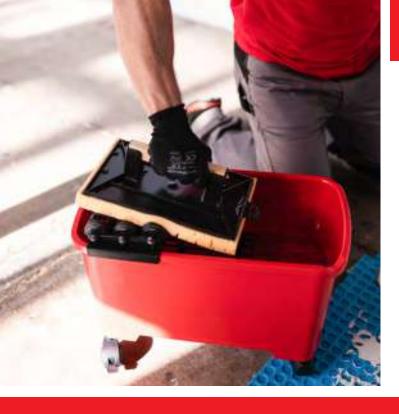

PRO SPONGES

S



- · Polyurethane sponges.
- · HIDRO models are highly absorbent.

	REF			6			
STANDARD PRO SPONGE	24966	PRO	6 11/16x4x2 3/4" 17x10x7 cm	2	1	24	720
HIGH ABSORPTION HIDRO PRO SPONGE	24967	PRO	6 11/16x4x2 3/4" 17x10x7 cm	3	3	24	720

SPONGE FLOAT SUPERPRO





- Floats with SUPERPRO sponge for grout cleaning and finishing.
- PLUS model has cuts for increased performance in wiping away dirt.

	REF	\triangle			6		
SPONGE FLOAT SUPERPRO	20924	SUPER PRO	11 1/16x7 11/16x1" 28x19.5x2.5 cm	1	2	10	180
SPONGE FLOAT SUPERPRO PLUS	20908	SUPER PRO	11 1/16x7 11/16x1" 28x19.5x2.5 cm	1	2	10	180


REPLACEABLE SUPERPRO SPONGES 12" X 5 11/32" (30X13,5CM)











- Float sponges for cleaning and finishing tile and grout jobs. Interchangeable sponges adaptable to the ergonomic handle. (Ref. 22912) and secure attachement to other brands.
- Sponges available with different levels of absorption and resistance to abrasion. Comfortable and secure attachement system.
- · PLUS models have cuts for increased drag on the dirt.

	REF	\triangle		\bigoplus	6		
FLOAT WITH REPLACEABLE SUPERPRO SPONGE	22900	SUPERPRO	12x5 5/16x1 9/16" 30x13.5x4 cm	1	2	10	180
FLOAT WITH REPLACEABLE SWEEPEX SUPERPRO SPONGE	22916	SUPERPRO	12x5 5/16x1 9/16" 30x13.5x4 cm	3	3	10	180
REPLACEABLE SUPERPRO SPONGE	22910	SUPERPRO	12x5 5/16x1 9/16" 30x13.5x4 cm	1	2	10	320
REPLACEABLE SUPERPRO SPONGE PLUS	22918	SUPERPRO	12x5 5/16x1 9/16" 30x13.5x4 cm	1	2	10	320
REPLACEABLE EPOXY CELLULOSE SUPERPRO SPONGE	22932	SUPERPRO	12x5 5/16x1 3/16" 30x13.5x3 cm	4	4	10	
REPLACEABLE SWEEPEX SUPERPRO SPONGE	22922	SUPERPRO	12x5 5/16x1 3/16" 30x13.5x3 cm	3	3	10	320
REPLACEABLE SWEEPEX SUPERPRO SPONGE PLUS	22914	SUPERPRO	12x5 5/16x1 9/16" 30x13.5x4 cm	3	3	10	320



























HANDLE FOR INTERCHANGEABLE SPONGES AND FOAMS



RUBBER FOAM SUPERPROFLOAT REPLACEMENTS







• The PLUS model has slits for increased performance drag dirt.

	REF			6	\bigoplus		
SPONGE FLOAT PRO	24974	PRO	11 1/16x5 1/2x1 3/16" 28x14x3 cm	3	3	10	240
SPONGE FLOAT PRO PLUS	24988	PRO	11 1/16x5 1/2x1 3/16" 28x14x3 cm	3	3	10	240



- · Adaptable to 12" x 5 11/32" (30 x 13.5 cm.)
- \cdot and 13 13/32" x 6 3/4" (34 x 17 cm.) SUPERPRO sponges and foam replacements.

	REF	\triangle	
HANDLE FOR INTERCHANGEABLE SPONGES	77917	SUPERPRO	10
AND FOAMS	22912	SUPERPRU	10



- · Rubber foam sponges basis for finishing and final cleanings, adaptable to ergonomic handle (Ref. 22912)
- · Available with different hardness and abrasiveness rubber-foam.

	REF	\triangle		
REPLACEMENT RUBBER FOAM	77974	SUPERPRO	12x5 5/16x3/8"	10
BIG CELL SOFT-L SUPERPRO	22924	SUPERPRU	30x13.5x1 cm	10

RUBBER FOAM PLASTIC HANDLE SUPERPRO FLOATS





- \cdot For surface finishing and final cleaning.
- · Ergonomic plastic handle.
- Different types of rubber foam and hardness, depending on the type of finish.



	REF	\triangle				
RUBBER FOAM BIG CELL SOFT-L	72985	SUPERPRO	10x4 5/16x9/16"	6	540	
SUPERPRO FLOAT	/2985 50		25x11x1.5 cm	U	J40	
RUBBER FOAM MEDIUM CELL	72986	SUPERPRO	10x4 5/16x9/16"	6	540	
SOFT-M SUPERPRO FLOAT	72700	JUPERPRU	25x11x1.5 cm	0	340	
RUBBER FOAM SMALL CELL	77000	SUPERPRO	10x4 5/16x9/16"	,	540	
HARD-S SUPERPRO FLOAT	72988 SI		25x11x1.5 cm	6	540	

RUBBER FOAM PRO FLOAT





 \cdot For finishing and final cleaning of surfaces.

	REF	\triangle			
COARSE RUBBER FOAM PRO FLOAT 11 1/32" X 5 1/2" (28 X 14 CM.)	24971	PRO	11 1/16x5 1/2x13/16" 28x14x2 cm	10	360
FINE RUBBER FOAM PRO FLOAT 11 1/32" X 5 1/2" [28 X 14 CM.]	24973	PRO	11 1/16x4 3/4x13/16" 28x12x2 cm	10	360

XX

(o)

SUPERPRO SPONGE WITH BASE FOR WASHBOY



##

(o)

XX







- · Large area reinforced base.
- · Especially for use with PLUS RUBICLEAN SUPERPRO washboy.
- · Handle included (Ref.70904).
- · Polyurethane Sponge.

	REF				6		
SWEEPEX SUPERPRO SPONGE WITH BASE FOR WASHBOY	20914	SUPERPRO ¹	3 3/8x6 11/16x1 15/16" 34x17x5 cm	3	3	1	168
REPLACEMENT SWEEPEX SUPERPRO SPONGE WITH BASE FOR WASHBOY	20919	SUPERPRO ¹	3 3/8x6 11/16x1 15/16" 34x17x5 cm	3	3	1	

- · To clean ceramic surfaces and other materials.
- Float with three different roughness replaceable pads; soft [red], medium [blue] and hard [brown].
- · Float with three very stuff pads (white).
- · 3 sets of pads: very soft (white), soft (red), medium (blue) and hard (brown).
- · Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).

	REF	$\triangle \varnothing$	
FLOAT + 3 MIXED PADS	20900	SUPERPRO 10x4x1" 25x10x2.5 cm	1
FLOAT + 3 VERY SOFT PADS	20944	SUPERPRO 10x4x1" 25x10x2.5 cm	1
3 PADS REPLACEMENT SET - VERY SOFT	20971	10x4x1" SUPERPRO 25x10x2.5 cm	1
3 PADS REPLACEMENT SET - MEDIUM	20973	SUPERPRO 10x4x1" 25x10x2.5 cm	1
3 PADS REPLACEMENT SET - HARD	20974	SUPERPRO 10x4x1" 25x10x2.5 cm	1
3 PADS REPLACEMENT SET - SOFT/MEDIUM/HARD	20902	SUPERPRO 10x4x1" 25x10x2.5 cm	1

STANDARD SWEEPEX | HIDRO CELLULOSE ABRASIVE













SWEEPEX® is a registered trade mark.



















XX





















WASHBOYS

· Different model of washboys for cleaning away grout or final clean of Tiling iob.



- · Plastic washboy, lightweight and high resistance.
- · Equipped with 3 spiral rollers for further draining.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. [24 I.]
- · Useful capacity: 2.2 gl. (10 l.)
- · Dimensions: 20 7/8" x 11 1/32" x 14 9/16" [53 x 28 x 37 cm].
- \cdot Supplied assembled and in 1 unit box.


	REF	\triangle		
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	SUPERPRO	1	18

RUBICLEAN EASYPRO





- · Lightweight, strong plastic bucket.
- · Lower grate level. Requires less water. More lightweight.
- · Removable rollers. Easier cleaning.
- · Metal reinforcement on the rollers. Greater resistance.
- · Capacity 24 litres.



RUBICLEAN SUPERPRO



- · Plastic washboy, light and heavy duty, with two squeeze rollers and separation-decantation system of sewage.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 4.2 gl. (19 l.)
- · Dimensions: 20 1/2" x 10 5/8" x 12" (52 x 27 x 30 cm).
- · Supplied assembled and in 1 unit case.
- · Available in Palbox of 10 units (Ref. 69964).

	REF	\triangle		
RUBICLEAN SUPERPRO WASHBOY	21998	SUPERPRO	1	18



RUBICLEAN PRO

RUBICLEAN PRO 1 SET

曲

(o)

XX



- · Plastic washboy with two squeeze rollers.
- · Wheels built into the base.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 3.7 gl. (17 l.)
- · Dimensions: 20 1/2" x 10 5/8" x 10 1/4" [52 x 27 x 26 cm].
- · Supplied assembled and in 1 unit case.
- · Available in Palbox of 12 units (Ref. 69948).

	REF	\triangle		
RUBICLEAN PRO WASHBOY	25949	PRO	1	18



- · Consisting of:
- · RUBICLEAN PRO washboy (Ref. 25949).
- · Sponge float PRO (Ref. 24974).
- · Grout float PRO 11"x5"x13/32" [28x14x1cm] [Ref. 24969].

	REF	\triangle		
RUBICLEAN PRO 1 SET	68902	PRO	1	18

RUBICLEAN PRO 2 SET



- · Consisting of:
- · RUBICLEAN PRO washboy (Ref. 25949).
- · Float with replaceable SWEEPEX SUPERPRO sponge (Ref. 22916).
- · Rubber grout float SUPERPRO (Ref. 65971).
- \cdot 45° Notched trowel 11" [28 cm] 13/32"x13/32" [10x10] [Ref. 75948].

	REF	\triangle		
RUBICLEAN PRO 2 SET	69949	PRO	1	18



- · Consisting of:
- · RUBICLEAN SUPERPRO washboy (Ref. 21998).
- · Sponge float SUPERPRO (Ref. 20924).
- · Termoflex rubber grout float SUPERPRO (Ref. 65976).

	REF	\triangle		
RUBICLEAN SUPERPRO 2 SET	69915	SUPERPRO	1	18





RUBILIM



##

(o)

Powerful and versatile Cleans, polishes, brightens, grout, crystallizes, and waxing by changing the accessory.









- · 3 working speeds: 60, 120, 180 r.p.m.
- · IP
- · Handles high strength aluminum with rubber coating.
- · With instant soft start and stop, maintains a large performance cleaning, polishing floors and crystallized.
- · Handlebar locking system.
- · Rubber wheels placed in external position for stability.
- Band incorporates neutral color bumpers to avoid staining the walls.
- · Electric cord; 33 ft. (10 m.).
- \cdot Includes Polypropylene brush (Ref. 60970) and liquid tank of 2.9 gl. (13 l.).





XX

2 cv/hp



232

NATURAL FIBRE BRUSH

CARBORUNDUM BRUSH





ACCESSORIES FOR ROTARY CLEANING

· Rotating machines with a wide range of accessories for cleaning and paving treatments



· For cleaning delicate surfaces and shining of waxes.

	REF	\triangle	
NATURAL FIBRE BRUSH 20" (50 CM.)	60979	SUPERPRO	1



· Special carborundum & polyamide brush for very aggressive cleaning.

	REF	\triangle	
CARBORUNDUM BRUSH 20" (50 CM.)	61921	SUPERPRO	1

DIAMONDIZED STRIP





- · For smoothing and polishing marble, terrazzo and granite.
- \cdot Best performance 10,750 Sq. ft. (1000 m2) recommended the simultaneous use of 4 units. Use with support 60954 or 60974. 60 [green/very abrasive], 120 [black/abrasive], 220 (orange/medium], 400 (brown/soft), 800 (white/very soft)

	REF	\triangle	
DIAMONDIZED STRIP - GRAIN 60	61902	SUPERPRO	4
DIAMONDIZED STRIP - GRAIN 120	61903	SUPERPRO	4
DIAMONDIZED STRIP - GRAIN 220	61904	SUPERPRO	4
DIAMONDIZED STRIP - GRAIN 400	61905	SUPERPRO	4
DIAMONDIZED STRIP - GRAIN 800	61906	SUPERPRO	4

PAD HOLDER





· Base to adapt pads, diamond strips and steel wool.

	REF	\triangle	
PAD HOLDER 20" (50 CM.)	60974	SUPERPRO	1



#

























##

0

XX

ABRASIVE PAD



SOFT PAD







	REF	\triangle	
VERY ABRASIVE PAD 20" (50 CM.)	60975	SUPERPRO	5

· For standard floors and deep cleaning.

	REF	\triangle	
ABRASIVE PAD 20" (50 CM.)	60976	SUPERPRO	5

· To be used in marble and other soft surfaces.

	REF	\triangle	
SOFT PAD 20" (50 CM.)	60977	SUPERPRO	5

VERY SOFT PAD





STEEL WOOL





- · To crystallize surfaces of natural stone and terrazzo.
- · No.1 for delicate surfaces.
- · No. 2 for normal surfaces.
- · Packaging: Bag of 4 coils of 5.5 lb (2.5 kg).
- · Necessary to use CRYSTALLIZER liquid.

	REF	\triangle	
STEEL WOOL №1	61916	SUPERPRO	1
STEEL WOOL №2	61914	SUPERPRO	1









· Support that allows the setting of 4 stones to polish type "Frankfurt".

	REF	\triangle	
FRANKFURT ABRASIVE STONE SUPPORT 20" [50 CM.]	60965	SUPERPRO	1











PAL BOX AND DISPLAYS

Index by references







PAL BOX AND DISPLAYS

 Product display units for placement of product at selling point.





- · Contains x135 units of ref. 20905.
- · Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm).

	REF	\triangle		
SUPERPRO SPONGE PALBOX	69955	SUPERPRO	1	4



- · Contains x135 units or ref. 20906.
- · Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm).

	REF	\triangle	
MIXED SUPERPRO SPONGE PALBOX	69957	SUPERPRO	1
























##

⊙

Ċ

XX

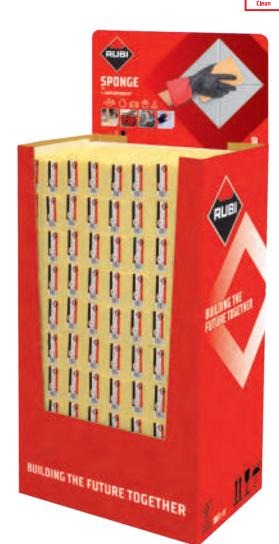

- · Contains x160 units of ref. 24967.
- · Dimensions: 23" x 15" x 42" [60 x 40 x 105 cm].

	REF	\triangle	
HIDRO PRO SPONGE PALBOX	69979	PRO	1



- · Ready to use by just removing the cover.
- · It contains:
- · 20 DELTA Levelling System kits.
- · Measurements: 60 x 40 x 105 cm.

	REF	\triangle		
DELTA LEVELLING SYSTEM 1MM PAL BOX (20 UN.)	03917	SUPERPRO	1	2
DELTA LEVELLING SYSTEM 1,5MM PAL BOX (20 UN.)	03918	SUPERPRO	1	2
DELTA LEVELLING SYSTEM 2MM PAL BOX (20 UN.)	03919	SUPERPRO	1	2



- · Contains x10 units of Ref. 21998.
- · Washboys are NOT supplied assembled.
- · Dimensions: 22" x 12" x 42" (56 x 31 x 109 cm).

	REF	\triangle	
RUBICLEAN SUPERPRO TRAY PALBOX	69964	SUPERPRO	1



GENERAL DISPLAY STAND





















RUBICLEAN PRO






- · Contains x12 units of Ref. 25949.
- · Washboys are NOT supplied assembled.
- · Dimensions: 22" x 12" x 42" (56 x 31 x 109 cm).

	REF	\triangle	
RUBICLEAN PRO TRAY PALBOX	69948	PRO	1

DISPLAYS

 Various display units to show RUBI products, optimizing space available and helping to promote sales.

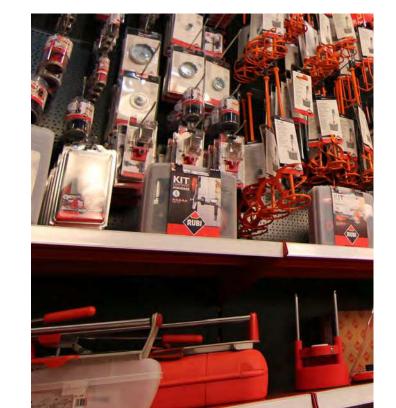





,		
	REF	
GENERAL DISPLAY 40" X 89" (100CM X 225CM)	90311	1
GENERAL DISPLAY 25" X 89" (65CM X 225CM)	90312	1
GENERAL DISPLAY 40" X 89" (100CM X 40CM) SHELF	90570	1
GENERAL DISPLAY 40" (100 CM.) TRAY	90606	1
GENERAL DISPLAY 25" X 89" (65CM X 40CM) SHELF	90571	1
GENERAL DISPLAY 25" (65 CM.) TRAY	90607	1

DISPLAY FOR RUBI MIXERS

DISPLAY FOR MANUAL TILE CUTTERS

DISPLAY FOR 4DRILL BITS



NEW

· Display stand to hold two mixers and various mixing paddles.

	REF	
DISPLAY FOR MIXERS	91908	1



	REF		
DISPLAY FOR MANUAL CUTTERS.	90305	1	6



- · Desktop dispenser display with six hooks for hanging 4DRILL bits of different diameters.
- · With front bar and key locking for anti-theft security.

	REF	
DISPLAY FOR 4DRILL BITS	91907	1

DISPLAY FOR EASYGRES DRILL BITS



· Table top display for Easy Gres sets and drill bits of various diameters.

	REF	
DISPLAY STAND FOR EASYGRES DRILL BITS	90176	1

DISPLAY FOR RUBI SCORING WHEELS



· Table top display for various scoring wheels.

	REF	
DISPLAY STAND FOR SCORING WHEELS	90177	1

DISPLAY FOR RUBI DIAMOND BLADES



NEW

- · Desktop Display for blade saws up to 5" (120mm).
- · With front bar and key locking for anti-theft security. · capacity: 36 blades 4 1/2", 5" (115mm,125mm).

	REF	
DISPLAY FOR DIAMOND BLADES	92854	1

##

(o)

<u>t</u>

XX



0

INDEX BY REFERENCE

	REF PAG															
Part	01900 57	02867 205	04916 127	05981 131	14980 41	20905 226	25905 168	30960 119	35942 207	50998 109	56937 91	62977 143	66906 182	72908 166	75970 165	82961 188
Part	01901 58	02868 205	04917 127	05982 132	14981 41	20906 226	25906 168	30961 119	35943 207	50999 109	56938 91	62986 143	66907 182	72909 166	76808 169	82963 188
Section Sect	01903 57	02869 205	04918 130	05985 222	14982 41	20907 222	25907 168	30962 119	35944 207	51908 132	56939 91	65450 176	66924 184	72910 166	76809 169	82964 188
Part	01906 55	02870 205	04919 131	05988 126	14985 43	20908 227	25910 113	30963 119		51914 101	56940 99	65900 182	66929 80	72911 166	76907 155	
Part	01907 56	02890 203	04920 130	05989 127	14986 43	20914 229	25912 118	30964 119	35946 207	51915 100	56941 91	65904 182	66940 179	72915 164	76917 157	82986 186
Second	01945 55	02892 203	04921 131	05990 127	14987 43	20917 226	25913 118	30972 114	35947 207	51916 100	56942 99	65905 182	66941 179	72919 166	76918 157	83942 61
See	01946 55	02893 203	04922 130	05991 127	14988 41	20918 226	25915 112	30973 114	35948 207	51927 100	56943 91	65907 177	66942 179	72941 180	76919 157	83992 173
1	01947 56	02894 203	04923 130	05992 127	14989 41	20919 229	25916 112	30974 112	35949 207	51929 128	56947 91	65908 182	66952 80	72953 180	76920 194	83993 173
Final Street Fina	01948 56	02895 203	04924 130	05994 126	14990 41	20924 227	25917 113	30976 112	35950 207	51931 128	56948 99	65919 176	66957 220	72954 156	76922 194	83998 173
	01949 55	02901 197		06826 205	15901 47	20928 226	25918 113	30986 113	35951 207	51937 128	56949 91	65925 61	68902 231	72960 177	76923 194	
	01950 56	02902 197	04928 131		15902 47	20932 226	25925 97	30987 113	35952 207	51939 129	57991 100	65926 61	68923 128	72961 177	76924 194	84924 173
1	01958 55	02903 197	04929 131	06828 205	15903 47	20944 229	25926 97	30995 116	35953 207	51957 75	58850 102	65931 157	69915 231	72980 80	76926 194	84925 173
1	01959 56	02904 198	04962 126	06829 205	15904 47	20971 229	25927 97	30997 116	35954 207	51959 73	58851 102	65933 157	69948 240	72985 228	76927 194	88513 212
1	01960 60	02905 198	04963 130	06900 128	16900 71	20973 229	25934 118	31906 121	35955 207	51961 73	58852 102	65934 157	69949 231	72986 228	76929 194	88514 213
	01991 57	02911 196	04964 126	06915 128	16901 106	20974 229	25940 152	31909 121	35956 207	51969 75	58853 102	65935 175	69955 238	72988 228	76930 194	88515 212
	01992 57	02912 196	04965 126	06918 128	16946 107	20992 226	25942 152	31915 113	35957 207	51979 75	58854 102	65939 157	69957 238	73909 176	76931 194	88516 213
1	01993 57	02923 199	04970 130	06919 128	16956 106	21945 230	25943 153	31932 114	35958 207	52905 85	58856 102	65940 184	69964 239	73911 176	76932 194	88517 212
	01995 58	02924 199	04971 130	06929 128	16957 107	21995 230	25944 152	31933 114	35959 207	52906 85	58863 102	65942 181	69979 238	73912 176	76933 194	88519 213
Colural 197 Colural 197 Colural 198 Colural 198 Colural 199 Colural 19	01996 58	02926 199	04972 130	06971 128	16958 107	21998 230	25945 97	31934 114	35960 207	52915 85	60202 158	65943 220	70902 176	73913 176	76934 194	88520 213
	02000 197	02931 197	04973 130	06972 128	16984 107	22900 227	25946 157	31935 114	35961 207	52916 85	60265 158	65946 184	70904 176	73914 176	76935 194	88553 182
Cours 1946 1949	02001 197	02941 203	04974 130	06973 128	16985 107	22906 226	25949 231	31936 120	35962 207	52917 85	60926 80	65950 164	70905 175	73973 164	76937 195	88555 182
Color: 196	02002 197	02950 199	04975 130	06974 128	17905 31	22910 227	25955 52	31937 120	35963 207	52918 85	60965 234	65951 167	70916 187	74936 166	76938 195	88712 215
Color: 190 Colo	02030 196	02951 199	04976 130	06975 128	17906 31	22912 228	25956 52	31938 120	35964 207	52919 85	60974 233	65954 175	70917 187	74937 166	76939 195	88720 216
Column C	02031 196	02952 197	04977 130	06976 128	17909 29	22914 227	25963 97	31939 120	35965 207	52920 87	60975 234	65957 177	70918 187	74938 166	76940 157	88721 216
Coltable	02036 198	02953 197	04981 130	06977 128	17915 29	22916 227	26965 147	31964 116	37116 170	52922 87	60976 234	65958 164	70924 187	74940 166	76941 155	88723 216
Coll-16 199 Coll-16 19	02063 199	02954 197	04992 126	06978 128	17921 29	22918 227	26966 147	31965 116	37118 170	52930 87	60977 234	65959 164	70925 180	74941 166	76942 155	88724 216
Coligo 199 Coligo 199 Coligo 198 188 1901 35 1902 27 2799 26 2697 349 3197 155 3738 70 5794 89 60994 196 6596 677 7092 181 7094 166 7094 166 8877 2799 260 2697 2799 2	02123 199	02972 197	04995 126	06979 128	17951 27	22922 227	26970 149	31966 120	37258 170	52940 87	60978 234	65960 164	70926 181	74942 166	76943 155	88725 216
Coling C	02124 199	02973 197	05917 138	06980 128	17952 27	22924 228	26971 149	31967 120	37314 170	52942 87	60979 233	65962 177	70928 181	74947 164	76945 156	88726 216
Column C	02125 199	02974 197	05918 138	10607 174	17953 27	22928 226	26972 149	31969 120	37316 170	52945 87	60991 180	65963 177	70929 181	74948 164	76946 156	88728 216
Cultist Pop	02127 199	02989 203	05919 138	11900 35	17954 27	22929 226	26973 149	31972 115	37318 170	52960 89	60993 196	65966 167	70930 61	74980 166	76947 166	88729 216
Color Colo	02130 199	03900 203	05920 138	11901 37	18819 78	22932 227	26974 149	31973 115	37520 171	52961 89	60994 196	65967 167	70964 196	74982 166	76971 156	88760 210
02279 199 03918 239 05732 129 1293 65 1891 77 2 24958 152 30882 113 31979 140 45916 96 52971 89 61902 233 65972 170 71898 186 75420 169 77118 170 88771 215 02397 199 03979 205 059724 129 12954 55 37 18917 80 24966 227 30888 113 31981 10 45916 96 54822 101 61902 233 65973 174 71899 186 75902 195 7728 170 88773 216 02840 205 03930 205 05972 129 12956 55 18920 39 24968 174 30902 116 32998 115 50971 177 54971 80 24968 277 30888 18978 24969 174 30902 116 32998 115 50971 177 54971 80 24968 278 34969 174 30902 116 32998 115 50971 177 54971 93 61905 233 65970 174 71923 165 75902 195 7736 170 88775 216 02840 205 03932 205 05979 129 1296 150 18922 39 24969 174 30902 116 32998 115 50971 177 54971 93 61905 233 65990 190 71924 165 75908 195 77316 170 88775 214 02842 205 03992 205 05979 129 12981 50 18922 39 24969 174 30902 116 32998 174 175 54971 39 61905 233 65990 190 71924 165 75908 195 77316 170 88775 214 02842 205 03992 205 05979 129 12981 50 18922 39 24969 174 30902 116 32998 115 50971 127 54971 39 61905 233 65990 190 71924 165 75908 195 77316 170 88775 214 02842 205 03992 205 05979 129 12981 50 18922 39 24969 174 30902 116 32998 115 50971 132 54913 39 61906 233 65990 190 71924 165 75908 195 77316 170 88776 214 02842 205 03992 205 05979 130 13993 45 18923 39 24971 1228 30924 114 32934 177 50936 127 54974 95 61916 234 65981 190 71925 165 75908 195 77316 170 88778 216 02852 205 03994 205 05963 131 13941 45 18994 79 24974 228 30926 118 32935 117 50938 127 54974 95 61976 123 65988 164 71926 165 75923 167 77418 171 90177 241 02852 205 03995 205 05963 131 14907 33 18948 81 24996 151 30929 188 32994 177 50939 104 54975 95 61976 143 65998 144 71926 165 75923 167 77418 171 91717 241 02852 205 03995 205 05963 131 14908 48 18978 79 24978 128 30924 118 32971 177 50939 104 54975 95 61976 143 65998 144 71926 145 75992 116 80913 229 0505 03964 111 14908 33 18992 99 24968 123 30924 118 32971 177 50935 155 54977 95 61976 143 65998 144 71926 145 75992 116 80913 2400 02852 050 03994 118 14908 49 18978 97 24988 228 30948 118 32971 177 509	02132 199	03901 205	05921 139	11973 35	18910 78	22950 226	26975 149	31974 140	38416 171	52962 89	60996 165	65968 167	70965 195	75012 169	76972 156	88765 210
02396 199 03919 229 0590 05926 129 1295 37 18919 80 24966 27 20888 113 131980 113 45916 96 52972 89 61902 233 65973 170 71898 186 75420 169 77118 170 88773 215 02397 199 0250 05926 129 12955 37 18919 80 24967 272 50888 113 181982 113 51980 113 45916 96 54822 1011 61903 233 65973 174 71999 186 75901 195 77258 170 88773 216 02840 205 03931 205 05928 129 12957 37 18921 39 24968 174 30902 116 32992 115 50971 127 54911 95 61906 233 65976 174 71997 180 150 75901 195 77314 170 88775 215 02841 205 03953 205 05928 129 12957 37 18921 39 24968 174 30902 116 32993 115 50971 132 54913 93 65980 190 71924 165 75904 195 77314 170 88775 215 02841 205 03953 205 05928 199 1298 130 13999 45 18933 39 24969 174 30902 116 32993 115 50971 132 54913 93 65980 190 71924 165 75909 195 77316 170 88775 215 02841 205 03953 205 05961 131 13940 45 18934 97 24971 228 30904 118 32935 115 50971 132 54913 93 65980 190 71924 165 75909 195 77316 170 88778 216 02846 205 03953 205 05961 131 13940 45 18934 97 24971 228 30925 118 32944 117 50973 132 54918 72 61916 234 65981 190 71925 165 75909 195 77316 170 88778 216 02846 205 03953 205 05962 131 13941 45 18955 79 24974 228 30926 118 32995 117 50938 127 54974 95 61921 233 65988 164 71926 165 75913 169 77320 170 90116 241 02851 205 03955 205 03963 205 03963 213 14907 33 18998 81 14908 81 14908 33 18972 39 24986 128 30924 118 32994 117 50974 152 54977 95 61921 233 65988 164 71943 173 75925 181 79050 711 90311 240 02852 205 03956 205 03965 131 14904 33 18972 39 24986 125 30978 118 32974 117 50974 152 54977 95 61976 143 65988 164 71943 173 75925 181 79050 711 90311 240 02852 205 03956 205 03965 131 14904 33 18978 39 24986 125 30978 118 32974 117 50974 15 54978 190 114 64974 173 7598 165 80998 212 90050 224 90050	02135 199	03917 238		11974 37			26980 151			52970 89	60997 165		71896 186	75014 169	76973 156	88770 214
02397 199 03929 205 05926 129 1295 37 18919 80 24966 27 3088 113 31980 113 45916 96 54822 101 61903 233 65973 174 71899 186 75901 195 77258 170 88773 216 02849 705 03930 705 05927 129 12956 55 18920 39 24968 174 30900 116 32908 115 50917 127 54911 93 61095 233 65975 174 71904 175 75902 195 77268 170 88773 215 02841 205 03931 205 05928 129 12957 37 18912 39 24968 174 30900 116 32908 115 50917 127 54911 93 61095 233 65976 174 71904 175 75904 195 77268 170 88773 215 02841 205 03932 205 05929 129 12981 50 18922 39 24968 174 30902 116 32928 115 50918 12 54918 30 61904 234 65980 190 71924 165 75906 195 77316 170 88776 214 02842 705 03932 705 05939 130 19339 45 18923 39 24971 228 30904 114 32933 115 50936 127 54918 30 61914 234 65981 1970 19725 165 75905 195 77316 170 88776 214 02842 705 03952 705 05958 131 13940 45 18938 79 24973 228 30926 118 32934 117 50937 132 54918 72 61914 234 65981 1970 19725 165 75913 169 77320 170 091076 241 02850 205 03954 205 05962 131 13940 45 18938 79 24978 228 30926 118 32935 117 50938 127 54974 95 61974 34 36 65981 164 71924 155 75913 169 77320 170 7188 171 90177 241 02851 205 03955 205 05964 131 14908 33 18959 69 24985 51 30930 118 32936 117 50939 104 54975 95 61974 143 65988 164 71924 173 75924 167 77328 166 90305 241 02852 705 03956 205 03956 205 03956 131 14908 33 18976 39 24988 128 30924 118 32974 117 50957 132 54978 95 61974 143 65988 164 71944 173 75946 167 70923 166 90305 241 02852 705 03956 205 03956 205 03956 131 14908 33 18959 69 24985 151 30930 118 32974 117 50955 75 54979 95 61974 143 65988 164 71944 173 75946 167 80913 222 90510 240 02855 205 03956 131 14908 33 18976 89 24988 128 30945 118 32972 117 50955 75 54979 101 62970 124 66810 180 71944 173 75956 165 80918 222 90510 240 02855 205 03956 131 14948 49 18976 79 24988 128 30949 118 35510 169 50957 105 54979 101 62970 142 66810 180 71974 177 75958 165 80918 222 90510 240 02855 205 04904 131 05969 131 14948 49 18976 79 24988 124 30946 118 35510 169 50957 105 55905 95 6277 142 66810 180 71974 177 75958 165 80918 221 91070 2	02279 199	03918 239		12923 60	18914 58	24956 97	26981 151	31978 115	45911 96	52971 89	60998 180	65971 174	71897 186	75418 169	77116 170	
02889 205 03930 205 05927 129 1295 35 18920 39 24967 227 30888 113 31982 113 50903 130 54844 101 61904 233 6597 174 71904 175 75902 195 77268 170 88774 216 02840 205 03931 205 05928 129 1299 12957 37 18921 39 24969 114 39902 116 32932 115 50917 127 54911 93 61905 233 65976 174 71923 165 75904 195 77314 170 88775 215 02841 205 03932 205 05929 129 12918 550 18922 39 24969 144 39902 116 32932 115 50917 127 54913 49 18902 139 24969 144 144 32933 115 50936 127 54914 93 61906 233 65980 190 71925 165 75909 195 77314 170 88778 214 02842 205 03953 205 05961 131 13940 45 18934 79 24973 228 30925 118 32934 117 50938 127 54914 93 61906 233 65980 190 71925 165 75909 195 77318 170 88778 214 02865 205 03953 205 05961 131 13940 45 18935 79 24974 228 30925 118 32934 117 50939 127 54974 95 61912 32 54918 49 56 61914 234 65981 140 17926 165 75913 140 170 90176 241 02865 205 03955 205 05963 131 13940 45 18935 79 24974 228 30925 118 32935 117 50938 127 50938 127 54974 95 61912 33 65988 164 71927 165 75913 169 77320 170 90176 241 02851 205 03955 205 05963 131 14907 33 18948 81 24984 81 30929 118 32935 117 50939 104 54975 95 61974 143 65988 164 71941 173 75925 161 79023 140 02852 205 03956 205 05963 131 14907 33 18978 91 2498 152 30931 118 32940 112 50944 127 54976 95 61975 143 65988 164 71944 173 75925 181 79050 171 90311 240 02852 205 03958 205 05966 131 14903 39 2498 152 30931 118 32974 117 50947 132 54971 10 61977 143 65989 164 7194 173 75956 167 80913 222 90312 240 02855 205 04904 131 05967 131 14944 49 18978 79 2498 154 30940 118 32974 117 50953 73 54991 101 62970 142 66810 180 7191 189 75950 165 80913 222 90570 240 02855 205 04904 131 05967 131 14945 49 18978 79 24998 154 30950 118 35910 10 50957 105 54999 101 62970 142 66810 180 7191 189 7595 165 80913 222 90570 240 02855 205 04910 127 05972 181 14946 49 18978 79 24998 154 30950 118 35951 19 55908 95 62971 142 66810 180 7191 189 7595 165 81999 221 92854 241 02860 198 04912 127 05976 131 14976 43 20900 229 25900 168 30958 19 35950 207 50950 105 55905 95 62971 142 66801 180 719	02396 199			12954 35			30882 113			52972 89			71898 186			
02840 05 03931 05 05928 129 1291 1291 50 18921 39 24968 174 30900 116 32908 115 50917 127 54911 93 61905 233 65976 174 71923 165 75904 195 77314 170 88775 215 02841 205 03932 205 05939 129 1290 130 13939 45 18923 39 24976 174 30902 116 32932 115 50936 127 54914 93 61910 71924 165 75905 195 77316 170 88776 214 02864 205 03933 205 05961 131 13940 45 18923 79 24978 228 30925 118 32933 117 50936 127 54914 93 61914 234 65982 164 71926 165 75913 169 77320 170 9016 241 02851 205 03953 205 05962 131 13941 45 18925 79 24974 228 30926 118 32935 117 50936 127 54974 95 61921 233 65983 164 71927 165 75913 169 77320 170 90176 241 02851 205 03955 205 05963 131 14907 33 18948 81 24984 51 30929 118 32936 117 50939 114 54975 95 61974 143 65984 164 71924 165 75923 167 77418 171 90117 241 02852 205 03956 205 05964 131 14907 33 18948 81 24984 51 30929 118 32936 117 50939 114 54975 95 61974 143 65984 164 71944 173 75924 167 77923 166 90305 241 02852 205 03956 205 05965 131 14907 33 18948 81 24984 51 30929 118 32940 112 50944 127 54976 95 61975 143 65988 164 71944 173 75924 167 77923 166 90305 241 02852 205 03958 205 05965 131 14907 33 18949 89 24988 152 30911 118 32974 117 50947 152 54977 95 61976 143 65989 164 71944 173 75946 167 80913 222 90312 2400 02855 205 03958 205 05966 131 14904 49 18975 99 24988 228 30945 118 32974 117 50947 152 54977 95 61976 143 65989 164 71944 173 75946 167 80913 222 90310 2400 02855 205 04904 131 05967 131 14944 49 18975 99 24984 154 30946 118 32974 117 50953 73 54991 101 64977 143 65989 164 71944 173 75946 167 80913 222 90310 2400 02855 205 04904 131 05967 131 14944 49 18975 79 24998 154 30946 118 33974 117 50953 105 54993 101 62970 142 66811 180 71970 161 75955 165 80993 118 90007 240 02859 198 04911 127 05973 100 14947 49 18979 79 24998 154 30945 118 35937 207 50969 105 55903 95 62971 142 66811 180 71971 189 75997 165 81998 221 91907 241 02861 198 04913 127 05976 112 14975 43 18992 77 25901 168 30955 119 35993 207 50964 105 55908 95 62973 142 66904 182 77906 166 75952 165 81998 221 91907 241 02861 19	02397 199	03929 205	05926 129	12955 37	18919 80	24966 227	30883 113	31980 113	45916 96	54822 101	61903 233	65973 174	71899 186	75901 195	77258 170	88773 216
02841 205 03932 205 05929 129 12981 50 18922 39 24969 174 30902 116 32932 115 50936 127 54914 93 61906 233 65980 190 71924 165 75905 195 77316 170 88776 214 02824 205 03952 205 05959 130 13939 45 18923 39 24971 228 30904 114 32933 115 50936 127 54914 93 61914 234 65981 190 71925 165 75909 195 77318 170 88778 214 02850 205 05952 205 05962 131 13940 45 18935 79 24973 228 30925 118 32935 117 50937 132 54918 72 61916 234 65982 164 71924 165 75939 169 77320 170 90176 241 02850 205 05962 131 13941 45 18935 79 24973 228 30925 118 32935 117 50938 127 54974 95 61921 233 65983 164 71927 165 75923 167 77418 171 90177 241 02851 205 03955 205 03963 131 14907 33 18948 81 24984 51 30929 118 32936 117 50939 104 54975 95 61974 143 65988 164 71924 173 75924 167 77923 166 91305 241 02852 205 03955 205 05963 131 14909 33 18959 69 24985 51 30939 118 32940 112 50944 127 50949 154 50958 154 14909 33 18979 49 1897 39 24988 228 30945 118 32971 117 50947 132 54970 95 61975 143 65988 164 71944 173 75924 167 79050 71 90311 2400 02855 205 03958 205 05966 131 14909 33 18979 89 24988 228 30945 118 32971 117 50947 132 54970 95 61975 143 65988 164 71944 173 75924 167 80933 222 90570 240 02855 205 04904 151 05967 151 14945 49 18975 39 24988 228 30945 118 32971 117 50947 132 54970 95 61975 143 65988 164 71944 173 75946 167 80913 222 90570 240 02855 205 04904 151 05967 151 14945 49 18976 78 24995 154 30949 118 32971 117 50953 73 54991 101 61977 143 65989 164 71954 185 75948 167 80913 222 90570 240 02855 205 04904 151 05967 151 14945 49 18976 78 24995 154 30949 118 35520 169 50957 105 54999 101 62970 142 66811 180 71970 61 75958 165 80913 119 00607 240 02858 205 04904 127 05973 100 14948 49 18978 79 24998 154 30951 118 35520 169 50958 105 55905 95 62971 142 66811 180 71970 61 75958 165 80913 119 75957 165 80913 119 75957 165 80913 119 75957 165 80913 119 75958 105 55905 95 62971 142 66811 180 71970 61 75958 165 80913 119 75957 165 80913 119 75959 120 55906 95 62971 142 66811 180 71970 166 75962 165 80999 201 92859 120 14026 14026 14026 14026 14026	02839 205	03930 205	05927 129	12956 35	18920 39	24967 227	30888 113	31982 113	50903 130	54844 101	61904 233	65975 174	71904 175	75902 195	77268 170	88774 216
02842 205 03952 205 05961 31 13940 45 18923 39 24971 228 30904 114 32933 115 50936 127 54914 93 61914 234 65981 190 71925 165 75909 195 77318 170 88778 216 10286 205 03953 205 05961 31 13940 45 18934 79 24973 228 30925 118 32934 117 50937 132 54918 72 61916 234 65982 164 71926 165 75913 169 77320 170 91176 241 02851 205 03954 205 05962 131 13941 45 18935 79 24978 228 30926 118 32936 117 50939 114 54975 95 61974 143 65984 164 71924 173 75924 167 77418 171 909177 241 02852 205 03955 205 05963 311 14907 33 18948 81 24994 51 30929 118 32936 117 50939 114 54975 95 61974 143 65984 164 71943 173 75924 167 77492 166 90305 24985 205 03955 205 05964 131 14908 33 18959 69 24985 51 30930 118 32940 112 50944 127 54976 95 61975 143 65985 164 71943 173 75925 181 79050 171 90311 240 02852 205 03955 205 05964 131 14909 33 18979 69 24985 51 30930 118 32940 112 50944 127 54976 95 61976 143 65985 164 71943 173 75925 181 79050 171 90311 240 02852 205 03956 205 05964 131 14908 33 18979 49 24988 122 30931 118 32971 117 50947 132 54977 95 61976 143 65988 164 71944 173 75925 181 79050 171 90311 240 02855 205 03956 205 05966 131 14944 49 18975 39 24988 128 30945 118 32972 117 50953 73 54991 101 61977 143 65989 164 71954 185 75947 167 80913 222 90570 240 02855 205 04909 131 05969 131 14945 49 18976 78 24995 154 30946 118 32974 117 50953 73 54991 101 61977 142 66811 180 71967 185 75948 167 80914 222 90570 240 02856 205 04910 127 05972 184 14946 49 18978 81 24996 154 30949 118 35931 169 50958 105 55903 95 62971 142 66811 180 71970 61 75955 165 81998 221 91007 241 02860 198 04911 127 05973 100 14947 49 18979 79 24998 154 30945 118 35937 207 50959 105 55905 95 62971 142 66811 180 71971 189 75957 165 81999 221 9100 241 02860 198 04911 127 05973 100 14947 49 18979 79 24998 154 30945 118 35937 207 50959 105 55905 95 62971 142 66811 180 71971 197 75955 165 81999 221 9100 241 02860 198 04912 127 05976 131 14976 43 18980 60 25900 168 30955 119 35940 207 50954 105 55908 95 62975 142 66801 180 71971 197 75957 165 81999 221 9100 241 02860 198 04911 1	02840 205	03931 205	05928 129	12957 37	18921 39	24968 174	30900 116	32908 115	50917 127	54911 93	61905 233	65976 174	71923 165	75904 195	77314 170	88775 215
0286	02841 205		05929 129	12981 50		24969 174	30902 116	32932 115		54913 93	61906 233		71924 165	75905 195		
02850 205 03954 205 05963 131 13941 45 18935 79 24974 228 30926 118 32936 117 50938 127 54974 95 61921 233 65983 164 71927 165 75923 167 77418 171 90177 241 02851 205 03955 205 05963 131 14907 33 18948 81 24984 51 30929 118 32936 117 50939 104 54975 95 61974 143 65988 164 71941 173 75924 167 77923 166 90305 241 02853 205 03956 205 05964 131 14908 33 18979 69 24985 51 30920 118 32940 112 50944 127 54976 95 61975 143 65985 164 71944 173 75925 181 79050 171 90311 240 02853 205 03957 205 05966 131 14909 33 18972 39 24986 122 30931 118 32971 117 50945 37 54991 101 61977 143 65988 164 71944 173 75946 167 80903 222 90312 240 02855 205 04904 131 05967 131 14944 49 18975 39 24988 228 30945 118 32974 117 50945 37 54991 101 62970 126 66810 180 71969 158 75947 167 80913 222 90570 240 02856 205 04909 131 05969 131 14945 49 18976 78 24995 154 30949 118 35518 169 50957 105 54999 101 62970 142 66810 180 71969 158 75950 165 80918 222 90606 240 02859 198 04911 17 05972 184 14946 49 18978 81 24996 154 30950 118 35520 169 50958 105 55903 95 62971 142 66810 180 71970 61 75955 165 80933 181 90607 240 02859 198 04911 17 05973 100 14947 49 18979 79 24998 154 30951 118 35520 169 50958 105 55903 95 62971 142 66810 180 71974 177 75958 165 81989 221 91907 241 02864 198 04912 127 05973 100 14947 49 18970 62590 168 30955 119 35939 207 50964 109 55907 95 62971 142 66801 180 71974 177 75959 165 81989 221 91907 241 02864 198 04912 127 05976 132 14975 43 18982 77 25901 168 30955 119 35939 207 50964 109 55907 95 62975 142 66801 180 71974 177 75959 165 81989 221 92854 241 02864 198 04912 127 05976 132 14975 43 18982 77 25901 168 30955 119 35939 207 50964 109 55907 95 62975 142 66900 182 75904 166 75962 164 81999 221	02842 205					24971 228		32933 115	50936 127	54914 93	61914 234	65981 190	71925 165	75909 195		
02851 205 03955 205 05964 31 14907 33 18948 81 24984 51 30929 118 32936 117 50939 104 54975 95 61974 143 65984 164 71941 173 75924 167 77923 166 90305 241 02852 205 03956 205 05964 131 14908 33 18959 69 24985 51 30930 118 32940 112 50944 127 54976 95 61975 143 65985 164 71943 173 75925 181 79050 171 90311 240 02853 205 03957 205 05965 131 14909 33 18972 39 24986 152 30931 118 32971 117 50947 132 54977 95 61976 143 65988 164 71944 173 75946 167 80903 222 90312 240 02855 205 03958 205 05966 131 14943 49 18974 39 24988 228 30945 118 32974 117 50958 105 54991 101 61977 143 65989 164 71944 173 75946 167 80913 222 90570 240 02855 205 04904 131 05967 131 14944 49 18975 39 24994 154 30946 118 32974 117 50958 105 54993 101 62969 232 65990 190 71967 158 75948 167 80914 222 90571 240 02856 205 04909 131 05969 131 14945 49 18976 78 24995 154 30949 118 35512 169 50958 105 54999 101 62970 142 66810 180 71970 158 75955 165 80918 212 90606 240 02858 205 04910 127 05973 100 14947 49 18979 79 24998 154 30951 118 35938 207 50952 105 55905 95 62973 142 66813 180 71974 177 75958 165 81998 221 91907 241 02861 198 04912 127 05973 130 14946 49 18980 60 25900 168 30955 119 35938 207 50964 109 55907 95 62974 142 66813 180 71974 177 75958 165 81998 221 91907 241 02861 198 04913 127 05978 131 14976 43 20900 229 2590 168 30958 119 35908 207 50964 109 55907 95 62973 142 66813 180 71974 177 75958 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 2590 168 30958 119 35908 207 50964 109 55907 95 62975 142 66813 180 71974 177 75958 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 2590 168 30958 119 35908 207 50964 109 55907 95 62975 142 66813 180 71974 177 75959 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 2590 168 30958 119 35904 207 50964 105 55908 95 62975 142 66813 180 71974 177 75958 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 2590 168 30958 119 35904 207 50964 105 55908 95 62975 142 66801 182 72906 166 75962 166 81999 221	02846 205	03953 205	05961 131	13940 45	18934 79	24973 228	30925 118	32934 117		54918 72	61916 234	65982 164	71926 165	75913 169		
02852 205 03956 205 05965 131 14908 33 18959 69 24985 51 30930 118 3290 112 50944 127 54976 95 61975 143 65985 164 71943 173 75925 181 79050 171 90311 240 02853 205 03957 205 05965 131 14909 33 18972 39 24986 152 30931 118 32971 117 50947 132 54977 95 61976 143 65989 164 71944 173 75946 167 80903 222 90312 240 02854 205 03958 205 05966 131 14943 49 18974 39 24988 228 30945 118 32972 117 50953 73 54991 101 61977 143 65989 164 71954 185 75947 167 80913 222 90570 240 02855 205 04904 131 05967 131 14944 49 18975 39 24994 154 30946 118 32974 117 50956 105 54993 101 62967 252 65990 190 71967 158 75948 167 80914 222 90571 240 02856 205 04909 131 05969 131 14945 49 18976 78 24995 154 30949 118 35518 169 50957 105 54999 101 62970 142 66810 180 71969 158 75955 165 80938 122 90606 240 02858 205 04910 127 05973 100 14947 49 18979 79 24998 154 30951 118 35937 207 50959 105 55905 95 62971 142 66811 180 71971 189 75957 165 81998 221 91907 241 02861 198 04912 127 05973 100 14948 49 18980 60 25900 168 30955 119 35938 207 50964 109 55907 95 62974 142 66813 180 71974 177 75958 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50954 105 55905 95 62975 142 66810 180 71974 177 75959 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50954 105 55905 95 62975 142 66813 180 71974 177 75959 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50954 105 55905 95 62975 142 66801 180 71974 177 75959 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50954 105 55905 95 62975 142 66801 180 71974 177 75959 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50954 105 55905 95 62975 142 66801 180 71974 177 75959 165 81998 221 92854 241 02864 198 04914 127 05978 131 14976 43 18992 77 25901 168 30958 119 35940 207 50954 105 55905 95 62975 142 66801 180 71974 177 75959 165 81999 221 92854 241	02850 205		05962 131	13941 45			30926 118			54974 95	61921 233		71927 165	75923 167		
02853 205 03958 205 05966 131 14909 33 18972 39 24986 152 30931 118 32971 117 50953 73 54991 101 61977 143 65989 164 71954 185 75947 167 80913 222 90570 240 180 180 180 180 180 180 180 180 180 18				14907 33	18948 81		30929 118			54975 95	61974 143		71941 173			
02854 205 03958 205 05966 131 14943 49 18974 39 2498 228 30945 118 32972 117 50955 73 54991 101 61977 143 65989 164 71954 185 75947 167 80913 222 90570 240 140 140 140 140 140 140 140 140 140 1	02852 205	03956 205		14908 33	18959 69		30930 118	32940 112		54976 95	61975 143		71943 173	75925 181		
02855 205 04904 131 05967 131 14944 49 18975 39 24994 154 30946 118 32974 117 50956 105 54993 101 62969 232 65990 190 71967 158 75948 167 80914 222 90571 240 02856 205 04909 131 05969 131 14945 49 18976 78 24995 154 30949 118 35518 169 50957 105 54999 101 62970 142 66810 180 71969 158 75950 165 80918 222 90606 240 04912 127 05972 184 14946 49 18978 81 24996 154 30950 118 35520 169 50958 105 55903 95 62971 142 66811 180 71970 61 75955 165 80933 181 90607 240 04912 127 05973 100 14947 49 18978 81 24998 154 30951 118 35937 207 50959 105 55905 95 62972 142 66812 180 71971 189 75957 165 81989 221 91907 241 02860 198 04912 127 05974 100 14947 49 18980 60 25900 168 30955 119 35938 207 50964 109 55907 95 62974 142 66900 182 72844 175 75958 165 81998 221 92854 241 02864 198 04912 127 05976 132 14975 43 18982 77 25901 168 30956 119 35938 207 50964 109 55907 95 62975 142 66900 182 72824 175 75959 165 81998 221 92854 241 02864 198 04912 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50964 109 55907 95 62975 142 66900 182 72824 175 75959 165 81998 221 92854 241 02864 198 04912 127 05976 131 14976 43 20900 229 25902 168 30958 119 35940 207 50964 109 55907 95 62975 142 66900 182 72824 175 75959 165 81998 221 92854 241 02864 198 04912 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50964 109 55907 95 62975 142 66900 182 72824 175 75959 165 81998 221 92854 241 02864 198 04912 127 05976 131 14976 43 20900 229 25902 168 30958 119 35940 207 50964 105 55938 95 62975 142 66900 182 72824 175 75959 165 81998 221 92854 241 02864 198 04912 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50964 105 55938 95 62975 142 66900 182 72804 175 75959 165 81998 221 92854 241 02864 198 04912 127 05978 131 14976 43 18900 04912 127 05978 131 14976 43 18900 04912 127 05978 131 14976 43 18900 04912 127 05978 131 14976 43 18900 04912 127 05978 131 14976 43 18900 04912 127 05978 128000 04912 127 05978 12800 04912 127 05978 12800 04912 127 05978 12800 04912 127 05978 12800 04912 127 05978 12800 04912 127 05978			05965 131	14909 33			30931 118				61976 143		71944 173			
02856 205 0499 131 05969 131 14945 49 18976 78 2495 154 30949 118 35518 169 5057 105 5499 101 62970 142 66810 180 7199 158 7590 165 80918 222 9060 240 140 140 140 140 140 140 140 140 140 1	02854 205	03958 205		14943 49	18974 39		30945 118	32972 117	50953 73	54991 101	61977 143	65989 164	71954 185	75947 167	80913 222	
0288	02855 205						30946 118									
02859 198 0491 17 05973 100 1494 49 18979 79 2498 154 30951 118 35935 207 50962 108 55905 95 62972 142 66812 180 71971 189 7597 165 81989 221 91907 241 02861 198 04912 17 05978 131 14976 43 2090 229 2590 168 30958 119 35948 207 50964 109 55908 95 62973 142 66903 182 7290 168 30958 119 35948 207 50964 109 55908 95 62973 142 66903 182 72894 175 75959 165 81999 221 92854 241 02864 198 04914 177 05978 131 14976 43 2090 229 2590 168 30958 119 35948 207 50964 109 55908 95 62975 142 66903 182 72894 175 7596 166 81999 221 92854 241 02864 198 04914 177 05978 131 14976 43 2090 229 2590 168 30958 119 35948 207 50964 109 55908 95 62975 142 66903 182 72894 175 7596 166 81999 221 92854 241 02864 198 04914 178 04978 149	02856 205	04909 131	05969 131	14945 49	18976 78	24995 154	30949 118	35518 169	50957 105	54999 101	62970 142	66810 180	71969 158	75950 165	80918 222	90606 240
02860 198 04912 17 05974 100 14948 49 1898 60 2590 188 3995 119 35958 207 50962 108 55906 95 62973 142 66813 180 71974 177 75958 165 81994 220 91908 241 050 0508 198 0509 1998 1998 1998 1998 1998 1998 1998 19	02858 205	04910 127		14946 49	18978 81		30950 118	35520 169		55903 95	62971 142	66811 180	71970 61	75955 165		
02861 198 04913 127 05976 132 14975 43 18982 77 25901 168 30956 119 35994 17 05976 198 131 14976 43 20900 229 25902 168 30958 119 35940 207 50948 105 55938 95 62975 142 66904 182 72804 175 75959 165 81998 221 92854 241	02859 198	04911 127	05973 100	14947 49	18979 79	24998 154	30951 118	35937 207	50959 105	55905 95	62972 142	66812 180	71971 189	75957 165	81989 221	91907 241
02864 198 04914 127 05978 131 14976 43 20900 229 25902 168 30958 119 35940 207 50994 105 55938 95 62975 142 66904 182 72906 166 75962 164 81999 221	02860 198	04912 127	05974 100	14948 49	18980 60	25900 168	30955 119	35938 207	50962 108	55906 95	62973 142	66813 180	71974 177	75958 165	81994 220	91908 241
	02861 198				18982 77	25901 168	30956 119				62974 142		72824 175	75959 165		92854 241
02866 205 04915 127 05979 131 14977 43 20902 229 25903 168 30959 119 35941 207 50996 127 55939 95 62976 142 66905 182 72907 166 75965 185 82960 188	02864 198	04914 127	05978 131	14976 43	20900 229	25902 168	30958 119	35940 207	50994 105	55938 95	62975 142	66904 182	72906 166	75962 164	81999 221	
	02866 205	04915 127	05979 131	14977 43	20902 229	25903 168	30959 119	35941 207	50996 127	55939 95	62976 142	66905 182	72907 166	75965 185	82960 188	



XX

SYMBOLOGY AND CERTIFICATIONS

In this catalogue to provide reader's with the maximum amount of information and to be as clearly as possible, we have used the following symbols:

Bags per box

№ tile spacers per bag

Tile spacers for box

Height of bucket

Bottom diameter

Top diameter

Useable height

Sponge size

[1-4]

Cutting Length

Cutting height

Separator power

Absorption level (1-4)

Resistance to abrasion



Phase 1: Prepare

Phase 2: Cut & Drill

Phase 3: Set



Phase 5: Clean







PATENTED Patented



Patent Pending



Units per box

Cutting length

Diagonal cutting length

Cutting height

Separator power

Net weight without packaging

Gross weight

With carrying case

Weight with carrying case

Power supply

Revolutions per minute



Mitre cutting length

Mitre Thickness cut

Maximum cutting thickness - 1 stroke or 2 strokes Length Width Height (machine overall dimensions)

Wall chaser effect



With blade



Inside diameter





Segment Thickness



Maximum drill length

Max Height of the head

Rod's head diametre

Wide notched trowel

Notched height trowel

Notched Radius Trowel

Trowel length

Trowel width

Mixing capacity



Fixed separator



Mobile separator



Repetitive cuts



Base accessory

45° cuts



Angular measuring



Dual reinforced guide



PURE POWER



MAGNET





One Hand Action



Back pack optional



Bearing system



Easy fix





INCH/MM. ruler





Foldable head



Plunge Effect



Folding legs



Mobile cart



Tip-up table for mitring



Zero Dust



1 hour of continous work maximum, recommended



3 hours of continous work maximum, recommended 6 hours of continous work maximum,

recommended by TNO



Level



Laser C3 system



Wet cutting Dry cutting





Motor Brushless LI-ION BATTERY



Energy





Resistant to extreme temperatures Hardness and



Robustness









Flexible



Comfort Reinforced



Strong





Light



Easy use



Reduced dust and noise



Easy cleaning



Rubi Group comply with the Directive 2002/96/ EC on waste electrical and/or electronic and Directive 2002/95/EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria. (WEEE, WEEE, ECORAEE, etc...) (RoHS).

Images are for illustration purposes and may change

*The gross weight of some electrical machines may vary depending on the type of pallet and carton type used in packaging.

**Any manipulation or modification of machine voids the warranty. Our warranty covers defects in manufacturing or assembly in accordance with the applicable law.

Note: Any reproduction of all or part of this catalogue without prior approval of Germans Boada, SA is forbidden



European Regulatory Commission



Russian legislation EAC



Normative UK



TÜV safety rules





















曲























RUBICLUB

JOIN THE COMMUNITY OF 70.000+ EXPERTS IN THE ART OF TILING

- 1. SIGN UP IN LESS THAN 1 MINUTE
- 2. EXTEND THE WARRANTY OF YOUR PURCHASES EASILY
- 3. GAIN ACCESS TO EXCLUSIVE BENEFITS AND GIFTS

SCAN THE OR CODE OR ENTER WWW.RUBI.COM





aftersales@rubi.com rubi.com





RUBI GROUP

GERMANS BOADA, S.A. BARCELONA (OFICINAS CENTRALES)

MADRID

RUBI PORTUGAL

RUBI FRANCE S.A.R.L.

Bâtiment le Vancouver

RUBI TOOLS USA Inc. US

RUBI UK LTD. UK

ΙE Ferry Lane

RUBI POLSKA Sp. z o.o.

RUBI BENELUX BV

LU BE **RUBI DEUTSCHLAND GmbH**

T. 49 (0) 2161 990 60 90

RUBI ROSSIA

RUBI CANADA

Suzhou Rubi Technologies Co. ,Ltd.

中国江苏省苏州工业园区亭和路86号2号厂房 苏州瑞比机电科技有限公司 邮政编码: 215121

RUBI INDIA

RUBI COLOMBIA

T. (+571) 749 85 08

RUBI CHILE

RUBI MIDDLE EAST

GERMANS BOADA MEXICO

RUBI MAROC

1075, Bd. Mohamed VI Rés. Fath Zhar

